

2000–2013 PASSENGER CAR CHILD PASSENGER SAFETY SUPPLEMENT

Chrysler/Dodge/Fiat/Plymouth/SRT



FIAT CHRYSLER AUTOMOBILES

©2015 FCA US LLC. All Rights Reserved.

Chrysler, Dodge, Fiat, Plymouth and SRT are registered trademarks of FCA US LLC.

1	INTRODUCTION	2
2	INSTALLING CHILD RESTRAINTS	4
3	INSTALLING CHILD RESTRAINTS IN YOUR VEHICLE — CHRYSLER	8
4	INSTALLING CHILD RESTRAINTS IN YOUR VEHICLE — DODGE	50
5	INSTALLING CHILD RESTRAINTS IN YOUR VEHICLE — FIAT / PLYMOUTH / SRT	87
6	INDEX	96

INTRODUCTION

CONTENTS

- Welcome From FCA US LLC.3
- How To Use This Supplement.3

Welcome From FCA US LLC

If you have opened this guide, chances are you have questions about the correct use of child restraints in your vehicle. This supplement has been developed to help answer those questions. This document is intended to supplement the information provided in the Owner's Manual and/or User Guide that came with your vehicle. If you no longer have your Owner's Manual or User Guide, please visit www.techauthority.com to order a replacement.

This guide does not cover the proper selection of car seats or the proper usage of car seats. For questions about car seat selection and usage, please visit NHTSA's website: <http://www.safercar.gov/parents/Car-Seat-Safety.htm>. This website also features videos showing step-by-step installation of different types of car seats.

How To Use This Supplement

The first chapter of this supplement, "Installing Child Restraints," provides general information about the installation of child restraints in vehicles. It provides step-by-step instructions for installing a car seat using either the seat belts or the LATCH anchorages in your vehicle. Read this section to learn how to:

- Locate LATCH and Tether anchorages in vehicles
- Install a car seat using LATCH
- Install a car seat using seat belts

This section also includes key warnings about the misuse of car seats. Read and follow all of these warnings when transporting children in your vehicle.

The remaining chapters provide information that is specific for the Brand, Model and Model Year of your vehicle. To use this section, first refer to the table of contents to find your vehicle. Some listings will include a range of model years. Click on the section for your vehicle to find information about:

- Locating the LATCH anchorages in your vehicle
- Frequently asked questions about LATCH
- Directions for locating and using the Tether Anchorages in your vehicle
- Seat belt systems in your vehicle for installing car seats
- Frequently asked questions about seat belts and car seats

Copyright ©2015 FCA US LLC

INSTALLING CHILD RESTRAINTS

CONTENTS

■ Installing Child Restraints	5	■ How To Stow An Unused ALR Seat Belt	6
■ Rear-Facing Car Seats And Air Bags	5	■ Installing Child Restraints Using The Vehicle Seat Belt	6
■ Passenger Air Bag Disable (PAD) Indicator Light — If Equipped	5	■ Installing A Child Restraint With A Switchable Automatic Locking Retractor (ALR) — If Equipped . . .	6
■ Lower Anchors And Tethers For CHildren (LATCH) Restraint System	5	■ Installing A Child Restraint With A Cinching Latch Plate (CINCH) — If Equipped	7
■ Locating The LATCH And Tether Anchorages	5	■ Installing Child Restraints Using The Top Tether Anchorage	7
■ Installing Child Restraints Using The LATCH Lower Anchorages	5		

Installing Child Restraints

Children 12 years or younger should ride properly buckled up in a rear seat, if available. According to crash statistics, children are safer when properly restrained in the rear seats rather than in the front.

Every state in the United States and all Canadian provinces require that small children ride in proper restraint systems. This is the law, and you can be prosecuted for ignoring it.

NOTE: For additional information, refer to www.seatcheck.org or call 1-866-SEATCHECK. Canadian residents should refer to Transport Canada's website for additional information: <http://www.tc.gc.ca/eng/motorvehiclesafety/safedrivers-childsafety-index-53.htm>

Rear-Facing Car Seats And Air Bags

WARNING!

- Never place a rear-facing child restraint in front of an air bag. A deploying passenger Advanced Front Air Bag can cause death or serious injury to a child 12 years or younger, including a child in a rear-facing child restraint.
- Only use a rear-facing child restraint in a vehicle with a rear seat.

Passenger Air Bag Disable (PAD) Indicator Light — If Equipped

The PAD is an amber light located in the instrument panel which tells the driver and front passenger when the front passenger air bag is turned off. The PAD indicator light illuminates to show that the passenger air bag will not inflate during a collision requiring air bags. The PAD light will illuminate when the passenger frontal air bag has been turned off by using the manual ON/OFF switch. Refer to your Owner's Manual for additional information.

Lower Anchors And Tethers For Children (LATCH) Restraint System



022668173

Your vehicle is equipped with the child restraint anchorage system called LATCH, which stands for Lower Anchors and Tethers for CHildren. The LATCH system has three vehicle anchor points for installing LATCH-equipped child seats.

There are two lower anchorages located at the back of the seat cushion where it meets the seatback and one top tether anchorage located behind the seating position. These anchorages are used to install LATCH-equipped child seats without using the vehicle's seat belts. Some seating positions may have a top tether anchorage but no lower anchorages. In these seating positions, the seat belt must be used with the top tether anchorage to install the child restraint.

NOTE: The LATCH system was phased into vehicles during the 2000–2002 model years. Certain 2000 and 2001 model year vehicles did not feature lower anchorages. These vehicles had tether anchorages only. See the section “LATCH and Tethers in Your Vehicle” for more information.

Locating The LATCH And Tether Anchorages

The lower anchorages are round bars that are found at the rear of the seat cushion where it meets the seatback. If the bars are not readily visible, they are located below the anchorage symbols on the seatback (if equipped). You will easily feel them if you run your finger along the gap between the seatback and seat cushion.



There are tether strap anchorages behind the rear seating positions located in the panel between the rear seatback and the rear window. They are found under a plastic cover with the tether anchorage symbol on it. Vehicles that do not have this panel will have tether anchorages located on the back of the seat or near the floor. See the section “LATCH and Tethers in Your Vehicle” for more information about finding tethers in your vehicle, as some may be hidden behind a panel or cover.

Always follow the directions of the child restraint manufacturer when installing your child restraint. Not all child restraint systems will be installed as described here.

Installing Child Restraints Using The LATCH Lower Anchorages

1. If the selected seating position has a Switchable Automatic Locking Retractor (ALR) seat belt, stow the seat belt, following the instructions below. See the section “Seat Belt Systems in Your Vehicle” to check what type of seat belt each seating position has.
2. Loosen the adjusters on the lower straps and on the tether strap of the child seat so that you can more easily attach the hooks or connectors to the vehicle anchorages.
3. Place the child seat between the lower anchorages for that seating position. For some second row seats, you may need to recline the seat and/or raise the head restraint to get a better fit. If the rear seat can be moved forward and rearward in the vehicle, you may wish to move it to its rear-most position to make room for the child seat. You may also move the front seat forward to allow more room for the child seat.

6 INSTALLING CHILD RESTRAINTS

- Attach the lower hooks or connectors of the child restraint to the lower anchorages in the selected seating position.
- If the child restraint has a tether strap, connect it to the top tether anchorage. See the section "LATCH and Tethers in Your Vehicle" for directions to attach a tether anchor.
- Tighten all of the straps as you push the child restraint rearward and downward into the seat. Remove slack in the straps according to the child restraint manufacturer's instructions.
- Test that the child restraint is installed tightly by pulling back and forth on the child seat at the belt path. It should not move more than 1 inch (25.4 mm) in any direction.

How To Stow An Unused ALR Seat Belt

When using the LATCH attaching system to install a child restraint, stow all ALR seat belts that are not being used by other occupants or being used to secure child restraints. An unused belt could injure a child if they play with it and accidentally lock the seat belt retractor. Before installing a child restraint using the LATCH system, buckle the seat belt behind the child restraint and out of the child's reach. If the buckled seat belt interferes with the child restraint installation, instead of buckling it behind the child restraint, route the seat belt through the child restraint belt path and then buckle it. Do not lock the seat belt. Remind all children in the vehicle that the seat belts are not toys and that they should not play with them.

WARNING!

- **Improper installation of a child restraint to the LATCH anchorages can lead to failure of the restraint. The child could be badly injured or killed. Follow the child restraint manufacturer's directions exactly when installing an infant or child restraint.**
- **Child restraint anchorages are designed to withstand only those loads imposed by correctly-fitted child restraints. Under no circumstances are they to be used for adult seat belts, harnesses, or for attaching other items or equipment to the vehicle.**

Installing Child Restraints Using The Vehicle Seat Belt

The seat belts in the passenger seating positions are equipped with either a Switchable Automatic Locking Retractor (ALR) or a cinching latch plate or both. Both types of seat belts are designed to keep the lap portion of the seat belt tight around the child restraint so that it is not necessary to use a locking clip.

The ALR retractor can be "switched" into a locked mode by pulling all of the webbing out of the retractor and then letting the webbing retract back into the retractor. If it is locked, the ALR will make a clicking noise while the webbing is pulled back into the retractor. For additional information on ALR,

refer to the section "Seat Belt Systems in Your Vehicle." The cinching latch plate is designed to hold the lap portion of the seat belt tight when webbing is pulled tight and straight through a child restraint's belt path.

When installing a forward-facing child restraint, always use the tether anchor up to the maximum weight allowed. See the section "LATCH and Tethers in Your Vehicle" for more information about LATCH weight limits.

Installing A Child Restraint With A Switchable Automatic Locking Retractor (ALR) — If Equipped

- Place the child seat in the center of the seating position. For some second row seats, you may need to recline the seat and/or raise the head restraint to get a better fit. If the rear seat can be moved forward and rearward in the vehicle, you may wish to move it to its rear-most position to make room for the child seat. You may also move the front seat forward to allow more room for the child seat.
- Pull enough of the seat belt webbing from the retractor to pass it through the belt path of the child restraint. Do not twist the belt webbing in the belt path.
- Slide the latch plate into the buckle until you hear a "click."
- Pull on the webbing to make the lap portion tight against the child seat.
- To lock the seat belt, pull down on the shoulder part of the belt until you have pulled all the seat belt webbing out of the retractor. Then, allow the webbing to retract back into the retractor. As the webbing retracts, you will hear a clicking sound. This means the seat belt is now in the Automatic Locking mode.
- Try to pull the webbing out of the retractor. If it is locked, you should not be able to pull out any webbing. If the retractor is **not** locked, repeat step 5.
- Finally, pull up on any excess webbing to tighten the lap portion around the child restraint while you push the child restraint rearward and downward into the vehicle seat.
- If the child restraint has a top tether strap and the seating position has a top tether anchorage, connect the tether strap to the anchorage and tighten the tether strap. See the section "LATCH and Tethers in Your Vehicle" for directions to attach a tether anchor.
- Test that the child restraint is installed tightly by pulling back and forth on the child seat at the belt path. It should not move more than 1 inch (25.4 mm) in any direction.

Any seat belt system will loosen with time, so check the belt occasionally, and pull it tight if necessary.

WARNING!

Do not use the Automatic Locking Mode to restrain occupants who are wearing the seat belt or children who are using booster seats. The locked mode is only used to install rear-facing or forward-facing child restraints that have a harness for restraining the child.

Installing A Child Restraint With A Cinching Latch Plate (CINCH) — If Equipped

- Place the child seat in the center of the seating position. For some second row seats, you may need to recline the seat and/or raise the head restraint to get a better fit. If the rear seat can be moved forward and rearward in the vehicle, you may wish to move it to its rear-most position to make room for the child seat. You may also move the front seat forward to allow more room for the child seat.
- Next, pull enough of the seat belt webbing from the retractor to pass it through the belt path of the child restraint. Do not twist the belt webbing in the belt path.
- Slide the latch plate into the buckle until you hear a “click.”
- Finally, pull up on any excess webbing to tighten the lap portion around the child restraint while you push the child restraint rearward and downward into the vehicle seat.
- If the child restraint has a top tether strap and the seating position has a top tether anchorage, connect the tether strap to the anchorage and tighten the tether strap. See the section “LATCH and Tethers in Your Vehicle” for directions to attach a tether anchor.
- Test that the child restraint is installed tightly by pulling back and forth on the child seat at the belt path. It should not move more than 1 inch (25.4 mm) in any direction.

Any seat belt system will loosen with time, so check the belt occasionally, and pull it tight if necessary.

If the buckle or the cinching latch plate is too close to the belt path opening of the child restraint, you may have trouble tightening the seat belt. If this happens, disconnect the latch plate from the buckle and twist the short buckle-end belt up to three full turns to shorten it. Insert the latch plate into the buckle with the release button facing out, away from the child restraint. Repeat steps 4 to 6, above, to complete the installation of the child restraint.


If the belt still cannot be tightened after you shorten the buckle, disconnect the latch plate from the buckle, turn the buckle around one half turn, and insert the latch plate into the buckle again. If you still cannot make the child restraint installation tight, try a different seating position.

Installing Child Restraints Using The Top Tether Anchorage

See the section “LATCH and Tethers in Your Vehicle” for specific instructions for using the tether anchorages in your vehicle.

WARNING!

Do not attach a tether strap for a rear-facing car seat to any location in front of the car seat, including the seat frame or a tether anchorage. Only attach the tether strap of a rear-facing car seat to the tether anchorage that is approved for that seating position, located behind the top of the vehicle seat. See the section “LATCH and Tethers in Your Vehicle” for the location of approved tether anchorages in your vehicle.

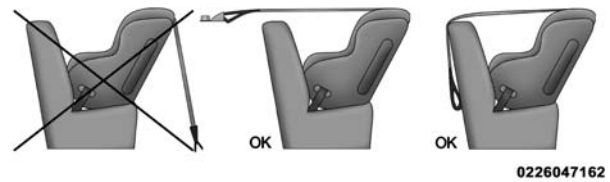

WARNING!

- In a collision, an unrestrained child, even a tiny baby, can become a projectile inside the vehicle. The force required to hold even an infant on your lap could become so great that you could not hold the child, no matter how strong you are. The child and others could be severely injured or killed. Any child riding in your vehicle should be in a proper restraint for the child's size.
- Never place a rear-facing child restraint in front of an air bag. A deploying Passenger Advanced Front Air Bag can cause death or serious injury to a child 12 years or younger, including a child in a rear-facing child restraint.
- Only use a rear-facing child restraint in a vehicle with a rear seat.
- Improper installation of a child restraint to the LATCH anchorages can lead to failure of an infant or child restraint. The child could be severely injured or killed. Follow the manufacturer's directions exactly when installing an infant or child restraint.
- An incorrectly anchored tether strap could lead to increased head motion and possible injury to the child. Use only the anchor positions directly behind the child seat to secure a child restraint top tether strap.
- If your vehicle is equipped with a split rear seat, make sure the tether strap does not slip into the opening between the seatbacks as you remove slack in the strap.

INSTALLING CHILD RESTRAINTS IN YOUR VEHICLE — CHRYSLER


CONTENTS

■ CHRYSLER 200 CONVERTIBLE, 2011–2013	9	□ Connecting The Top Tether Strap (With The Vehicle Seat Belt)	28
□ LATCH And Tethers In Your Vehicle	9	□ Seat Belt Systems In Your Vehicle	29
□ Center Seat LATCH	10	■ CHRYSLER PT CRUISER CONVERTIBLE, 2005–2008	30
□ Connecting The Top Tether Strap (With Either Lower Anchors Or Vehicle Seat Belt)	10	□ LATCH And Tethers In Your Vehicle	30
□ Seat Belt Systems In Your Vehicle	11	□ Center Seat LATCH	31
■ CHRYSLER 200 SEDAN, 2011–2013.	12	□ Connecting The Top Tether Strap (With Either Lower Anchors Or Vehicle Seat Belt)	31
□ LATCH And Tethers In Your Vehicle	12	□ Seat Belt Systems In Your Vehicle	31
□ Center Seat LATCH	13	■ CHRYSLER PT CRUISER SEDAN, 2001–2010.	33
□ Connecting The Top Tether Strap (With Either Lower Anchors Or Vehicle Seat Belt)	13	□ LATCH And Tethers In Your Vehicle	33
□ Seat Belt Systems In Your Vehicle	14	□ Center Seat LATCH	35
■ CHRYSLER 300, 2005–2013.	15	□ Connecting The Top Tether Strap (With Either Lower Anchors Or Vehicle Seat Belt)	35
□ LATCH And Tethers In Your Vehicle	15	□ Seat Belt Systems In Your Vehicle	36
□ Center Seat LATCH	16	■ CHRYSLER SEBRING CONVERTIBLE, 2001–2006, 2008–2010	38
□ Connecting The Top Tether Strap (With Either Lower Anchors Or Vehicle Seat Belt)	16	□ LATCH And Tethers In Your Vehicle	38
□ Seat Belt Systems In Your Vehicle	17	□ Center Seat LATCH	40
■ CHRYSLER 300M, 2000–2004	18	□ Connecting The Top Tether Strap (With Either Lower Anchors Or Vehicle Seat Belt)	40
□ LATCH And Tethers In Your Vehicle	18	□ Seat Belt Systems In Your Vehicle	41
□ Center Seat LATCH	19	■ CHRYSLER SEBRING COUPE, 2000–2005	42
□ Connecting The Top Tether Strap (With Either Lower Anchors Or Vehicle Seat Belt)	19	□ LATCH And Tethers In Your Vehicle	42
□ Seat Belt Systems In Your Vehicle	20	□ Center Seat LATCH	43
■ CHRYSLER CONCORDE, 2000–2004.	22	□ Connecting The Top Tether Strap (With Either Lower Anchors Or Vehicle Seat Belt)	43
□ LATCH And Tethers In Your Vehicle	22	□ Seat Belt Systems In Your Vehicle	44
□ Center Seat LATCH	23	■ CHRYSLER SEBRING SEDAN, 2001–2010	45
□ Connecting The Top Tether Strap (With Either Lower Anchors Or Vehicle Seat Belt)	23	□ LATCH And Tethers In Your Vehicle	45
□ Seat Belt Systems In Your Vehicle	24	□ Center Seat LATCH	47
■ CHRYSLER CROSSFIRE, 2004–2008	26	□ Connecting The Top Tether Strap (With Either Lower Anchors Or Vehicle Seat Belt)	48
□ LATCH And Tethers In Your Vehicle	26	□ Seat Belt Systems In Your Vehicle	48
□ Connecting The Top Tether Strap (With Either Lower Anchors Or Vehicle Seat Belt)	27		
□ Seat Belt Systems In Your Vehicle	27		
■ CHRYSLER LHS, 2000–2001.	28		
□ LATCH And Tethers In Your Vehicle	28		

CHRYSLER 200 CONVERTIBLE, 2011–2013

LATCH And Tethers In Your Vehicle

LATCH Positions For Installing Child Restraints In This Vehicle

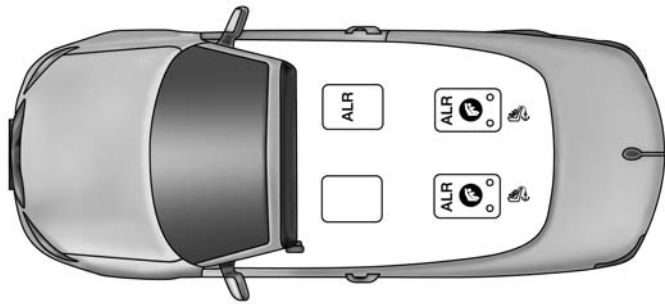


0226076770

2011–2013 Model Years

- ALR — Switchable Automatic Locking Retractor
- Lower Anchorage Symbol (2 Anchorages Per Seating Position)
- Top Tether Anchorage Symbol

Locating The LATCH Lower Anchorages In This Vehicle

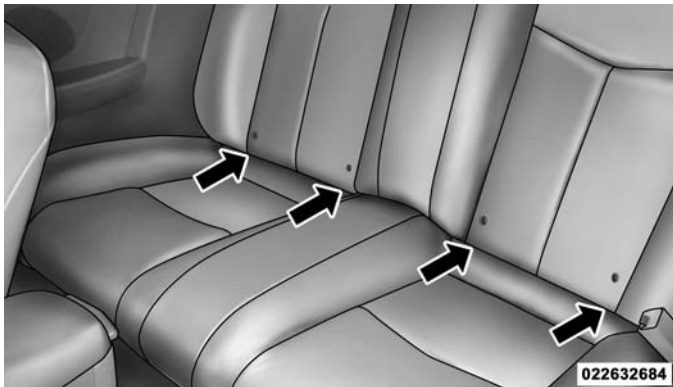


022632684

Rear Seat LATCH Lower Anchorages (2011–2013 Model Years)

Locating The Tether Anchorages In This Vehicle



There are tether strap anchorages behind each rear seating position. Access ports to the tether anchors are located in the panel between the rear seat and the rear window. The tether anchors are underneath access covers in the carpet covering the back of the seat where you see the tether anchorage symbol.

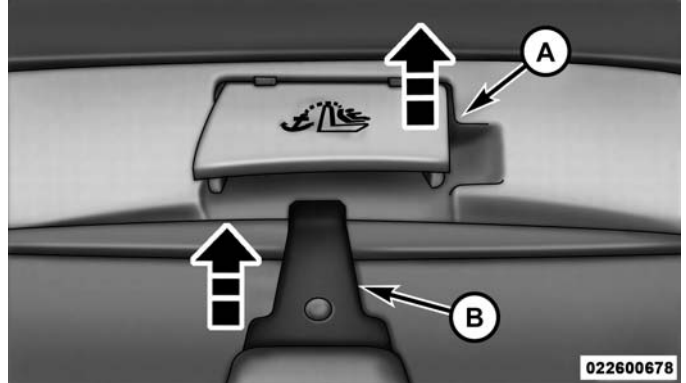


022600678

Child Tether Access Port Cover (2011–2013 Model Years)

A — Cover

B — Tether Strap Hook

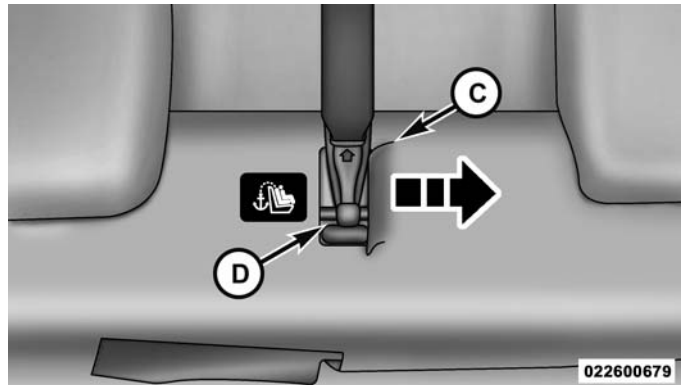

022600679

Child Tether Anchor (2011–2013 Model Years)

C — Attaching Strap

D — Tether Anchor

Frequently Asked Questions About LATCH

What is the weight limit (child’s weight + weight of the child restraint) for using the LATCH anchorage system to attach the child restraint?	65 lbs (29.5 kg)	Use the LATCH anchorage system until the combined weight of the child and the child restraint is 65 lbs (29.5 kg). Use the seat belt alone instead of the LATCH anchorage system once the combined weight is more than 65 lbs (29.5 kg).
Can the LATCH anchorages and the seat belt be used together to attach a rear-facing or forward-facing child restraint?	No	Do not use the seat belt when you use the LATCH anchorage system to attach a rear-facing or forward-facing child restraint.
Can two child restraints be attached using a common lower LATCH anchorage?	No	Never “share” a LATCH anchorage with two or more child restraints.
Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	The child seat may touch the back of the front passenger seat if the child restraint manufacturer also allows contact. See your child restraint Owner’s Manual for more information.
Can the head restraints be removed?	No	


Center Seat LATCH**WARNING!**

This vehicle does not have a center seating position. Do not use the center lower LATCH anchorages to install a child seat in the center of the back seat.

Connecting The Top Tether Strap (With Either Lower Anchors Or Vehicle Seat Belt)

When installing a forward-facing child restraint, always secure the top tether strap, up to the tether anchor weight limit, whether the child restraint is installed with the lower anchors or the vehicle seat belt.

1. If lowered, raise the convertible top. The convertible top must be in the UP position to access the tether anchor.
2. Open the access port cover behind the seat where you are placing the child restraint.
3. Push the tether strap and hook through the access port and down into the trunk. Route the tether strap to provide the most direct path from the child seat to the anchor.

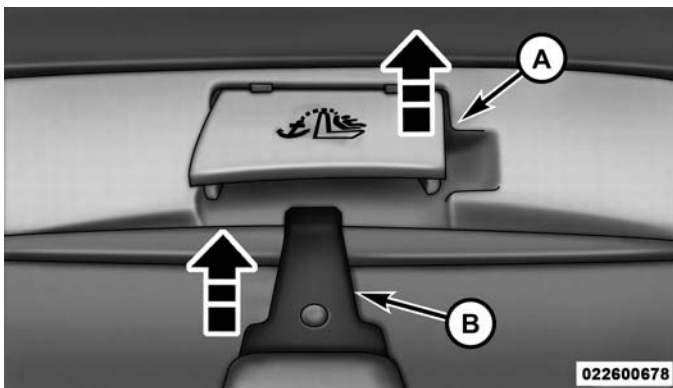


Child Tether Access Port Cover

A — Cover

B — Tether Strap Hook

4. Open the access cover on the carpet covering the back of the seat and attach the tether strap hook to the anchor.

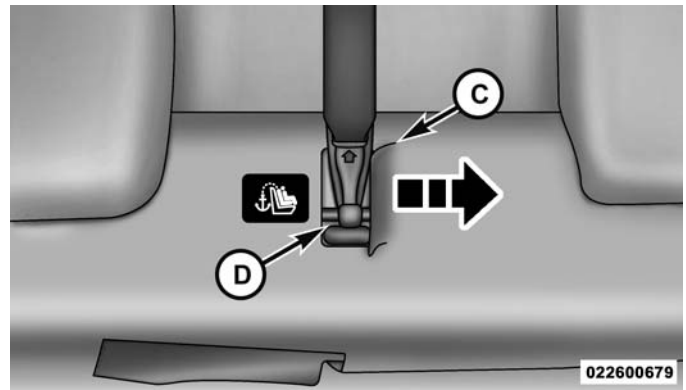

Child Tether Anchor

C — Attaching Strap

D — Tether Anchor


5. Remove slack in the tether strap according to the child restraint manufacturer's instructions.

WARNING!

- An incorrectly anchored tether strap could lead to increased head motion and possible injury to the child. Use only the anchorage position directly behind the child seat to secure a child restraint top tether strap.
- If your vehicle is equipped with a split rear seat, make sure the tether strap does not slip into the opening between the seatbacks as you remove slack in the strap.



Seat Belt Systems In Your Vehicle

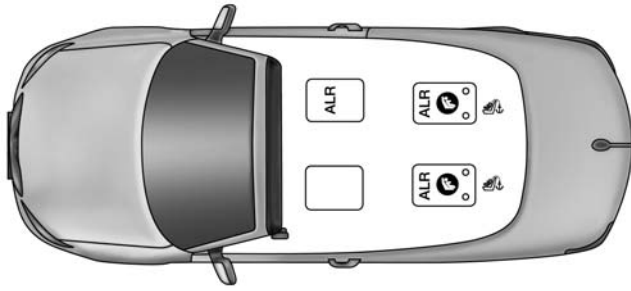Lap/Shoulder Belt Systems For Installing Child Restraints In This Vehicle



0226076770

2011–2013 Model Years


- ALR — Switchable Automatic Locking Retractor
-  Lower Anchorage Symbol (2 Anchorages Per Seating Position)
-  Top Tether Anchorage Symbol

Frequently Asked Questions About Seat Belts And Car Seats		
What is the weight limit (child’s weight + weight of the child restraint) for using the Tether Anchor with the seat belt to attach a forward facing child restraint?	65 lbs (29.5 kg)	The Tether Anchor can be used with the seat belt until the combined weight of the child and the child restraint is 65 lbs (29.5 kg). Use the seat belt without the Tether Anchor once the combined weight is more than 65 lbs (29.5 kg).
Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	Contact between the front passenger seat and the child restraint is allowed, if the child restraint manufacturer also allows contact.
Can the head restraints be removed?	No	
Can the buckle stalk be twisted to tighten the seat belt against the belt path of the child restraint?	No	Do not twist the buckle stalk in a seating position with an ALR retractor.

CHRYSLER 200 SEDAN, 2011–2013

LATCH And Tethers In Your Vehicle

LATCH Positions For Installing Child Restraints In This Vehicle

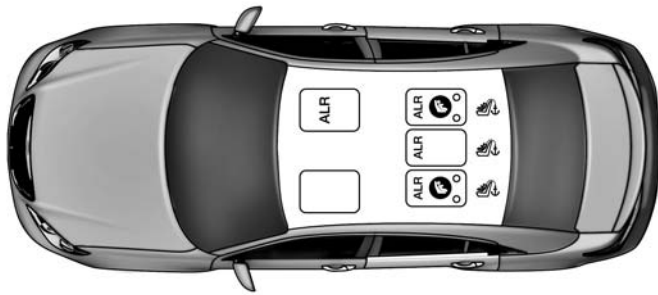


0226076774

2011–2013 Model Years

- ALR — Switchable Automatic Locking Retractor
- Lower Anchorage Symbol (2 Anchorages Per Seating Position)
- Top Tether Anchorage Symbol

Locating The LATCH Lower Anchorages In This Vehicle

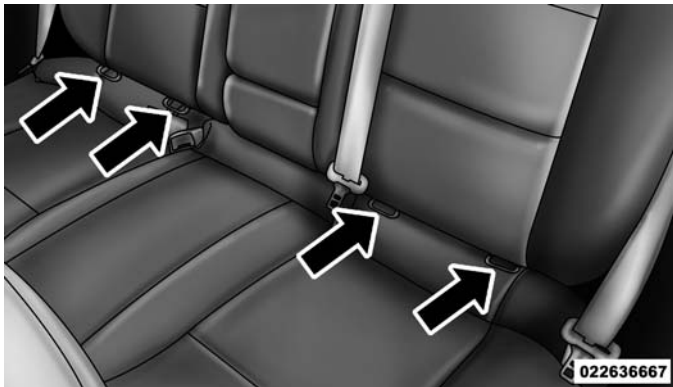


022636667

Rear Seat LATCH Lower Anchorages (2011–2013 Model Years)

Locating The Tether Anchorages In This Vehicle




There are tether strap anchorages behind each rear seating position located in the panel between the rear seatback and the rear window. They are found under a plastic cover with the tether anchorage symbol on it.

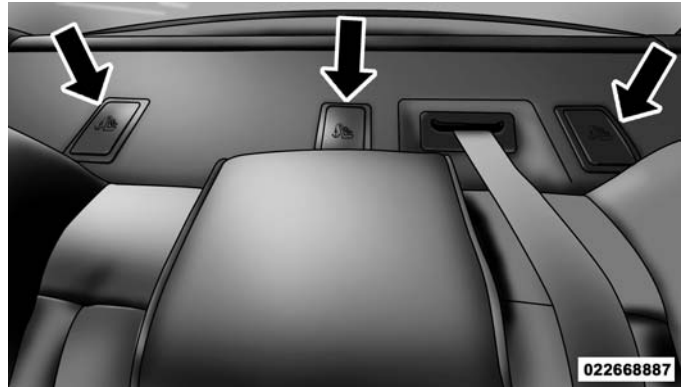

022668887

Tether Strap Anchorages

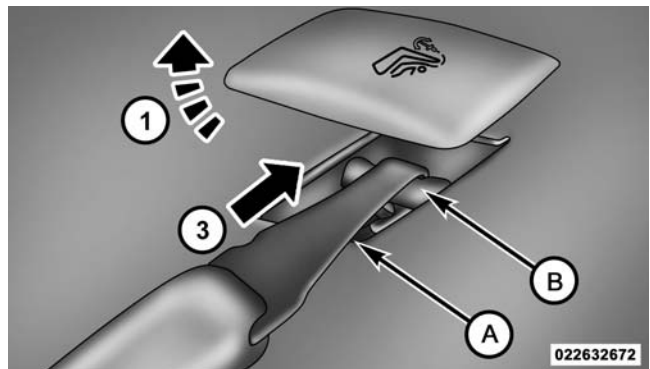

022632672

Tether Anchorages

- 1 — Cover
- 3 — Attaching Strap
- A — Tether Strap Hook
- B — Tether Anchor

Frequently Asked Questions About LATCH

What is the weight limit (child’s weight + weight of the child restraint) for using the LATCH anchorage system to attach the child restraint?	65 lbs (29.5 kg)	Use the LATCH anchorage system until the combined weight of the child and the child restraint is 65 lbs (29.5 kg). Use the seat belt and tether anchor instead of the LATCH system once the combined weight is more than 65 lbs (29.5 kg).
Can a child seat be installed in the center position using the inner LATCH lower anchorages?	Yes	You can install child restraints with flexible lower anchors in the center position. The inner anchorages are 15.4 inches (392 mm) apart. Do not install child restraints with rigid lower anchors in the center position.
Can the LATCH anchorages and the seat belt be used together to attach a rear-facing or forward-facing child restraint?	No	Do not use the seat belt when you use the LATCH anchorage system to attach a rear-facing or forward-facing child restraint.
Can two child restraints be attached using a common lower LATCH anchorage?	No	Never “share” a LATCH anchorage with two or more child restraints.

Frequently Asked Questions About LATCH

Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	The child seat may touch the back of the front passenger seat if the child restraint manufacturer also allows contact. See your child restraint Owner's Manual for more information.
Can the head restraints be removed?	No	

Center Seat LATCH

Do not install child restraints with rigid lower attachments in the center seating position. Only install this type of child restraint in the outboard seating positions. Child restraints with flexible, webbing mounted lower attachments can be installed in any rear seating position.


WARNING!

Never use the same lower anchorage to attach more than one child restraint. If you are installing LATCH-compatible child restraints next to each other, you must use the seat belt for the center position. You can then use either the LATCH anchors or the vehicle's seat belt for installing child seats in the outboard positions. Please refer to "Installing The LATCH-Compatible Child Restraint System" for typical installation instructions.

Connecting The Top Tether Strap (With Either Lower Anchors Or Vehicle Seat Belt)

When installing a forward-facing child restraint, always secure the top tether strap, up to the tether anchor weight limit, whether the child restraint is installed with the lower anchors or the vehicle seat belt.

1. Look behind the seating position where you plan to install the child restraint to find the tether anchorage. You may need to move the seat forward to provide better access to the tether anchorage. If there is no top tether anchorage for that seating position, move the child restraint to another position in the vehicle if one is available.
2. Rotate or lift the cover to access the anchor directly behind the seat where you are placing the child restraint.
3. Route the tether strap to provide the most direct path for the strap between the anchor and the child seat. If your vehicle is equipped with adjustable rear head restraints, raise the head restraint, and where possible, route the tether strap under the head restraint and between the two posts. If not possible, lower the head restraint and pass the tether strap around the outboard side of the head restraint.

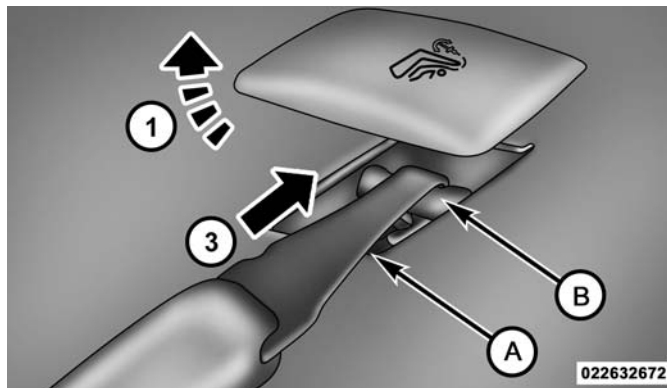

Tether Anchorages

- 1 — Cover
- 3 — Attaching Strap
- A — Tether Strap Hook
- B — Tether Anchor


4. Attach the tether strap hook of the child restraint to the top tether anchorage as shown in the diagram.
5. Remove slack in the tether strap according to the child restraint manufacturer's instructions.

WARNING!

- An incorrectly anchored tether strap could lead to increased head motion and possible injury to the child. Use only the anchorage position directly behind the child seat to secure a child restraint top tether strap.
- If your vehicle is equipped with a split rear seat, make sure the tether strap does not slip into the opening between the seatbacks as you remove slack in the strap.



Seat Belt Systems In Your Vehicle

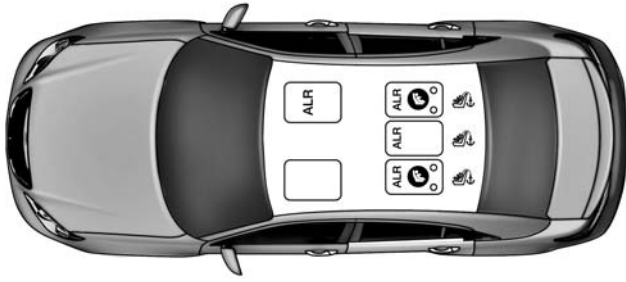Lap/Shoulder Belt Systems For Installing Child Restraints In This Vehicle



0226076774

2011–2013 Model Years


- ALR — Switchable Automatic Locking Retractor
-  Lower Anchorage Symbol (2 Anchorages Per Seating Position)
-  Top Tether Anchorage Symbol

Frequently Asked Questions About Seat Belts And Car Seats		
What is the weight limit (child’s weight + weight of the child restraint) for using the Tether Anchor with the seat belt to attach a forward facing child restraint?	Weight limit of the Child Restraint	Always use the tether anchor when using the seat belt to install a forward facing child restraint, up to the recommended weight limit of the child restraint.
Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	Contact between the front passenger seat and the child restraint is allowed, if the child restraint manufacturer also allows contact.
Can the head restraints be removed?	No	
Can the buckle stalk be twisted to tighten the seat belt against the belt path of the child restraint?	No	Do not twist the buckle stalk in a seating position with an ALR retractor.

CHRYSLER 300, 2005–2013


LATCH And Tethers In Your Vehicle

LATCH Positions For Installing Child Restraints In This Vehicle

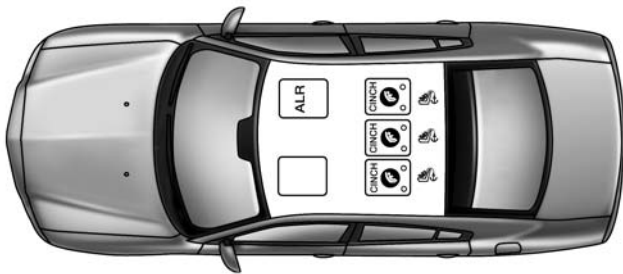

0226077513

2005–2010 Model Years

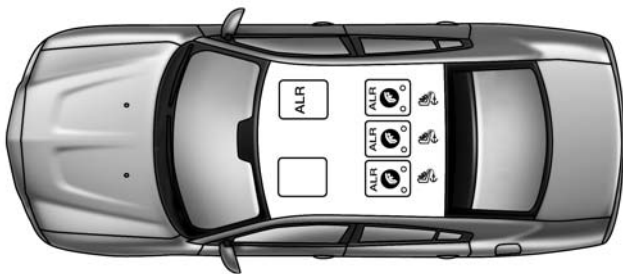


0226077507

2011–2013 Model Years

- ALR — Switchable Automatic Locking Retractor
- CINCH — Cinching Latch Plate
- Lower Anchorage Symbol (2 Anchorages Per Seating Position)
- Top Tether Anchorage Symbol

Locating The LATCH Lower Anchorages In This Vehicle

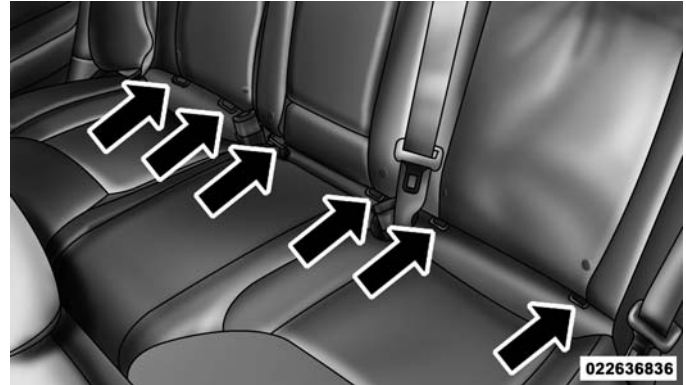


Rear Seat LATCH Lower Anchorages (2005–2013 Model Years)

Locating The Tether Anchorages In This Vehicle



There are tether strap anchorages behind each rear seating position located in the panel between the rear seatback and the rear window. They are found under a plastic cover with the tether anchorage symbol on it.

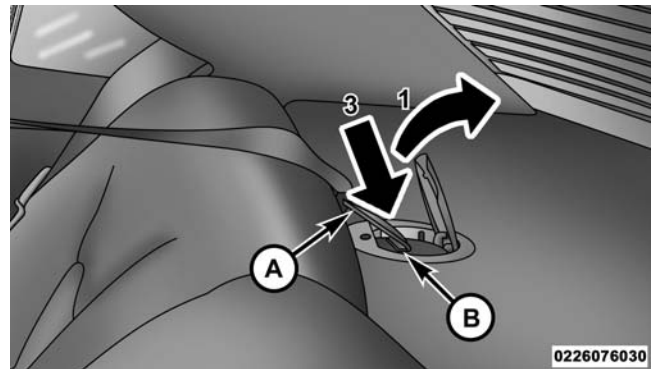

Tether Strap Anchorages (2005–2013 Model Years)

- 1 — Cover
- 3 — Attaching Strap
- A — Tether Strap Hook
- B — Tether Anchor

Frequently Asked Questions About LATCH

What is the weight limit (child’s weight + weight of the child restraint) for using the LATCH anchorage system to attach the child restraint?	65 lbs (29.5 kg)	Use the LATCH anchorage system until the combined weight of the child and the child restraint is 65 lbs (29.5 kg). Use the seat belt and tether anchor instead of the LATCH system once the combined weight is more than 65 lbs (29.5 kg).
Can the LATCH anchorages and the seat belt be used together to attach a rear-facing or forward-facing child restraint?	No	Do not use the seat belt when you use the LATCH anchorage system to attach a rear-facing or forward-facing child restraint.
Can two child restraints be attached using a common lower LATCH anchorage?	No	Never “share” a LATCH anchorage with two or more child restraints.

Frequently Asked Questions About LATCH		
2005–2006 Model Years		
Can the rear-facing child restraint touch the back of the front passenger seat?	No	Contact between the front passenger seat and a child restraint can affect the passenger airbag suppression system. See your Owner’s Manual for more information.
Can the head restraints be removed?	No	
2007–2010 Model Years		
Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	The child seat may touch the back of the front passenger seat if the child restraint manufacturer also allows contact. See your child restraint Owner’s Manual for more information.
Can the head restraints be removed?	No	
2011–2013 Model Years		
Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	The child seat may touch the back of the front passenger seat if the child restraint manufacturer also allows contact. See your child restraint Owner’s Manual for more information.
Can the head restraints be removed?	Yes	Center Only.

Center Seat LATCH


If a child restraint installed in the center position blocks the seat belt webbing or buckle for the outboard position, do not use that outboard position. If a child seat in the center position blocks the outboard LATCH anchors or seat belt, do not install a child seat in that outboard position.

WARNING!
<p>Never use the same lower anchorage to attach more than one child restraint. Please refer to “Installing The LATCH-Compatible Child Restraint System” for typical installation instructions.</p>

Connecting The Top Tether Strap (With Either Lower Anchors Or Vehicle Seat Belt)

When installing a forward-facing child restraint, always secure the top tether strap, up to the tether anchor weight limit, whether the child restraint is installed with the lower anchors or the vehicle seat belt.

1. Look behind the seating position where you plan to install the child restraint to find the tether anchorage. You may need to move the seat forward to provide better access to the tether anchorage. If there is no top tether anchorage for that seating position, move the child restraint to another position in the vehicle if one is available.
2. Rotate or lift the cover to access the anchor directly behind the seat where you are placing the child restraint.
3. Route the tether strap to provide the most direct path for the strap between the anchor and the child seat. If your vehicle is equipped with adjustable rear head restraints, raise the head restraint, and where possible, route the tether strap under the head restraint and between the two posts. If not possible, lower the head restraint and pass the tether strap around the outboard side of the head restraint.

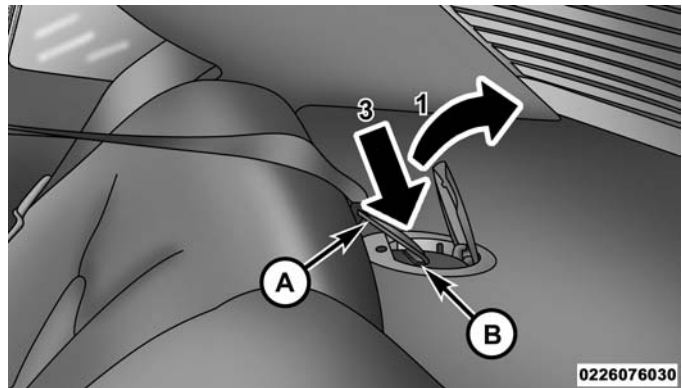

Tether Strap Anchorages

- | | |
|---------------------|-----------------------|
| 1 — Cover | A — Tether Strap Hook |
| 3 — Attaching Strap | B — Tether Anchor |

4. Attach the tether strap hook of the child restraint to the top tether anchorage as shown in the diagram.
5. Remove slack in the tether strap according to the child restraint manufacturer’s instructions.

WARNING!
<ul style="list-style-type: none"> • An incorrectly anchored tether strap could lead to increased head motion and possible injury to the child. Use only the anchorage position directly behind the child seat to secure a child restraint top tether strap. • If your vehicle is equipped with a split rear seat, make sure the tether strap does not slip into the opening between the seatbacks as you remove slack in the strap.


Center Tether Attachment (2011-2013 Model Year):

1. Lower the adjustable center head restraint to the full down position.
2. Route the tether strap over the seatback and head restraint.

3. Attach the tether strap hook of the child restraint to the center tether anchorage located in the panel between the rear seatback and the rear window.
4. Remove slack in the tether strap according to the child restraint manufacturer’s instructions.

Seat Belt Systems In Your Vehicle


Lap/Shoulder Belt Systems For Installing Child Restraints In This Vehicle

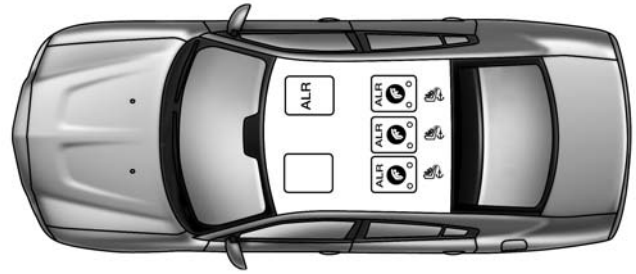

0226077507

2011–2013 Model Years

- ALR — Switchable Automatic Locking Retractor
- CINCH — Cinching Latch Plate
- Lower Anchorage Symbol (2 Anchorages Per Seating Position)
- Top Tether Anchorage Symbol

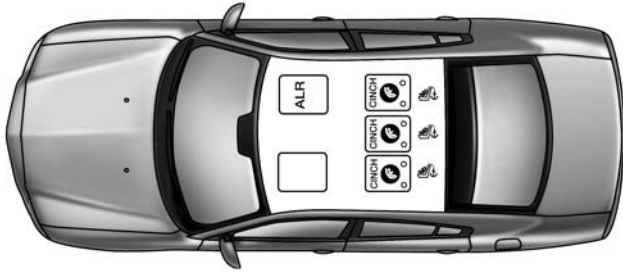

0226077513


2005–2010 Model Years

Frequently Asked Questions About Seat Belts And Car Seats		
What is the weight limit (child’s weight + weight of the child restraint) for using the Tether Anchor with the seat belt to attach a forward facing child restraint?	Weight limit of the Child Restraint	Always use the tether anchor when using the seat belt to install a forward facing child restraint, up to the recommended weight limit of the child restraint.
2005–2006 Model Years		
Can the rear-facing child restraint touch the back of the front passenger seat?	No	Contact between the front passenger seat and a child restraint can affect the passenger airbag suppression system. See your Owner’s Manual for more information.
Can the head restraints be removed?	No	
Can the buckle stalk be twisted to tighten the seat belt against the belt path of the child restraint?	Yes	In positions with cinching latch plates (CINCH), the buckle stalk may be twisted up to 3 full turns. Do not twist the buckle stalk in a seating position with an ALR retractor.
2007–2010 Model Years		
Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	Contact between the front passenger seat and the child restraint is allowed, if the child restraint manufacturer also allows contact.
Can the head restraints be removed?	No	
Can the buckle stalk be twisted to tighten the seat belt against the belt path of the child restraint?	Yes	In positions with cinching latch plates (CINCH), the buckle stalk may be twisted up to 3 full turns. Do not twist the buckle stalk in a seating position with an ALR retractor.
2011–2013 Model Years		
Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	Contact between the front passenger seat and the child restraint is allowed, if the child restraint manufacturer also allows contact.
Can the head restraints be removed?	Yes	Center only.
Can the buckle stalk be twisted to tighten the seat belt against the belt path of the child restraint?	No	Do not twist the buckle stalk in a seating position with an ALR retractor.

CHRYSLER 300M, 2000–2004


LATCH And Tethers In Your Vehicle

LATCH Positions For Installing Child Restraints In This Vehicle

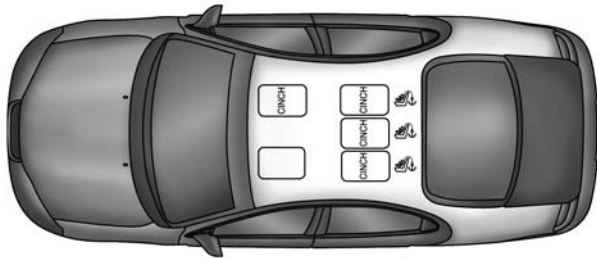


0226077505

2000–2001 Model Years (Front Bucket Seats)

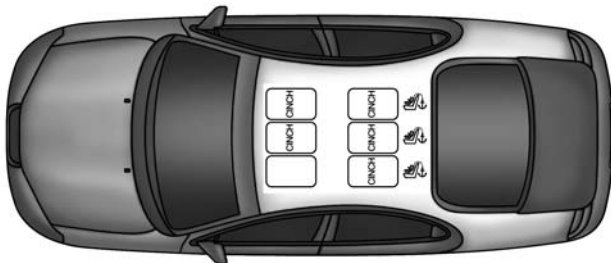


0226079258

2000–2001 Model Years (Front Bench Seat)

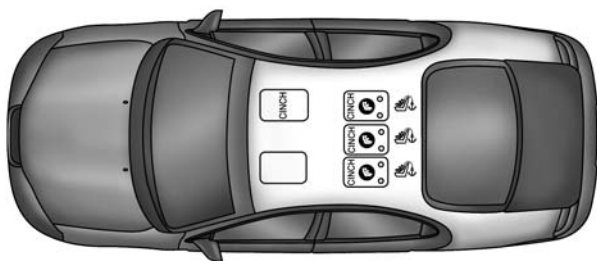

0226077506

2002–2004 Model Years (Front Bucket Seats)

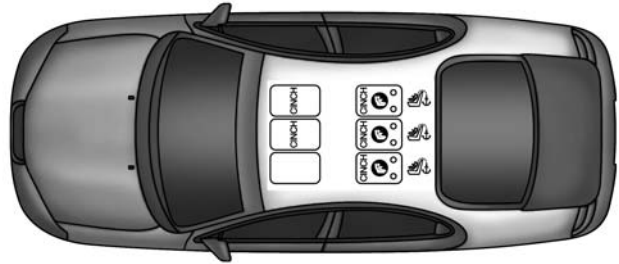

0226079259


2002–2004 Model Years (Front Bench Seat)

- CINCH — Cinching Latch Plate
- Lower Anchorage Symbol (2 Anchorages Per Seating Position)
- Top Tether Anchorage Symbol

Locating The LATCH Lower Anchorages In This Vehicle



Rear Seat Has No LATCH Lower Anchorages (2000–2001 Model Years)

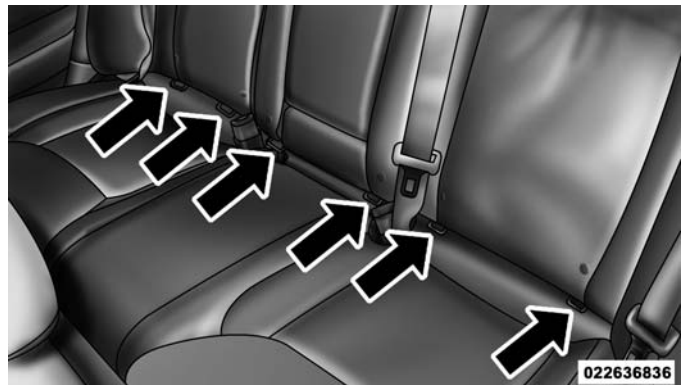


Rear Seat LATCH Lower Anchorages (2002–2004 Model Years)

Locating The Tether Anchorages In This Vehicle



There are tether strap anchorages behind each rear seating position located in the panel between the rear seatback and the rear window. They are found under a plastic cover with the tether anchor symbol on it.

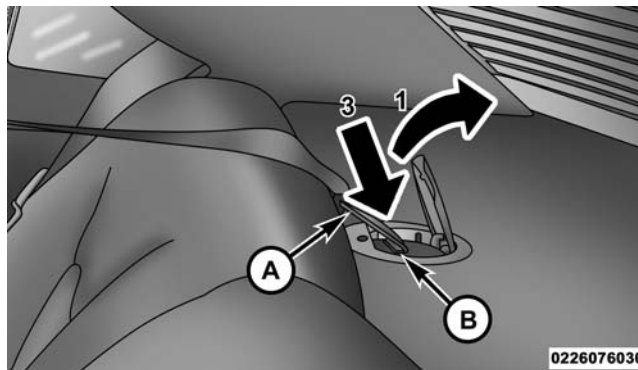

Tether Strap Anchorages (2000–2004 Model Years)

- 1 — Cover
- 3 — Attaching Strap
- A — Tether Strap Hook
- B — Tether Anchor

Frequently Asked Questions About LATCH		
2000–2001 Model Years (No Lower Anchorages)		
2002–2004 Model Years		
What is the weight limit (child’s weight + weight of the child restraint) for using the LATCH anchorage system to attach the child restraint?	65 lbs (29.5 kg)	Use the LATCH anchorage system until the combined weight of the child and the child restraint is 65 lbs (29.5 kg). Use the seat belt alone instead of the LATCH anchorage system once the combined weight is more than 65 lbs (29.5 kg).
Can the LATCH anchorages and the seat belt be used together to attach a rear-facing or forward-facing child restraint?	No	Do not use the seat belt when you use the LATCH anchorage system to attach a rear-facing or forward-facing child restraint.
Can two child restraints be attached using a common lower LATCH anchorage?	No	Never “share” a LATCH anchorage with two or more child restraints.
Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	The child seat may touch the back of the front passenger seat if the child restraint manufacturer also allows contact. See your child restraint Owner’s Manual for more information.
Can the head restraints be removed?	No	

Center Seat LATCH

2002–2004 Model Years

If a child restraint installed in the center position blocks the seat belt webbing or buckle for the outboard position, do not use that outboard position. If a child seat in the center position blocks the outboard LATCH anchors or seat belt, do not install a child seat in that outboard position.

WARNING!


Never use the same lower anchorage to attach more than one child restraint. Please refer to “Installing The LATCH-Compatible Child Restraint System” for typical installation instructions.

Connecting The Top Tether Strap (With Either Lower Anchors Or Vehicle Seat Belt)

When installing a forward-facing child restraint, always secure the top tether strap, up to the tether anchor weight limit, whether the child restraint is installed with the lower anchors or the vehicle seat belt.

1. Look behind the seating position where you plan to install the child restraint to find the tether anchorage. You may need to move the seat forward to provide better access to the tether anchorage. If there is no top tether anchorage for that seating position, move the child restraint to another position in the vehicle if one is available.
2. Rotate or lift the cover to access the anchor directly behind the seat where you are placing the child restraint.

3. Route the tether strap to provide the most direct path for the strap between the anchor and the child seat. If your vehicle is equipped with adjustable rear head restraints, raise the head restraint, and where possible, route the tether strap under the head restraint and between the two posts. If not possible, lower the head restraint and pass the tether strap around the outboard side of the head restraint.

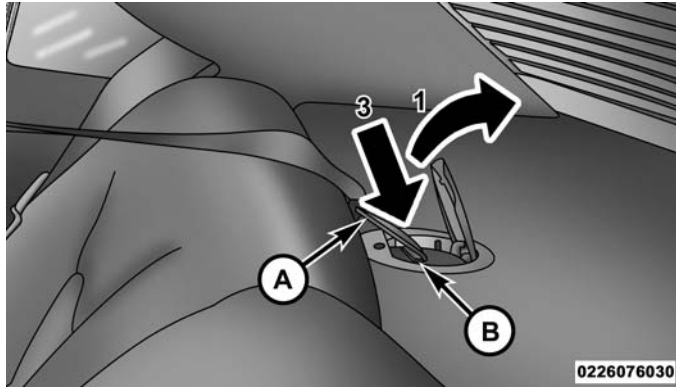

Tether Strap Anchorages

- | | |
|---------------------|-----------------------|
| 1 — Cover | A — Tether Strap Hook |
| 3 — Attaching Strap | B — Tether Anchor |


- Attach the tether strap hook of the child restraint to the top tether anchorage as shown in the diagram.
- Remove slack in the tether strap according to the child restraint manufacturer's instructions.

WARNING!

- An incorrectly anchored tether strap could lead to increased head motion and possible injury to the child. Use only the anchorage position directly behind the child seat to secure a child restraint top tether strap.
- If your vehicle is equipped with a split rear seat, make sure the tether strap does not slip into the opening between the seatbacks as you remove slack in the strap.


Seat Belt Systems In Your Vehicle

Lap/Shoulder Belt Systems For Installing Child Restraints In This Vehicle

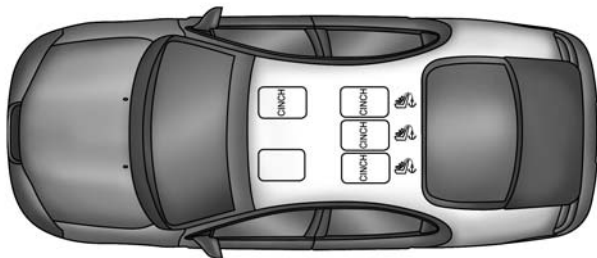


0226077505

2000–2001 Model Years (Front Bucket Seats)

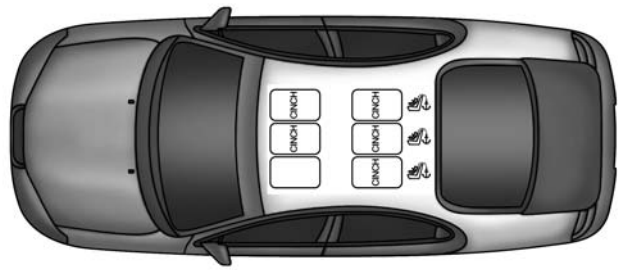


0226079258

2000–2001 Model Years (Front Bench Seat)

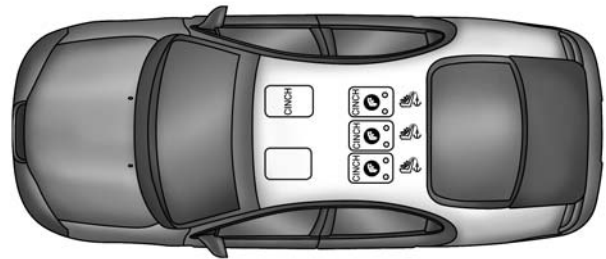

0226077506

2002–2004 Model Years (Front Bucket Seats)

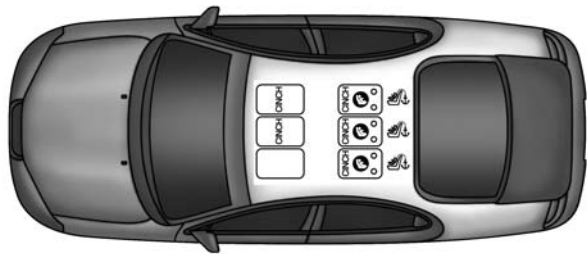

0226079259

2002–2004 Model Years (Front Bench Seat)

- CINCH — Cinching Latch Plate
- Lower Anchorage Symbol (2 Anchorages Per Seating Position)
- Top Tether Anchorage Symbol


Frequently Asked Questions About Seat Belts And Car Seats

<p>What is the weight limit (child’s weight + weight of the child restraint) for using the Tether Anchor with the seat belt to attach a forward facing child restraint?</p>	<p>65 lbs (29.5 kg)</p>	<p>The Tether Anchor can be used with the seat belt until the combined weight of the child and the child restraint is 65 lbs (29.5 kg). Use the seat belt without the Tether Anchor once the combined weight is more than 65 lbs (29.5 kg).</p>
<p>Can the rear-facing child restraint touch the back of the front passenger seat?</p>	<p>Yes</p>	<p>Contact between the front passenger seat and the child restraint is allowed, if the child restraint manufacturer also allows contact.</p>
<p>Can the head restraints be removed?</p>	<p>No</p>	
<p>Can the buckle stalk be twisted to tighten the seat belt against the belt path of the child restraint?</p>	<p>Yes</p>	<p>In positions with cinching latch plates (CINCH), the buckle stalk may be twisted up to 3 full turns.</p>

CHRYSLER CONCORDE, 2000–2004


LATCH And Tethers In Your Vehicle

LATCH Positions For Installing Child Restraints In This Vehicle

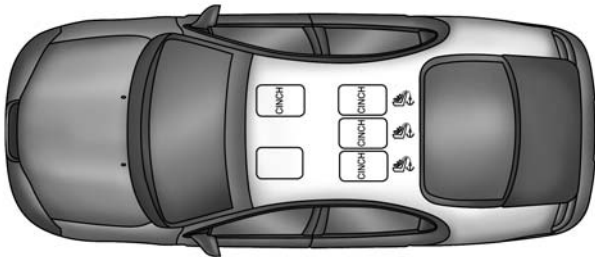


0226077505

2000–2001 Model Years (Front Bucket Seats)

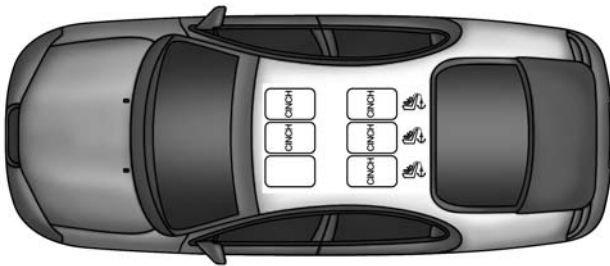


0226079258

2000–2001 Model Years (Front Bench Seat)

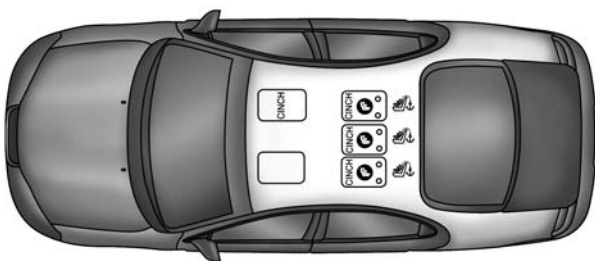

0226077506

2002–2004 Model Years (Front Bucket Seats)

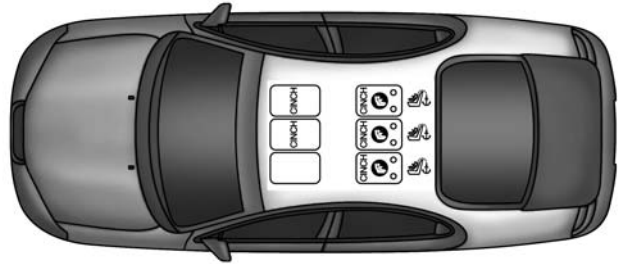

0226079259

2002–2004 Model Years (Front Bench Seat)


- CINCH — Cinching Latch Plate
- Lower Anchorage Symbol (2 Anchorages Per Seating Position)
- Top Tether Anchorage Symbol

Locating The LATCH Lower Anchorages In This Vehicle



0226078115

Rear Seat Has No LATCH Lower Anchorages (2000–2001 Model Years)

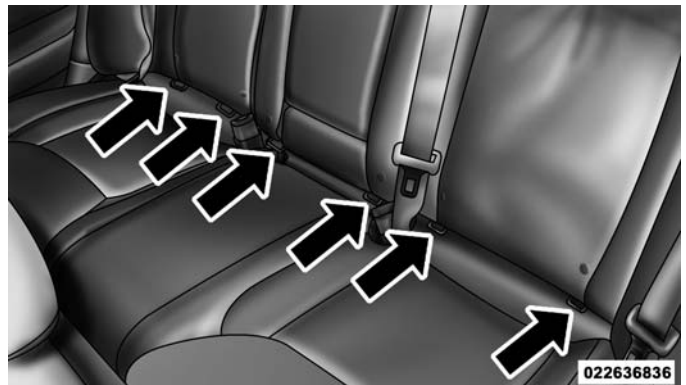


022636836

Rear Seat LATCH Lower Anchorages (2002–2004 Model Years)

Locating The Tether Anchorages In This Vehicle



There are tether strap anchorages behind each rear seating position located in the panel between the rear seatback and the rear window. They are found under a plastic cover with the tether anchorage symbol on it.

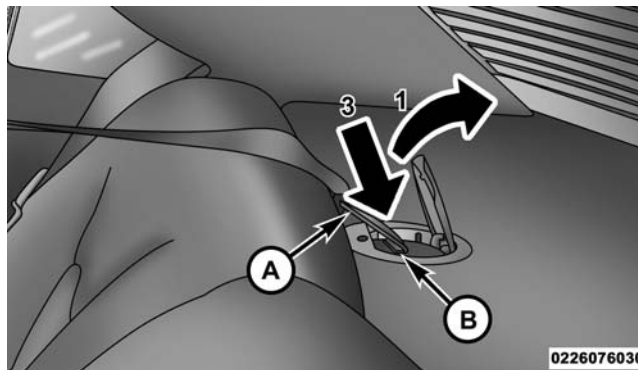

Tether Strap Anchorages (2000–2004 Model Years)

- 1 — Cover
- 3 — Attaching Strap
- A — Tether Strap Hook
- B — Tether Anchor

Frequently Asked Questions About LATCH		
2000–2001 Model Years (No Lower Anchorages)		
2002–2004 Model Years		
What is the weight limit (child’s weight + weight of the child restraint) for using the LATCH anchorage system to attach the child restraint?	65 lbs (29.5 kg)	Use the LATCH anchorage system until the combined weight of the child and the child restraint is 65 lbs (29.5 kg). Use the seat belt alone instead of the LATCH anchorage system once the combined weight is more than 65 lbs (29.5 kg).
Can the LATCH anchorages and the seat belt be used together to attach a rear-facing or forward-facing child restraint?	No	Do not use the seat belt when you use the LATCH anchorage system to attach a rear-facing or forward-facing child restraint.
Can two child restraints be attached using a common lower LATCH anchorage?	No	Never “share” a LATCH anchorage with two or more child restraints.
Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	The child seat may touch the back of the front passenger seat if the child restraint manufacturer also allows contact. See your child restraint Owner’s Manual for more information.
Can the head restraints be removed?	No	

Center Seat LATCH

2002–2004 Model Years

If a child restraint installed in the center position blocks the seat belt webbing or buckle for the outboard position, do not use that outboard position. If a child seat in the center position blocks the outboard LATCH anchors or seat belt, do not install a child seat in that outboard position.

WARNING!


Never use the same lower anchorage to attach more than one child restraint. Please refer to “Installing The LATCH-Compatible Child Restraint System” for typical installation instructions.

Connecting The Top Tether Strap (With Either Lower Anchors Or Vehicle Seat Belt)

When installing a forward-facing child restraint, always secure the top tether strap, up to the tether anchor weight limit, whether the child restraint is installed with the lower anchors or the vehicle seat belt.

1. Look behind the seating position where you plan to install the child restraint to find the tether anchorage. You may need to move the seat forward to provide better access to the tether anchorage. If there is no top tether anchorage for that seating position, move the child restraint to another position in the vehicle if one is available.
2. Rotate or lift the cover to access the anchor directly behind the seat where you are placing the child restraint.

3. Route the tether strap to provide the most direct path for the strap between the anchor and the child seat. If your vehicle is equipped with adjustable rear head restraints, raise the head restraint, and where possible, route the tether strap under the head restraint and between the two posts. If not possible, lower the head restraint and pass the tether strap around the outboard side of the head restraint.

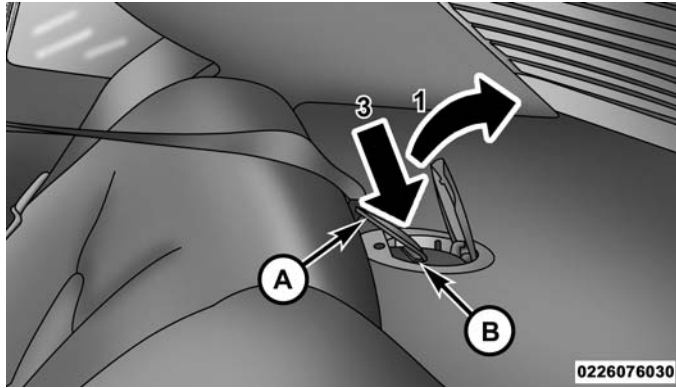

Tether Strap Anchorages

- | | |
|---------------------|-----------------------|
| 1 — Cover | A — Tether Strap Hook |
| 3 — Attaching Strap | B — Tether Anchor |


- Attach the tether strap hook of the child restraint to the top tether anchorage as shown in the diagram.
- Remove slack in the tether strap according to the child restraint manufacturer's instructions.

WARNING!


- An incorrectly anchored tether strap could lead to increased head motion and possible injury to the child. Use only the anchorage position directly behind the child seat to secure a child restraint top tether strap.
- If your vehicle is equipped with a split rear seat, make sure the tether strap does not slip into the opening between the seatbacks as you remove slack in the strap.

Seat Belt Systems In Your Vehicle


Lap/Shoulder Belt Systems For Installing Child Restraints In This Vehicle

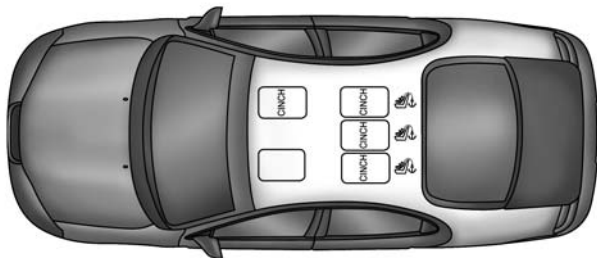


2000–2001 Model Years (Front Bucket Seats)

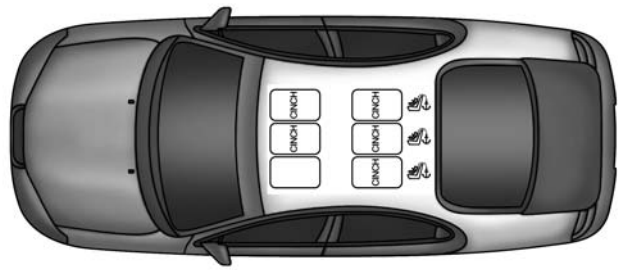

2000–2001 Model Years (Front Bench Seat)

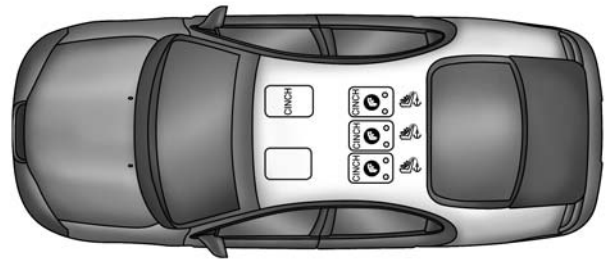

2002–2004 Model Years (Front Bucket Seats)

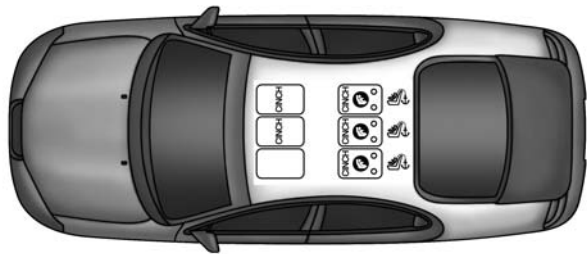

2002–2004 Model Years (Front Bench Seat)

- CINCH — Cinching Latch Plate
- Lower Anchorage Symbol (2 Anchorages Per Seating Position)
- Top Tether Anchorage Symbol


Frequently Asked Questions About Seat Belts And Car Seats

What is the weight limit (child’s weight + weight of the child restraint) for using the Tether Anchor with the seat belt to attach a forward facing child restraint?	65 lbs (29.5 kg)	The Tether Anchor can be used with the seat belt until the combined weight of the child and the child restraint is 65 lbs (29.5 kg). Use the seat belt without the Tether Anchor once the combined weight is more than 65 lbs (29.5 kg).
Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	Contact between the front passenger seat and the child restraint is allowed, if the child restraint manufacturer also allows contact.
Can the head restraints be removed?	No	
Can the buckle stalk be twisted to tighten the seat belt against the belt path of the child restraint?	Yes	In positions with cinching latch plates (CINCH), the buckle stalk may be twisted up to 3 full turns.

CHRYSLER CROSSFIRE, 2004–2008

LATCH And Tethers In Your Vehicle


LATCH Positions For Installing Child Restraints In This Vehicle

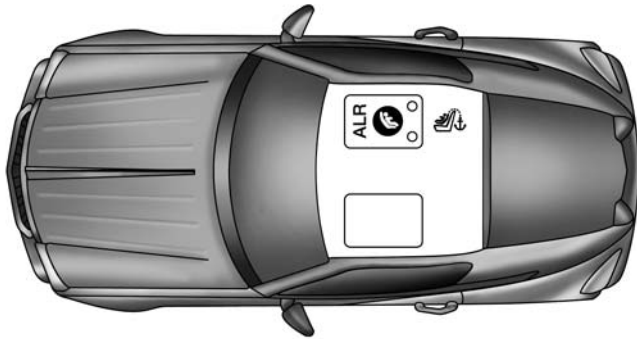

0226076819

- ALR — Switchable Automatic Locking Retractor
- Lower Anchorage Symbol (2 Anchorages Per Seating Position)
- Top Tether Anchorage Symbol

Locating The LATCH Lower Anchorages In This Vehicle

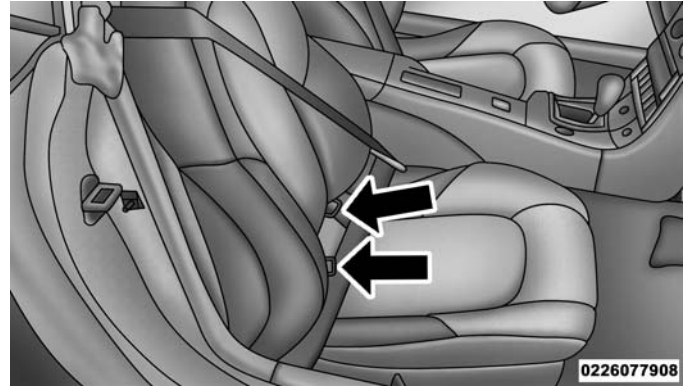


Passenger Seat LATCH Lower Anchorages (2004–2008 Model Years)

Locating The Tether Anchorage In This Vehicle



There is a tether strap anchorage behind the passenger seat located on the back of the seat near the floor.

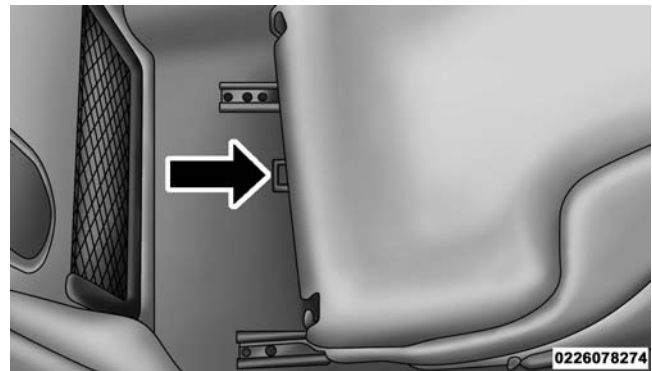

Tether Strap Anchorage (2004–2008 Model Years)


Frequently Asked Questions About LATCH

What is the weight limit (child’s weight + weight of the child restraint) for using the LATCH anchorage system to attach the child restraint?	65 lbs (29.5 kg)	Use the LATCH anchorage system until the combined weight of the child and the child restraint is 65 lbs (29.5 kg). Use the seat belt alone instead of the LATCH anchorage system once the combined weight is more than 65 lbs (29.5 kg).
Can the LATCH anchorages and the seat belt be used together to attach a rear-facing or forward-facing child restraint?	No	Do not use the seat belt when you use the LATCH anchorage system to attach a rear-facing or forward-facing child restraint.
Can two child restraints be attached using a common lower LATCH anchorage?	No	Never “share” a LATCH anchorage with two or more child restraints. If the center position does not have dedicated LATCH lower anchorages, use the seat belt to install a child seat in the center position next to a child seat using the LATCH anchorages in an outboard position.
Can the head restraints be removed?	No	

Connecting The Top Tether Strap (With Either Lower Anchors Or Vehicle Seat Belt)

When installing a forward-facing child restraint, always secure the top tether strap, up to the tether anchor weight limit, whether the child restraint is installed with the lower anchors or the vehicle seat belt.

1. Move the seatback fully forward.

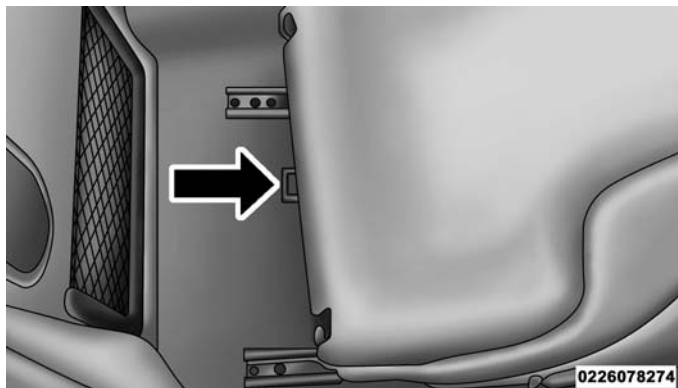

Tether Strap Anchorages (2004–2008 Model Years)


2. Pass the child restraint tether hook over the top of the seat, through the strap near the top of the seat back, and attach it to the anchor bar behind the passenger seat, below the seatback.
3. After securing the tether hook to the bar, recline the seatback fully rearward and move the seat to its most rearward position.
4. Install the child restraint and return the seatback to an upright position.
5. Remove slack from the tether strap according to the child restraint manufacturer’s directions.

WARNING!

An incorrectly anchored tether strap could lead to increased head motion and possible injury to the child. Use only the anchorage position directly behind the child seat to secure a child restraint top tether strap.

Seat Belt Systems In Your Vehicle

Lap/Shoulder Belt Systems For Installing Child Restraints In This Vehicle

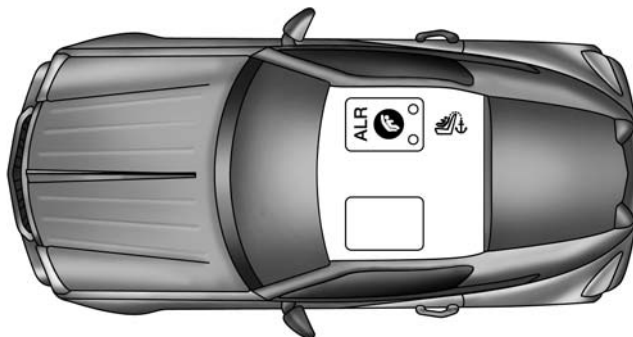

0226076819

2004–2008 Model Years

- ALR — Switchable Automatic Locking Retractor
- Lower Anchorage Symbol (2 Anchorages Per Seating Position)
- Top Tether Anchorage Symbol


Frequently Asked Questions About Seat Belts And Car Seats

What is the weight limit (child’s weight + weight of the child restraint) for using the Tether Anchor with the seat belt to attach a forward facing child restraint?	65 lbs (29.5 kg)	The Tether Anchor can be used with the seat belt until the combined weight of the child and the child restraint is 65 lbs (29.5 kg). Use the seat belt without the Tether Anchor once the combined weight is more than 65 lbs (29.5 kg).
Can the head restraints be removed?	No	
Can the buckle stalk be twisted to tighten the seat belt against the belt path of the child restraint?	No	Do not twist the buckle stalk in a seating position with an ALR retractor.

CHRYSLER LHS, 2000–2001


LATCH And Tethers In Your Vehicle

LATCH Positions For Installing Child Restraints In This Vehicle

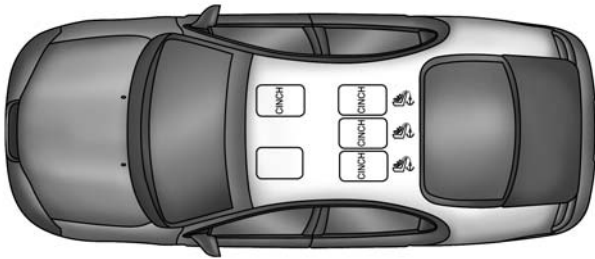


0226077505

2000–2001 Model Years (Front Bucket Seats)

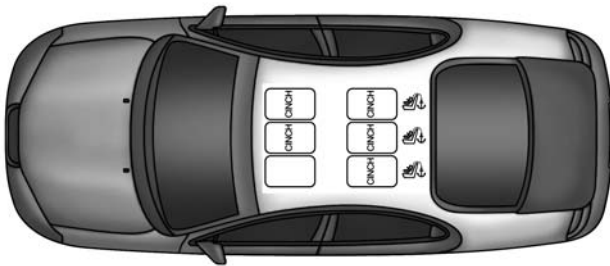

0226079258

2000–2001 Model Years (Front Bench Seat)

- CINCH — Cinching Latch Plate
-  Top Tether Anchorage Symbol

Locating The LATCH Lower Anchorages In This Vehicle




0226078115

Rear Seat Has No LATCH Lower Anchorages (2000–2001 Model Years)

Locating The Tether Anchorages In This Vehicle



There are tether strap anchorages behind each rear seating position located in the panel between the rear seatback and the rear window. They are found under a plastic cover with the tether anchorage symbol on it.

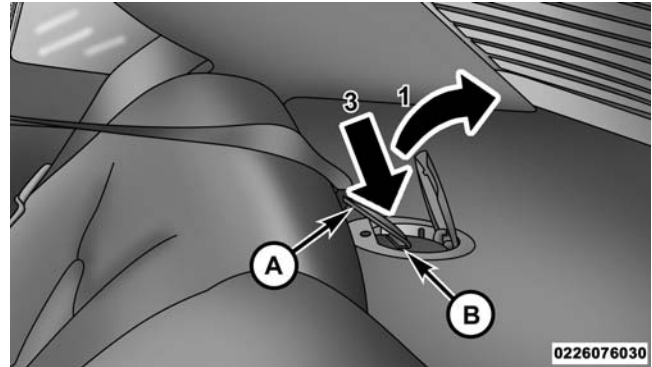

0226076030


Tether Strap Anchorages (2000–2001 Model Years)

- | | |
|---------------------|-----------------------|
| 1 — Cover | A — Tether Strap Hook |
| 3 — Attaching Strap | B — Tether Anchor |

Connecting The Top Tether Strap (With The Vehicle Seat Belt)

When installing a forward-facing child restraint, always secure the top tether strap, up to the tether anchor weight limit.

1. Look behind the seating position where you plan to install the child restraint to find the tether anchorage. You may need to move the seat forward to provide better access to the tether anchorage. If there is no top tether anchorage for that seating position, move the child restraint to another position in the vehicle if one is available.
2. Rotate or lift the cover to access the anchor directly behind the seat where you are placing the child restraint.
3. Route the tether strap to provide the most direct path for the strap between the anchor and the child seat. If your vehicle is equipped with adjustable rear head restraints, raise the head restraint, and where possible, route the tether strap under the head restraint and between the two posts. If not possible, lower the head restraint and pass the tether strap around the outboard side of the head restraint.

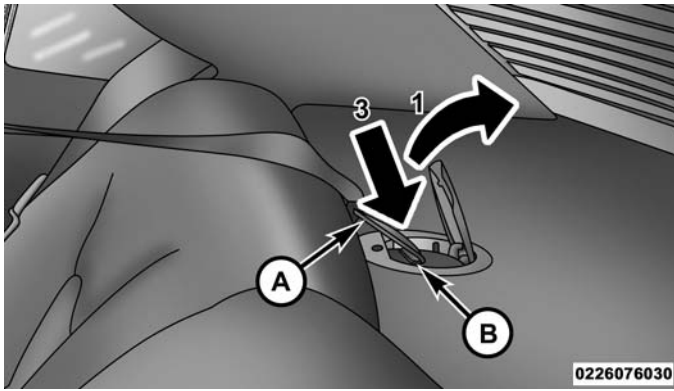


Tether Strap Anchorages

- 1 — Cover
- 3 — Attaching Strap
- A — Tether Strap Hook
- B — Tether Anchor

Seat Belt Systems In Your Vehicle

Lap/Shoulder Belt Systems For Installing Child Restraints In This Vehicle

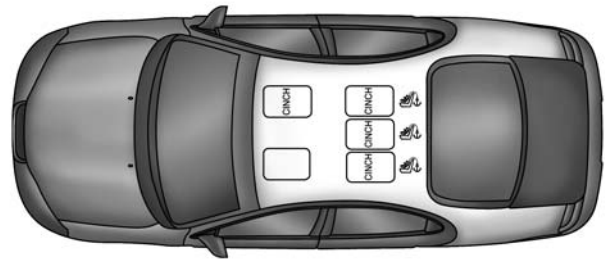


0226077505

2000–2001 Model Years (Front Bucket Seats)

4. Attach the tether strap hook of the child restraint to the top tether anchorage as shown in the diagram.
5. Remove slack in the tether strap according to the child restraint manufacturer’s instructions.

WARNING!
<ul style="list-style-type: none"> An incorrectly anchored tether strap could lead to increased head motion and possible injury to the child. Use only the anchorage position directly behind the child seat to secure a child restraint top tether strap. If your vehicle is equipped with a split rear seat, make sure the tether strap does not slip into the opening between the seatbacks as you remove slack in the strap.

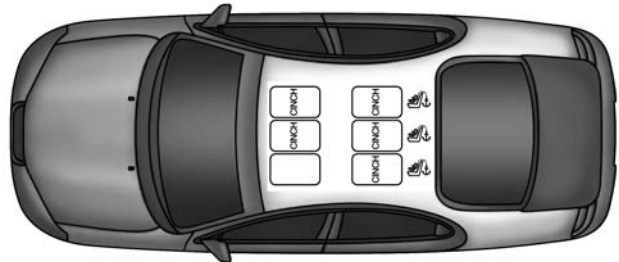

0226079258

2000–2001 Model Years (Front Bench Seat)


- CINCH — Cinching Latch Plate
- Top Tether Anchorage Symbol

Frequently Asked Questions About Seat Belts And Car Seats		
What is the weight limit (child’s weight + weight of the child restraint) for using the Tether Anchor with the seat belt to attach a forward facing child restraint?	65 lbs (29.5 kg)	The Tether Anchor can be used with the seat belt until the combined weight of the child and the child restraint is 65 lbs (29.5 kg). Use the seat belt without the Tether Anchor once the combined weight is more than 65 lbs (29.5 kg).
Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	Contact between the front passenger seat and the child restraint is allowed, if the child restraint manufacturer also allows contact.
Can the head restraints be removed?	No	
Can the buckle stalk be twisted to tighten the seat belt against the belt path of the child restraint?	Yes	In positions with cinching latch plates (CINCH), the buckle stalk may be twisted up to 3 full turns.

CHRYSLER PT CRUISER CONVERTIBLE, 2005–2008

LATCH And Tethers In Your Vehicle

LATCH Positions For Installing Child Restraints In This Vehicle

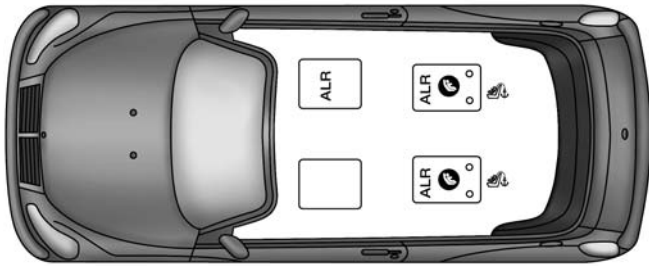


0226076808

2005–2008 Model Years

- ALR — Switchable Automatic Locking Retractor
- Lower Anchorage Symbol (2 Anchages Per Seating Position)
- Top Tether Anchorage Symbol

Locating The LATCH Lower Anchorages In This Vehicle

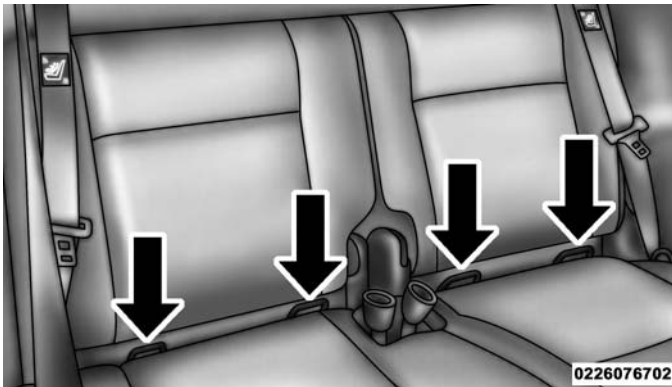


0226076702

Rear Seat LATCH Lower Anchorages (2005–2008 Model Years)

Locating The Tether Anchorages In This Vehicle



To gain access to the anchorages, locate the child tether anchorage decals on the carpet behind the rear seat head forms and use a small screwdriver to pry the carpet flap open. The carpet flap is attached in two different places.

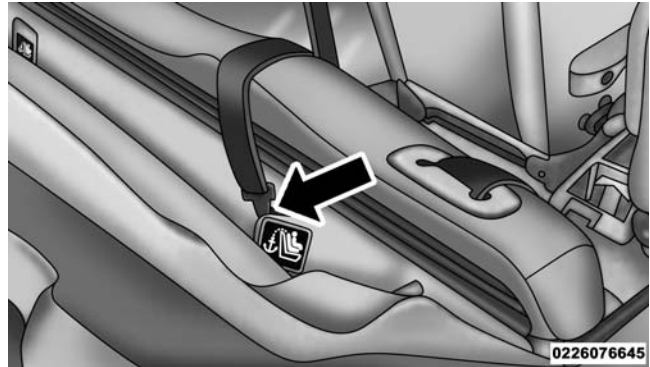

0226076645

Tether Strap Anchorages (2005–2008 Model Years)

Frequently Asked Questions About LATCH		
What is the weight limit (child’s weight + weight of the child restraint) for using the LATCH anchorage system to attach the child restraint?	65 lbs (29.5 kg)	Use the LATCH anchorage system until the combined weight of the child and the child restraint is 65 lbs (29.5 kg). Use the seat belt alone instead of the LATCH anchorage system once the combined weight is more than 65 lbs (29.5 kg).
Can the LATCH anchorages and the seat belt be used together to attach a rear-facing or forward-facing child restraint?	No	Do not use the seat belt when you use the LATCH anchorage system to attach a rear-facing or forward-facing child restraint.
Can two child restraints be attached using a common lower LATCH anchorage?	No	Never “share” a LATCH anchorage with two or more child restraints. If the center position does not have dedicated LATCH lower anchorages, use the seat belt to install a child seat in the center position next to a child seat using the LATCH anchorages in an outboard position.

Frequently Asked Questions About LATCH		
2005 Model Year		
Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	The child seat may touch the back of the front passenger seat if the child restraint manufacturer also allows contact. See your child restraint Owner's Manual for more information.
Can the head restraints be removed?	No	
2006–2008 Model Years		
Can the rear-facing child restraint touch the back of the front passenger seat?	No	Contact between the front passenger seat and a child restraint can affect the passenger airbag suppression system. See your Owner's Manual for more information.
Can the head restraints be removed?	No	

Center Seat LATCH


WARNING!

This vehicle does not have a center seating position. Do not use the center lower LATCH anchorages to install a child seat in the center of the back seat.

Connecting The Top Tether Strap (With Either Lower Anchors Or Vehicle Seat Belt)

When installing a forward-facing child restraint, always secure the top tether strap, up to the tether anchor weight limit, whether the child restraint is installed with the lower anchors or the vehicle seat belt.

1. Locate the tether anchorages, found behind the rear seat head form, in the convertible top storage area.

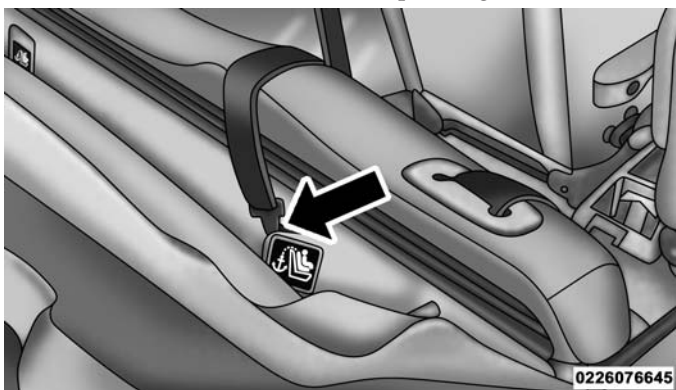

Tether Strap Anchorages (2005–2008 Model Years)


2. Find the child tether anchorage decals on the carpet behind the rear seat head forms and use a small screwdriver to pry the carpet flap open. The carpet flap is attached in two different places.
3. Route the tether strap over the center of the rear seat head form and attach it to the top tether anchorage as shown in the diagram.
4. Remove slack in the tether strap according to the child restraint manufacturer's instructions.

WARNING!

- An incorrectly anchored tether strap could lead to increased head motion and possible injury to the child. Use only the anchorage position directly behind the child seat to secure a child restraint top tether strap.
- If your vehicle is equipped with a split rear seat, make sure the tether strap does not slip into the opening between the seatbacks as you remove slack in the strap.

Seat Belt Systems In Your Vehicle

Lap/Shoulder Belt Systems For Installing Child Restraints In This Vehicle

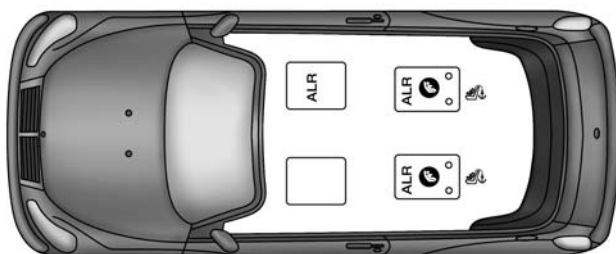

0226076808

2005–2008 Model Years

- ALR — Switchable Automatic Locking Retractor
- Lower Anchorage Symbol (2 Anchorages Per Seating Position)
- Top Tether Anchorage Symbol

Frequently Asked Questions About Seat Belts And Car Seats

2005 Model Year

What is the weight limit (child's weight + weight of the child restraint) for using the Tether Anchor with the seat belt to attach a forward facing child restraint?	65 lbs (29.5 kg)	The Tether Anchor can be used with the seat belt until the combined weight of the child and the child restraint is 65 lbs (29.5 kg). Use the seat belt without the Tether Anchor once the combined weight is more than 65 lbs (29.5 kg).
Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	Contact between the front passenger seat and the child restraint is allowed, if the child restraint manufacturer also allows contact.
Can the head restraints be removed?	No	
Can the buckle stalk be twisted to tighten the seat belt against the belt path of the child restraint?	No	Do not twist the buckle stalk in a seating position with an ALR retractor.


2006–2008 Model Years

What is the weight limit (child's weight + weight of the child restraint) for using the Tether Anchor with the seat belt to attach a forward facing child restraint?	65 lbs (29.5 kg)	The Tether Anchor can be used with the seat belt until the combined weight of the child and the child restraint is 65 lbs (29.5 kg). Use the seat belt without the Tether Anchor once the combined weight is more than 65 lbs (29.5 kg).
Can the rear-facing child restraint touch the back of the front passenger seat?	No	Contact between the front passenger seat and a child restraint can affect the passenger airbag suppression system. See your Owner's Manual for more information.
Can the head restraints be removed?	No	
Can the buckle stalk be twisted to tighten the seat belt against the belt path of the child restraint?	No	Do not twist the buckle stalk in a seating position with an ALR retractor.

CHRYSLER PT CRUISER SEDAN, 2001–2010


LATCH And Tethers In Your Vehicle

LATCH Positions For Installing Child Restraints In This Vehicle

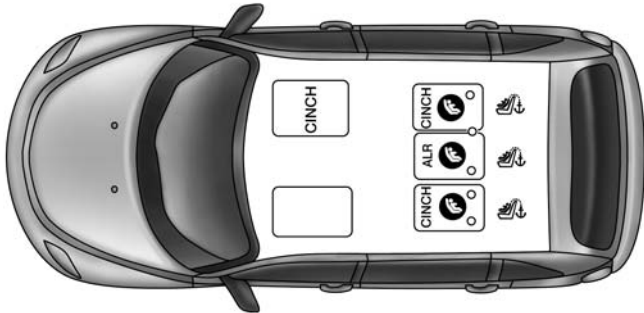


0226076812

2001–2004 Model Years

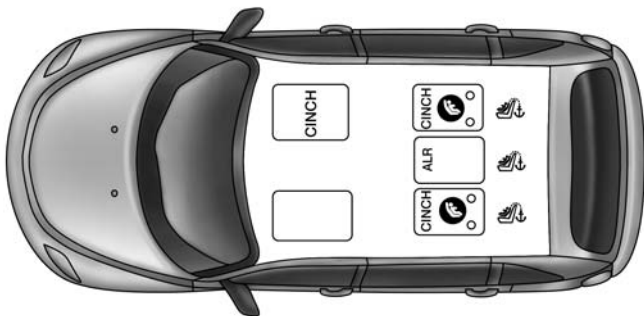

0226076813

2005 Model Year

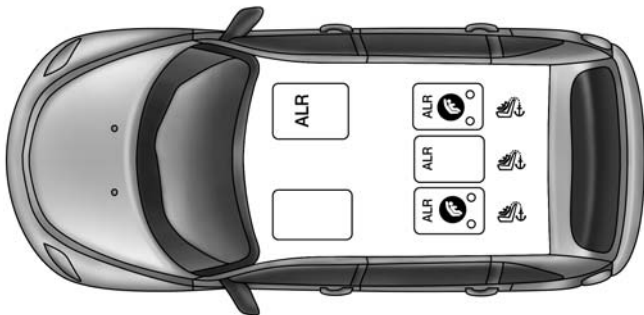


0226076815

2006–2010 Model Years


- ALR — Switchable Automatic Locking Retractor
- CINCH — Cinching Latch Plate
- Lower Anchorage Symbol (2 Anchorages Per Seating Position)
- Top Tether Anchorage Symbol

Locating The LATCH Lower Anchorages In This Vehicle

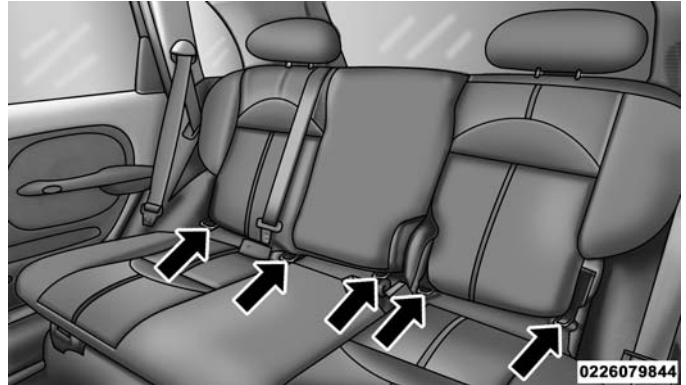

0226079844

Rear Seat LATCH Lower Anchorages (2001–2004 Model Years)

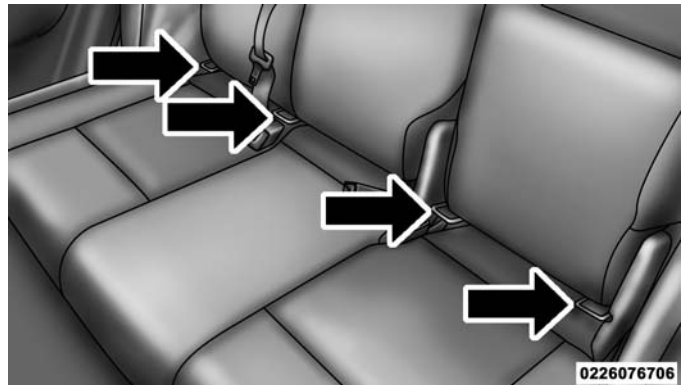


0226076706

Rear Seat LATCH Lower Anchorages (2005–2010 Model Years)

Locating The Tether Anchorages In This Vehicle



There are tether strap anchorages behind each rear seating position located on the back of the seat.

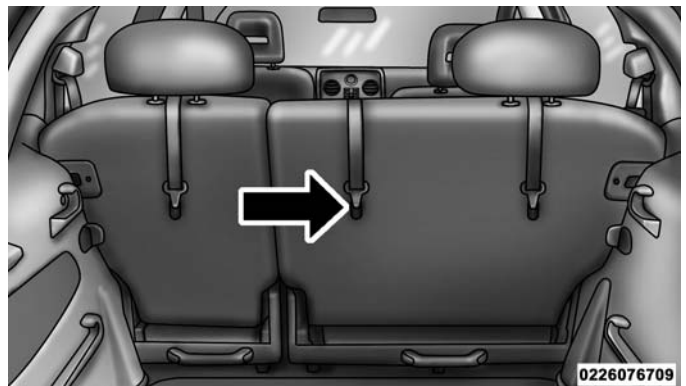

0226076709

Tether Strap Anchorages (2001–2010 Model Years)

Frequently Asked Questions About LATCH		
What is the weight limit (child's weight + weight of the child restraint) for using the LATCH anchorage system to attach the child restraint?	65 lbs (29.5 kg)	Use the LATCH anchorage system until the combined weight of the child and the child restraint is 65 lbs (29.5 kg). Use the seat belt alone instead of the LATCH anchorage system once the combined weight is more than 65 lbs (29.5 kg).
Can the LATCH anchorages and the seat belt be used together to attach a rear-facing or forward-facing child restraint?	No	Do not use the seat belt when you use the LATCH anchorage system to attach a rear-facing or forward-facing child restraint.
Can two child restraints be attached using a common lower LATCH anchorage?	No	Never "share" a LATCH anchorage with two or more child restraints. If the center position does not have dedicated LATCH lower anchorages, use the seat belt to install a child seat in the center position next to a child seat using the LATCH anchorages in an outboard position.
2001–2004 Model Years		
Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	The child seat may touch the back of the front passenger seat if the child restraint manufacturer also allows contact. See your child restraint Owner's Manual for more information.
Can the head restraints be removed?	No	
2005 Model Year		
Can a child seat be installed in the center position using the inner LATCH lower anchorages?	Yes	You can install child restraints with flexible lower anchors in the center position. The inner anchorages are 15.3 inches (390 mm) apart. Do not install child restraints with rigid lower anchors in the center position.
Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	The child seat may touch the back of the front passenger seat if the child restraint manufacturer also allows contact. See your child restraint Owner's Manual for more information.
Can the head restraints be removed?	No	
2006–2010 Model Years		
Can a child seat be installed in the center position using the inner LATCH lower anchorages?	Yes	You can install child restraints with flexible lower anchors in the center position. The inner anchorages are 15.3 inches (390 mm) apart. Do not install child restraints with rigid lower anchors in the center position.
Can the rear-facing child restraint touch the back of the front passenger seat?	No	Contact between the front passenger seat and a child restraint can affect the passenger airbag suppression system. See your Owner's Manual for more information.
Can the head restraints be removed?	No	

Center Seat LATCH

2001–2004 Model Years

If a child restraint installed in the center position blocks the seat belt webbing or buckle for the outboard position, do not use that outboard position. If a child seat in the center position blocks the outboard LATCH anchors or seat belt, do not install a child seat in that outboard position.

This vehicle is not designed to have three child restraints installed with LATCH at the same time. You may use LATCH to install one child restraint in the center position, or two child restraints in the outboard positions. **DO NOT** install more than two child restraints using LATCH at the same time.

WARNING!

Never use the same lower anchorage to attach more than one child restraint. If you are installing LATCH-compatible child restraints next to each other, you must use the seat belt for the center position. You can then use either the LATCH anchors or the vehicle's seat belt for installing child seats in the outboard positions. Please refer to "Installing The LATCH-Compatible Child Restraint System" for typical installation instructions.

2005–2010 Model Years

Do not install child restraints with rigid lower attachments in the center seating position. Only install this type of child restraint in the outboard seating positions. Child restraints with flexible, webbing mounted lower attachments can be installed in any rear seating position.


WARNING!

Never use the same lower anchorage to attach more than one child restraint. If you are installing LATCH-compatible child restraints next to each other, you must use the seat belt for the center position. You can then use either the LATCH anchors or the vehicle's seat belt for installing child seats in the outboard positions. Please refer to "Installing The LATCH-Compatible Child Restraint System" for typical installation instructions.

Connecting The Top Tether Strap (With Either Lower Anchors Or Vehicle Seat Belt)

When installing a forward-facing child restraint, always secure the top tether strap, up to the tether anchor weight limit, whether the child restraint is installed with the lower anchors or the vehicle seat belt.

1. Look behind the seating position where you plan to install the child restraint to find the tether anchorage. You may need to move the seat forward to provide better access to the tether anchorage. If there is no top tether anchorage for that seating position, move the child restraint to another position in the vehicle if one is available.
2. Route the tether strap to provide the most direct path for the strap between the anchor and the child seat. If your vehicle is equipped with adjustable rear head restraints, raise the head restraint, and where possible, route the tether strap under the head restraint and between the two posts. If not possible, lower the head restraint and pass the tether strap around the outboard side of the head restraint.

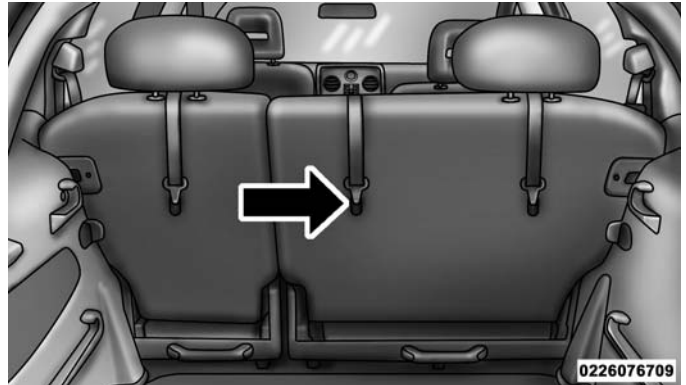

Tether Strap Anchorages (2001–2010 Model Years)


3. Attach the tether strap hook of the child restraint to the top tether anchorage.
4. Remove slack in the tether strap according to the child restraint manufacturer's instructions.

WARNING!

- An incorrectly anchored tether strap could lead to increased head motion and possible injury to the child. Use only the anchorage position directly behind the child seat to secure a child restraint top tether strap.
- If your vehicle is equipped with a split rear seat, make sure the tether strap does not slip into the opening between the seatbacks as you remove slack in the strap.


Seat Belt Systems In Your Vehicle

Lap/Shoulder Belt Systems For Installing Child Restraints In This Vehicle

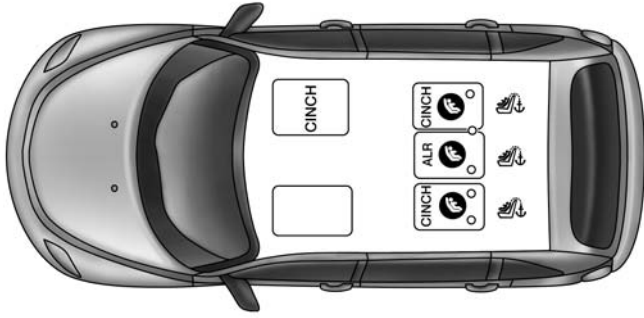


0226076812

2001–2004 Model Years

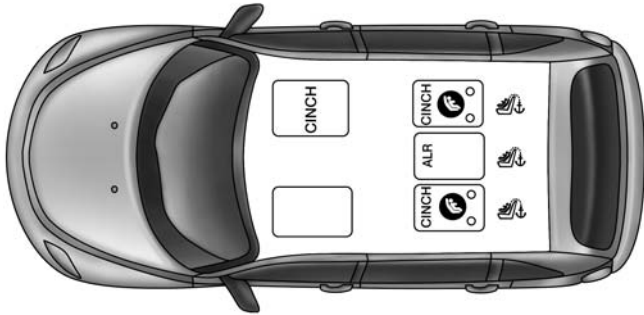

0226076813

2005 Model Year

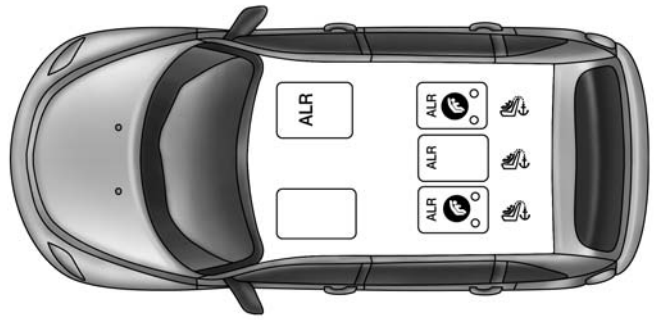

0226076815

2006–2010 Model Years

- ALR — Switchable Automatic Locking Retractor
- CINCH — Cinching Latch Plate
- Lower Anchorage Symbol (2 Anchorages Per Seating Position)
- Top Tether Anchorage Symbol

Frequently Asked Questions About Seat Belts And Car Seats

2001–2005 Model Years

What is the weight limit (child’s weight + weight of the child restraint) for using the Tether Anchor with the seat belt to attach a forward facing child restraint?	65 lbs (29.5 kg)	The Tether Anchor can be used with the seat belt until the combined weight of the child and the child restraint is 65 lbs (29.5 kg). Use the seat belt without the Tether Anchor once the combined weight is more than 65 lbs (29.5 kg).
Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	Contact between the front passenger seat and the child restraint is allowed, if the child restraint manufacturer also allows contact.
Can the head restraints be removed?	No	
Can the buckle stalk be twisted to tighten the seat belt against the belt path of the child restraint?	Yes	In positions with cinching latch plates (CINCH), the buckle stalk may be twisted up to 3 full turns. Do not twist the buckle stalk in a seating position with an ALR retractor.

Frequently Asked Questions About Seat Belts And Car Seats


2006–2010 Model Years

<p>What is the weight limit (child’s weight + weight of the child restraint) for using the Tether Anchor with the seat belt to attach a forward facing child restraint?</p>	<p>65 lbs (29.5 kg)</p>	<p>The Tether Anchor can be used with the seat belt until the combined weight of the child and the child restraint is 65 lbs (29.5 kg). Use the seat belt without the Tether Anchor once the combined weight is more than 65 lbs (29.5 kg).</p>
<p>Can the rear-facing child restraint touch the back of the front passenger seat?</p>	<p>No</p>	<p>Contact between the front passenger seat and a child restraint can affect the passenger airbag suppression system. See your Owner’s Manual for more information.</p>
<p>Can the head restraints be removed?</p>	<p>No</p>	
<p>Can the buckle stalk be twisted to tighten the seat belt against the belt path of the child restraint?</p>	<p>No</p>	<p>Do not twist the buckle stalk in a seating position with an ALR retractor.</p>

CHRYSLER SEBRING CONVERTIBLE, 2001–2006, 2008–2010


LATCH And Tethers In Your Vehicle

LATCH Positions For Installing Child Restraints In This Vehicle

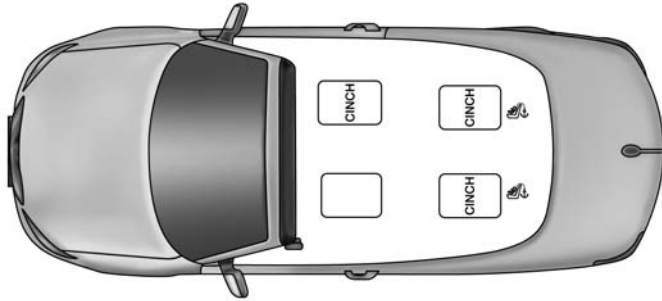


0226076768

2001–2002 Model Years

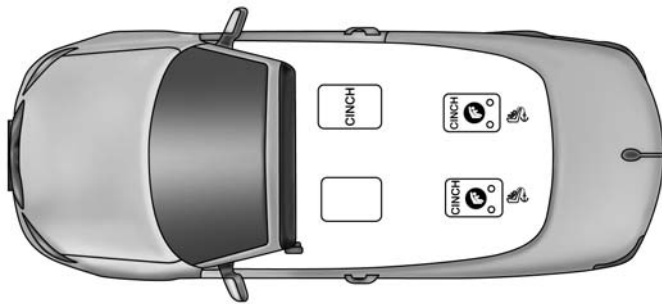

0226076769

2003–2006 Model Years

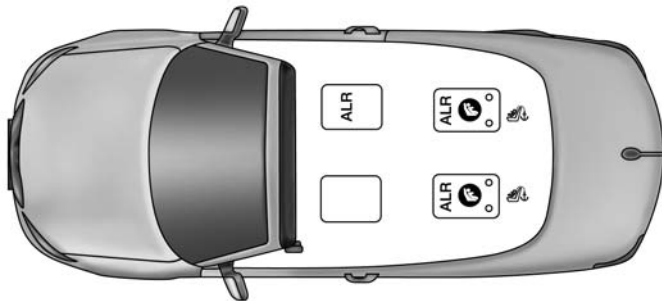


0226076770

2008–2010 Model Years

- ALR — Switchable Automatic Locking Retractor
- CINCH — Cinching Latch Plate
- Lower Anchorage Symbol (2 Anchorages Per Seating Position)
- Top Tether Anchorage Symbol

Locating The LATCH Lower Anchorages In This Vehicle

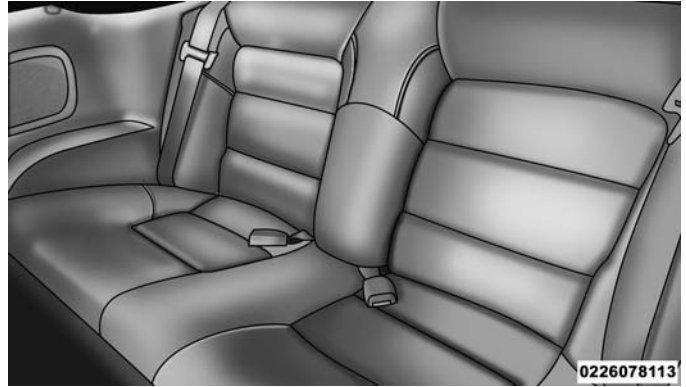

Rear Seat Has No LATCH Lower Anchorages (2001–2002 Model Years)



Rear Seat LATCH Lower Anchorages (2003–2010 Model Years)

Locating The Tether Anchorages In This Vehicle


2001–2006 Model Years



There are tether strap anchorages behind each rear seating position located in the bottom of the convertible top well, behind the seat back. The anchors are under the carpet cutouts marked with this symbol.




Child Tether Anchor Location (2001–2006 Model Years)

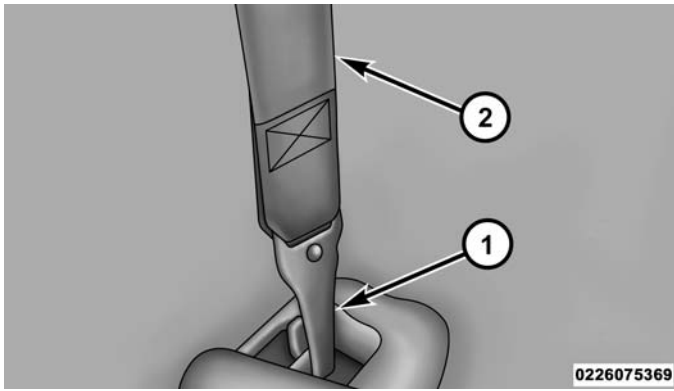

Child Tether Anchor (2001–2006 Model Years)

1 — Tether Hook And Anchor 2 — Tether Strap

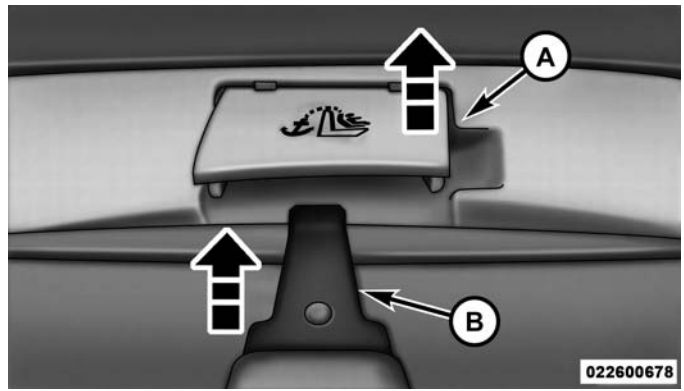


Child Tether Access Port Cover (2008–2010 Model Years)

A — Cover B — Tether Strap Hook

2008–2010 Model Years



There are tether strap anchorages behind each rear seating position. Access ports to the tether anchors are located in the panel between the rear seat and the rear window. The tether anchors are underneath access covers in the carpet covering the back of the seat where you see the tether anchorage symbol.

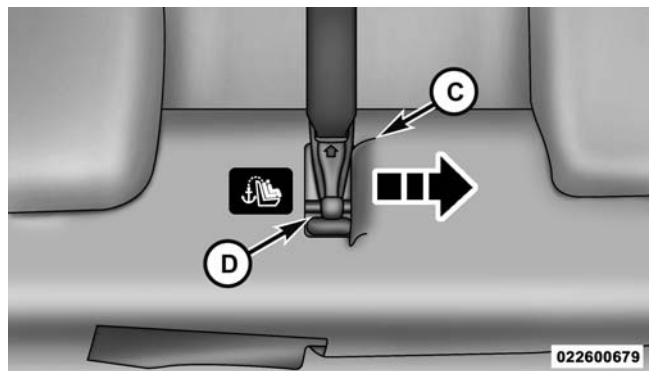

Child Tether Anchor (2008–2010 Model Years)

C — Attaching Strap D — Tether Anchor

Frequently Asked Questions About LATCH

What is the weight limit (child’s weight + weight of the child restraint) for using the LATCH anchorage system to attach the child restraint?	65 lbs (29.5 kg)	Use the LATCH anchorage system until the combined weight of the child and the child restraint is 65 lbs (29.5 kg). Use the seat belt alone instead of the LATCH anchorage system once the combined weight is more than 65 lbs (29.5 kg).
Can the LATCH anchorages and the seat belt be used together to attach a rear-facing or forward-facing child restraint?	No	Do not use the seat belt when you use the LATCH anchorage system to attach a rear-facing or forward-facing child restraint.
Can two child restraints be attached using a common lower LATCH anchorage?	No	Never “share” a LATCH anchorage with two or more child restraints.
Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	The child seat may touch the back of the front passenger seat if the child restraint manufacturer also allows contact. See your child restraint Owner’s Manual for more information.
Can the head restraints be removed?	No	

Center Seat LATCH

WARNING!


This vehicle does not have a center seating position. Do not use the center lower LATCH anchorages to install a child seat in the center of the back seat.

Connecting The Top Tether Strap (With Either Lower Anchors Or Vehicle Seat Belt)

When installing a forward-facing child restraint, always secure the top tether strap, up to the tether anchor weight limit, whether the child restraint is installed with the lower anchors or the vehicle seat belt.


2001–2006 Model Years

1. Lift the carpet flap to expose the anchor directly behind the seat where you are placing the child restraint.

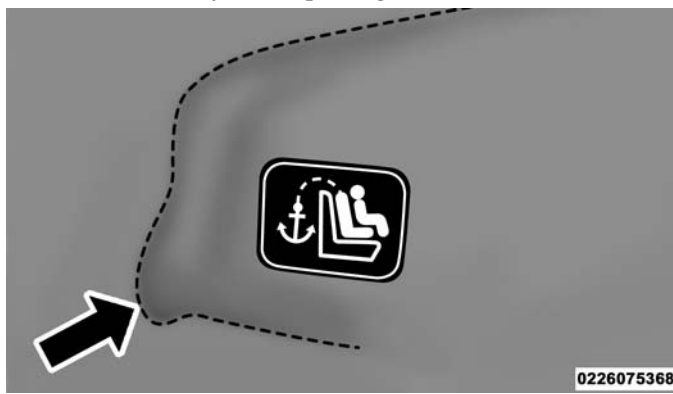

Child Tether Anchor Location

2. Route the tether strap to provide the most direct path for the strap between the anchor and the child seat.
3. Remove slack in the tether strap according to the child restraint manufacturer’s instructions.

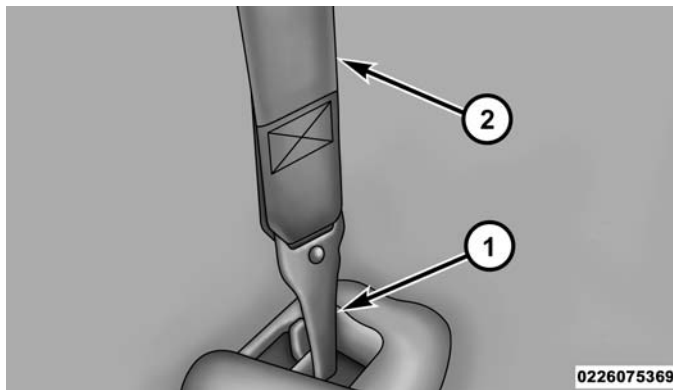


Hook And Anchor

1 — Hook 2 — Anchor

2008–2010 Model Years

1. If lowered, raise the convertible top. The convertible top must be in the UP position to access the tether anchor.
2. Open the access port cover behind the seat where you are placing the child restraint.


3. Push the tether strap and hook through the access port and down into the trunk. Route the tether strap to provide the most direct path from the child seat to the anchor.

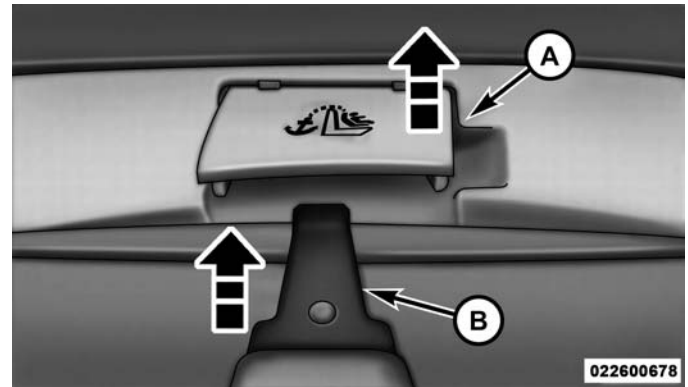

Child Tether Access Port Cover

A — Cover B — Tether Strap Hook

4. Open the access cover on the carpet covering the back of the seat and attach the tether strap hook to the anchor.

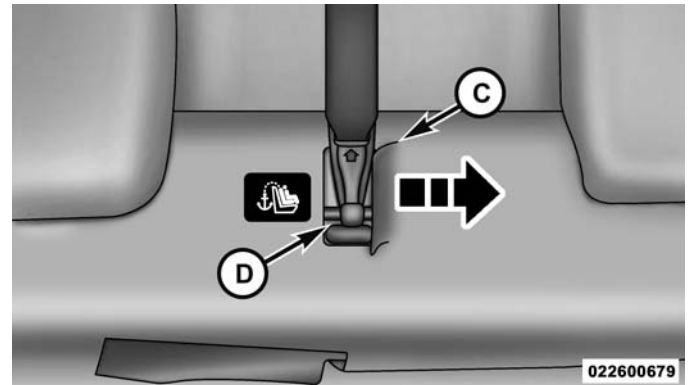

Child Tether Anchor

C — Attaching Strap D — Tether Anchor


5. Remove slack in the tether strap according to the child restraint manufacturer’s instructions.

WARNING!

- An incorrectly anchored tether strap could lead to increased head motion and possible injury to the child. Use only the anchorage position directly behind the child seat to secure a child restraint top tether strap.
- If your vehicle is equipped with a split rear seat, make sure the tether strap does not slip into the opening between the seatbacks as you remove slack in the strap.


Seat Belt Systems In Your Vehicle

Lap/Shoulder Belt Systems For Installing Child Restraints In This Vehicle

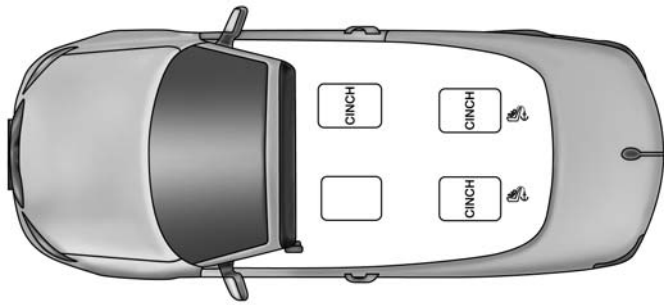

0226076768


2001–2002 Model Years

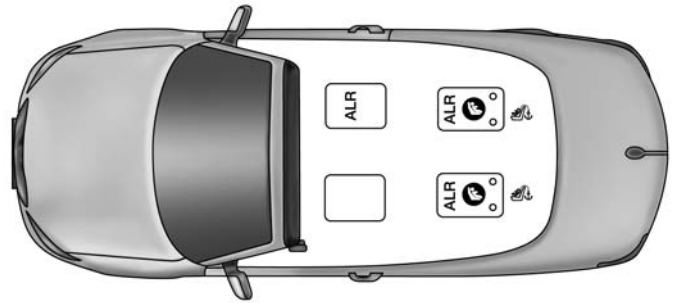

0226076770

2008–2010 Model Years

- ALR — Switchable Automatic Locking Retractor
- CINCH — Cinching Latch Plate
- Lower Anchorage Symbol (2 Anchorages Per Seating Position)
- Top Tether Anchorage Symbol

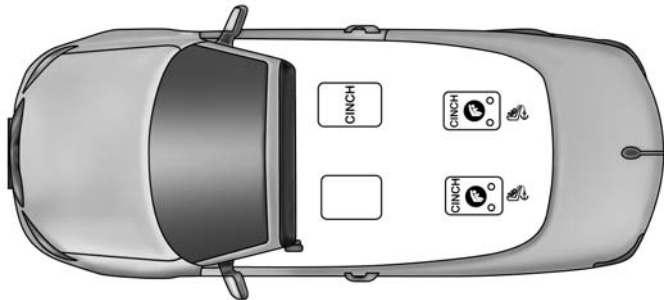

0226076769

2003–2006 Model Years


Frequently Asked Questions About Seat Belts And Car Seats

What is the weight limit (child's weight + weight of the child restraint) for using the Tether Anchor with the seat belt to attach a forward facing child restraint?	65 lbs (29.5 kg)	The Tether Anchor can be used with the seat belt until the combined weight of the child and the child restraint is 65 lbs (29.5 kg). Use the seat belt without the Tether Anchor once the combined weight is more than 65 lbs (29.5 kg).
Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	Contact between the front passenger seat and the child restraint is allowed, if the child restraint manufacturer also allows contact.
Can the head restraints be removed?	No	
2001–2006 Model Years		
Can the buckle stalk be twisted to tighten the seat belt against the belt path of the child restraint?	Yes	In positions with cinching latch plates (CINCH), the buckle stalk may be twisted up to 3 full turns.
2008–2010 Model Years		
Can the buckle stalk be twisted to tighten the seat belt against the belt path of the child restraint?	No	Do not twist the buckle stalk in a seating position with an ALR retractor.

CHRYSLER SEBRING COUPE, 2000–2005


LATCH And Tethers In Your Vehicle

LATCH Positions For Installing Child Restraints In This Vehicle

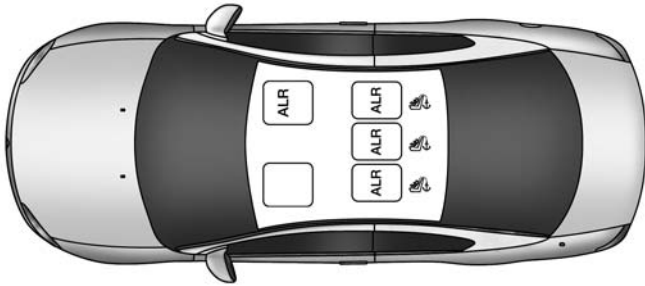

0226077525

2000–2002 Model Years

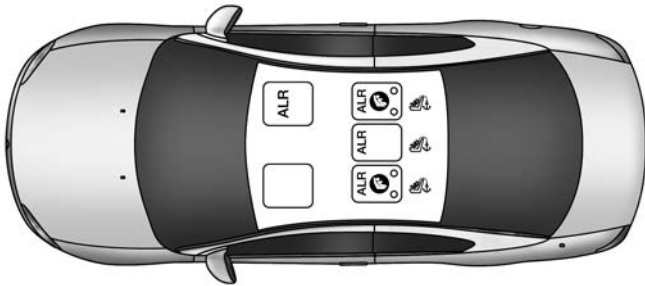

0226077526

2003–2005 Model Years


- ALR — Switchable Automatic Locking Retractor
- Lower Anchorage Symbol (2 Anchorages Per Seating Position)
- Top Tether Anchorage Symbol

Locating The LATCH Lower Anchorages In This Vehicle



0226078114

Rear Seat Has No LATCH Lower Anchorages (2000–2002 Model Years)

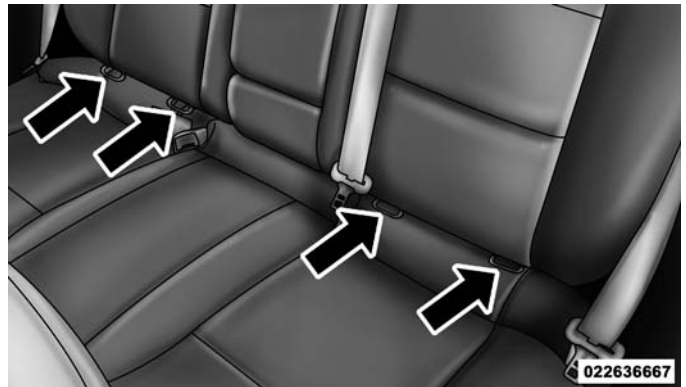


022636667

Rear Seat LATCH Lower Anchorages (2003–2005 Model Years)

Locating The Tether Anchorages In This Vehicle



There are tether strap anchorages behind each rear seating position located in the panel between the rear seatback and the rear window. They are found under a plastic cover with the tether anchorage symbol on it.

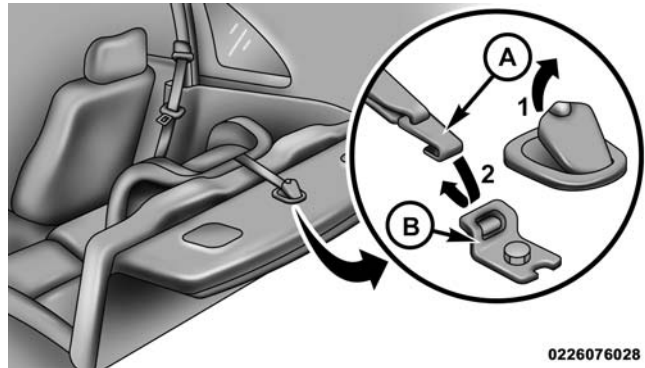

0226076028

Tether Strap Anchorages (2000–2005 Model Years)

- | | |
|-------------------------|-----------------------|
| 1 — Cover | A — Tether Strap Hook |
| 2 — Attaching The Strap | B — Tether Anchor |

Frequently Asked Questions About LATCH		
2000–2002 Model Years (No Lower Anchorages)		
2003–2005 Model Years		
What is the weight limit (child’s weight + weight of the child restraint) for using the LATCH anchorage system to attach the child restraint?	65 lbs (29.5 kg)	Use the LATCH anchorage system until the combined weight of the child and the child restraint is 65 lbs (29.5 kg). Use the seat belt alone instead of the LATCH anchorage system once the combined weight is more than 65 lbs (29.5 kg).
Can a child seat be installed in the center position using the inner LATCH lower anchorages?	No	Use the seat belt and tether anchor to install a child seat in the center seating position.
Can the LATCH anchorages and the seat belt be used together to attach a rear-facing or forward-facing child restraint?	No	Do not use the seat belt when you use the LATCH anchorage system to attach a rear-facing or forward-facing child restraint.
Can two child restraints be attached using a common lower LATCH anchorage?	No	Never “share” a LATCH anchorage with two or more child restraints.
Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	The child seat may touch the back of the front passenger seat if the child restraint manufacturer also allows contact. See your child restraint Owner’s Manual for more information.
Can the head restraints be removed?	No	

Center Seat LATCH

2003–2005 Model Years


WARNING!
<ul style="list-style-type: none"> • Do not install a child restraint in the center position using the LATCH system. This position is not approved for installing child seats using the LATCH attachments. You must use the seat belt and tether anchor to install a child seat in the center seating position. • Never use the same lower anchorage to attach more than one child restraint. Please refer to “Installing The LATCH-Compatible Child Restraint System” for typical installation instructions.

Connecting The Top Tether Strap (With Either Lower Anchors Or Vehicle Seat Belt)

When installing a forward-facing child restraint, always secure the top tether strap, up to the tether anchor weight limit, whether the child restraint is installed with the lower anchors or the vehicle seat belt.

1. Look behind the seating position where you plan to install the child restraint to find the tether anchorage. You may need to move the seat forward to provide better access to the tether anchorage. If there is no top tether anchorage for that seating position, move the child restraint to another position in the vehicle if one is available.
2. Rotate or lift the cover to access the anchor directly behind the seat where you are placing the child restraint.

3. Route the tether strap to provide the most direct path for the strap between the anchor and the child seat. If your vehicle is equipped with adjustable rear head restraints, raise the head restraint, and where possible, route the tether strap under the head restraint and between the two posts. If not possible, lower the head restraint and pass the tether strap around the outboard side of the head restraint.

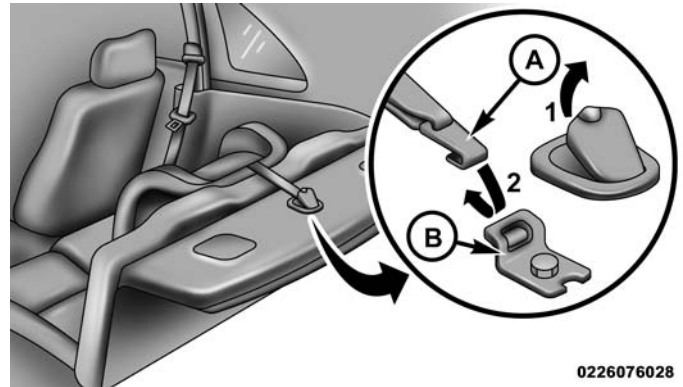

0226076028


Tether Strap Mounting

- | | |
|-------------------------|-----------------------|
| 1 — Cover | A — Tether Strap Hook |
| 2 — Attaching The Strap | B — Tether Anchor |

4. Attach the tether strap hook of the child restraint to the top tether anchorage as shown in the diagram.

5. Remove slack in the tether strap according to the child restraint manufacturer’s instructions.

WARNING!
<ul style="list-style-type: none"> • An incorrectly anchored tether strap could lead to increased head motion and possible injury to the child. Use only the anchorage position directly behind the child seat to secure a child restraint top tether strap. • If your vehicle is equipped with a split rear seat, make sure the tether strap does not slip into the opening between the seatbacks as you remove slack in the strap.

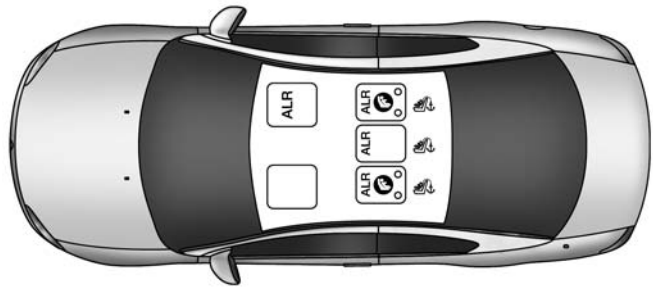


0226077526

2003–2005 Model Years

- ALR — Switchable Automatic Locking Retractor
- Lower Anchorage Symbol (2 Anchorages Per Seating Position)
- Top Tether Anchorage Symbol

Seat Belt Systems In Your Vehicle

Lap/Shoulder Belt Systems For Installing Child Restraints In This Vehicle

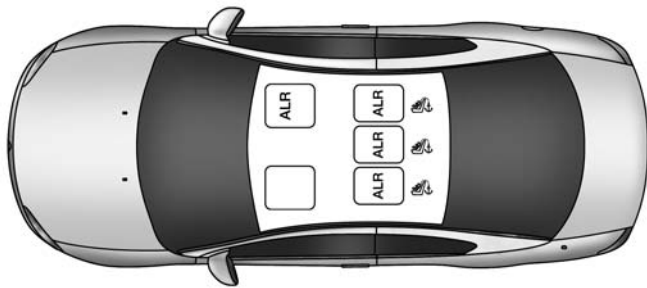

0226077525


2000–2002 Model Years

Frequently Asked Questions About Seat Belts And Car Seats		
What is the weight limit (child’s weight + weight of the child restraint) for using the Tether Anchor with the seat belt to attach a forward facing child restraint?	65 lbs (29.5 kg)	The Tether Anchor can be used with the seat belt until the combined weight of the child and the child restraint is 65 lbs (29.5 kg). Use the seat belt without the Tether Anchor once the combined weight is more than 65 lbs (29.5 kg).
Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	Contact between the front passenger seat and the child restraint is allowed, if the child restraint manufacturer also allows contact.
Can the head restraints be removed?	No	
Can the buckle stalk be twisted to tighten the seat belt against the belt path of the child restraint?	No	Do not twist the buckle stalk in a seating position with an ALR retractor.

CHRYSLER SEBRING SEDAN, 2001–2010


LATCH And Tethers In Your Vehicle

LATCH Positions For Installing Child Restraints In This Vehicle

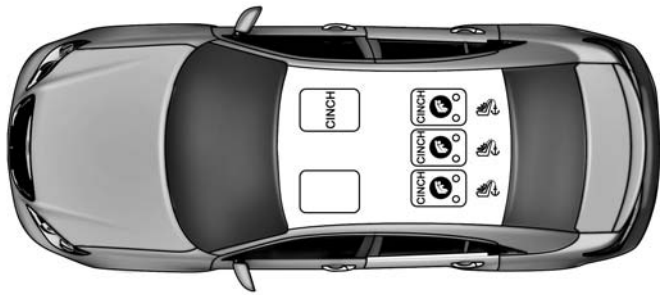


0226076771

2001–2003 Model Years

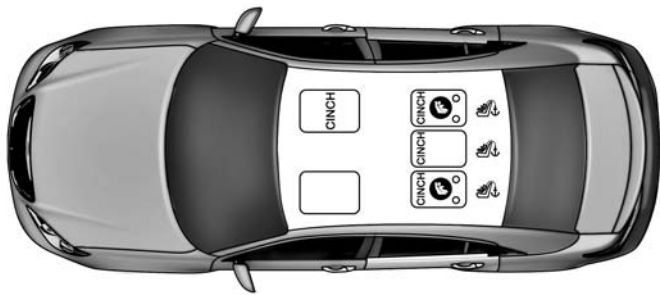



0226076773

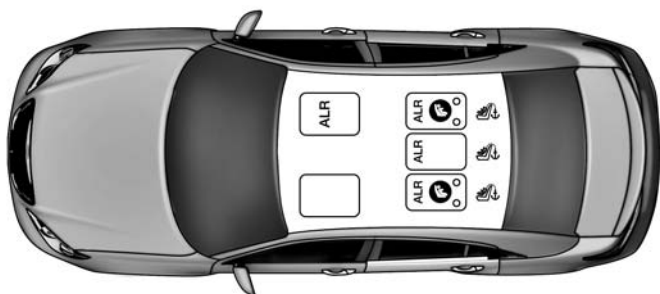2004–2006 Model Years




0226076774


2007–2010 Model Years

- ALR — Switchable Automatic Locking Retractor
- CINCH — Cinching Latch Plate
-  Lower Anchorage Symbol (2 Anchorages Per Seating Position)
-  Top Tether Anchorage Symbol

Locating The LATCH Lower Anchorages In This Vehicle

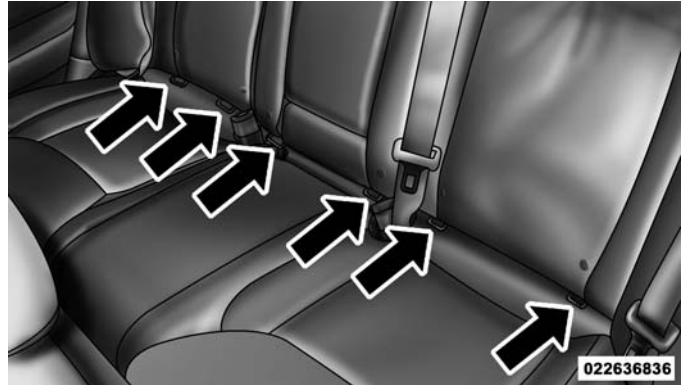

Rear Seat LATCH Lower Anchorages (2001–2003 Model Years)

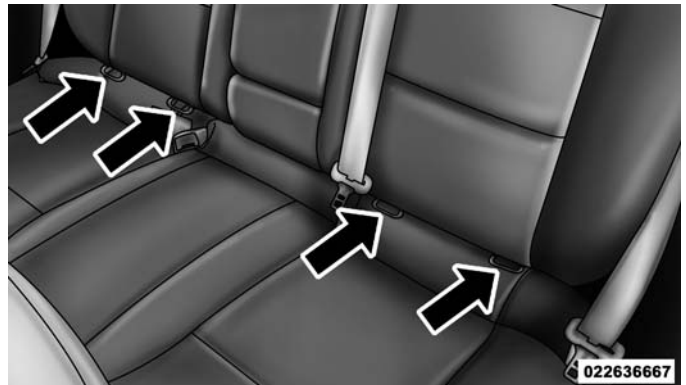


Rear Seat LATCH Lower Anchorages (2004–2010 Model Years)


Locating The Tether Anchorages In This Vehicle



There are tether strap anchorages behind each rear seating position located in the panel between the rear seatback and the rear window. They are found under a plastic cover with the tether anchorage symbol on it.

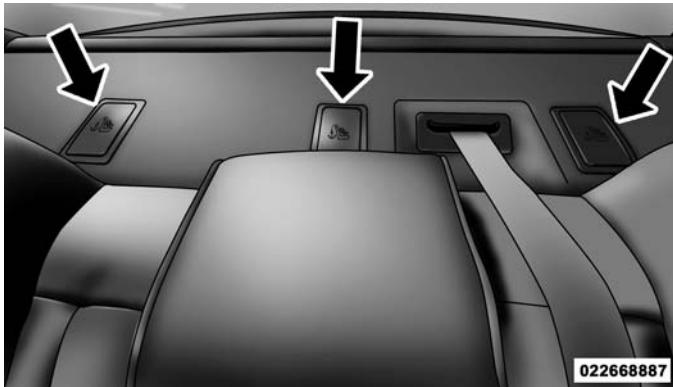

Tether Strap Anchorages

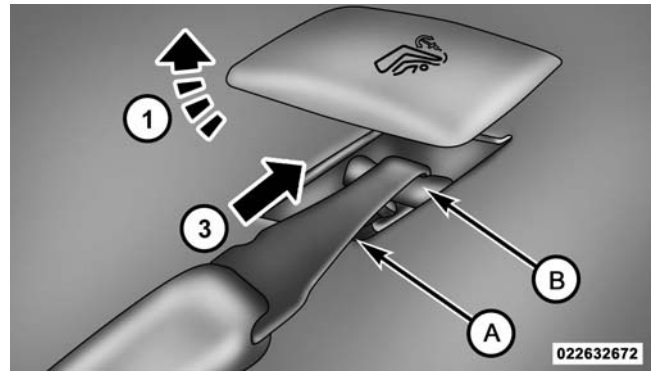

Tether Anchorages

- 1 — Cover
- 3 — Attaching Strap
- A — Tether Strap Hook
- B — Tether Anchor

Frequently Asked Questions About LATCH

2001–2003 Model Years

What is the weight limit (child’s weight + weight of the child restraint) for using the LATCH anchorage system to attach the child restraint?	65 lbs (29.5 kg)	Use the LATCH anchorage system until the combined weight of the child and the child restraint is 65 lbs (29.5 kg). Use the seat belt alone instead of the LATCH anchorage system once the combined weight is more than 65 lbs (29.5 kg).
Can the LATCH anchorages and the seat belt be used together to attach a rear-facing or forward-facing child restraint?	No	Do not use the seat belt when you use the LATCH anchorage system to attach a rear-facing or forward-facing child restraint.
Can two child restraints be attached using a common lower LATCH anchorage?	No	Never “share” a LATCH anchorage with two or more child restraints.
Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	The child seat may touch the back of the front passenger seat if the child restraint manufacturer also allows contact. See your child restraint Owner’s Manual for more information.
Can the head restraints be removed?	No	

2004–2006 Model Years

What is the weight limit (child’s weight + weight of the child restraint) for using the LATCH anchorage system to attach the child restraint?	65 lbs (29.5 kg)	Use the LATCH anchorage system until the combined weight of the child and the child restraint is 65 lbs (29.5 kg). Use the seat belt alone instead of the LATCH anchorage system once the combined weight is more than 65 lbs (29.5 kg).
Can a child seat be installed in the center position using the inner LATCH lower anchorages?	Yes	You can install child restraints with flexible lower anchors in the center position. The inner anchorages are 15.4 inches (392 mm) apart. Do not install child restraints with rigid lower anchors in the center position.
Can the LATCH anchorages and the seat belt be used together to attach a rear-facing or forward-facing child restraint?	No	Do not use the seat belt when you use the LATCH anchorage system to attach a rear-facing or forward-facing child restraint.
Can two child restraints be attached using a common lower LATCH anchorage?	No	Never “share” a LATCH anchorage with two or more child restraints.
Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	The child seat may touch the back of the front passenger seat if the child restraint manufacturer also allows contact. See your child restraint Owner’s Manual for more information.
Can the head restraints be removed?	No	

Frequently Asked Questions About LATCH		
2007–2010 Model Years		
What is the weight limit (child’s weight + weight of the child restraint) for using the LATCH anchorage system to attach the child restraint?	65 lbs (29.5 kg)	Use the LATCH anchorage system until the combined weight of the child and the child restraint is 65 lbs (29.5 kg). Use the seat belt and tether anchor instead of the LATCH system once the combined weight is more than 65 lbs (29.5 kg).
Can a child seat be installed in the center position using the inner LATCH lower anchorages?	Yes	You can install child restraints with flexible lower anchors in the center position. The inner anchorages are 15.4 inches (392 mm) apart. Do not install child restraints with rigid lower anchors in the center position.
Can the LATCH anchorages and the seat belt be used together to attach a rear-facing or forward-facing child restraint?	No	Do not use the seat belt when you use the LATCH anchorage system to attach a rear-facing or forward-facing child restraint.
Can two child restraints be attached using a common lower LATCH anchorage?	No	Never “share” a LATCH anchorage with two or more child restraints.
Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	The child seat may touch the back of the front passenger seat if the child restraint manufacturer also allows contact. See your child restraint Owner’s Manual for more information.
Can the head restraints be removed?	No	

Center Seat LATCH

2001–2003 Model Years

If a child restraint installed in the center position blocks the seat belt webbing or buckle for the outboard position, do not use that outboard position. If a child seat in the center position blocks the outboard LATCH anchors or seat belt, do not install a child seat in that outboard position.

WARNING!
Never use the same lower anchorage to attach more than one child restraint. Please refer to “Installing The LATCH-Compatible Child Restraint System” for typical installation instructions.

2004–2010 Model Years


Do not install child restraints with rigid lower attachments in the center seating position. Only install this type of child restraint in the outboard seating positions. Child restraints with flexible, webbing mounted lower attachments can be installed in any rear seating position.

WARNING!
Never use the same lower anchorage to attach more than one child restraint. If you are installing LATCH-compatible child restraints next to each other, you must use the seat belt for the center position. You can then use either the LATCH anchors or the vehicle’s seat belt for installing child seats in the outboard positions. Please refer to “Installing The LATCH-Compatible Child Restraint System” for typical installation instructions.

Connecting The Top Tether Strap (With Either Lower Anchors Or Vehicle Seat Belt)

When installing a forward-facing child restraint, always secure the top tether strap, up to the tether anchor weight limit, whether the child restraint is installed with the lower anchors or the vehicle seat belt.

1. Look behind the seating position where you plan to install the child restraint to find the tether anchorage. You may need to move the seat forward to provide better access to the tether anchorage. If there is no top tether anchorage for that seating position, move the child restraint to another position in the vehicle if one is available.
2. Rotate or lift the cover to access the anchor directly behind the seat where you are placing the child restraint.
3. Route the tether strap to provide the most direct path for the strap between the anchor and the child seat. If your vehicle is equipped with adjustable rear head restraints, raise the head restraint, and where possible, route the tether strap under the head restraint and between the two posts. If not possible, lower the head restraint and pass the tether strap around the outboard side of the head restraint.

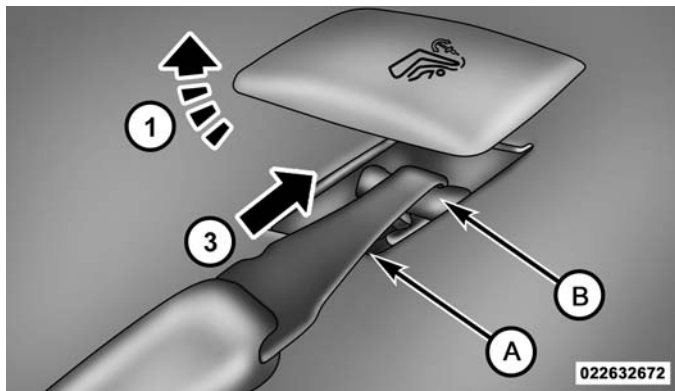

Tether Anchorages

- | | |
|---------------------|-----------------------|
| 1 — Cover | A — Tether Strap Hook |
| 3 — Attaching Strap | B — Tether Anchor |


4. Attach the tether strap hook of the child restraint to the top tether anchorage as shown in the diagram.
5. Remove slack in the tether strap according to the child restraint manufacturer’s instructions.

WARNING!

- An incorrectly anchored tether strap could lead to increased head motion and possible injury to the child. Use only the anchorage position directly behind the child seat to secure a child restraint top tether strap.
- If your vehicle is equipped with a split rear seat, make sure the tether strap does not slip into the opening between the seatbacks as you remove slack in the strap.


Seat Belt Systems In Your Vehicle

Lap/Shoulder Belt Systems For Installing Child Restraints In This Vehicle

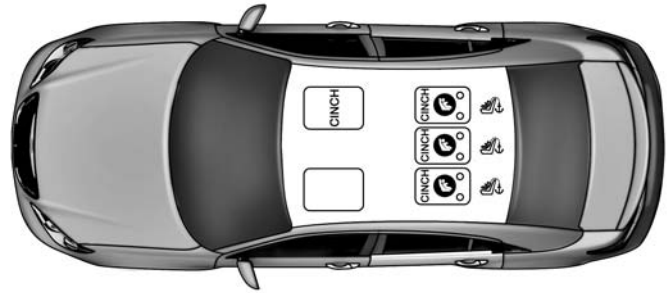


0226076771

2001–2003 Model Years

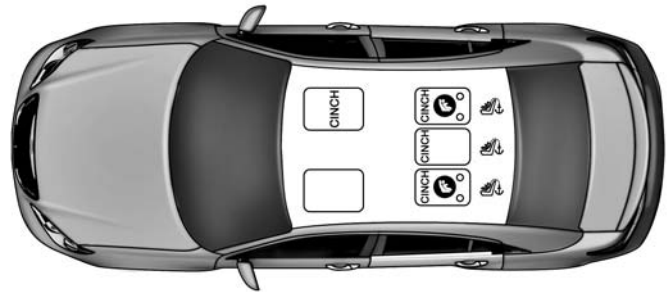

0226076773

2004–2006 Model Years

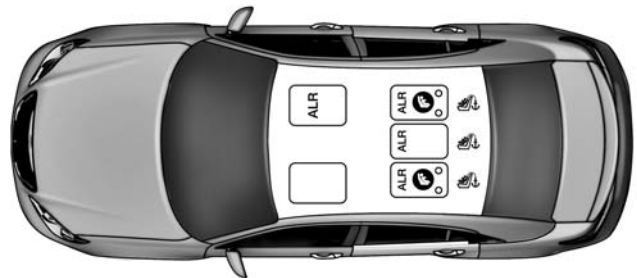

0226076774

2007–2010 Model Years

- ALR — Switchable Automatic Locking Retractor
- CINCH — Cinching Latch Plate
- Lower Anchorage Symbol (2 Anchorages Per Seating Position)
- Top Tether Anchorage Symbol

Frequently Asked Questions About Seat Belts And Car Seats

2001–2006 Model Years

What is the weight limit (child’s weight + weight of the child restraint) for using the Tether Anchor with the seat belt to attach a forward facing child restraint?	65 lbs (29.5 kg)	The Tether Anchor can be used with the seat belt until the combined weight of the child and the child restraint is 65 lbs (29.5 kg). Use the seat belt without the Tether Anchor once the combined weight is more than 65 lbs (29.5 kg).
Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	Contact between the front passenger seat and the child restraint is allowed, if the child restraint manufacturer also allows contact.
Can the head restraints be removed?	No	
Can the buckle stalk be twisted to tighten the seat belt against the belt path of the child restraint?	Yes	In positions with cinching latch plates (CINCH), the buckle stalk may be twisted up to 3 full turns.

2007–2010 Model Years

What is the weight limit (child’s weight + weight of the child restraint) for using the Tether Anchor with the seat belt to attach a forward facing child restraint?	Weight limit of the Child Restraint	Always use the tether anchor when using the seat belt to install a forward facing child restraint, up to the recommended weight limit of the child restraint.
Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	Contact between the front passenger seat and the child restraint is allowed, if the child restraint manufacturer also allows contact.
Can the head restraints be removed?	No	
Can the buckle stalk be twisted to tighten the seat belt against the belt path of the child restraint?	No	Do not twist the buckle stalk in a seating position with an ALR retractor.

INSTALLING CHILD RESTRAINTS IN YOUR VEHICLE — DODGE


CONTENTS

■ DODGE AVENGER, 2008–201351	□ Connecting The Top Tether Strap (With The Vehicle Seat Belt)67
□ LATCH And Tethers In Your Vehicle51	□ Seat Belt Systems In Your Vehicle68
□ Center Seat LATCH52	■ DODGE MAGNUM, 2005–200870
□ Connecting The Top Tether Strap (With Either Lower Anchors Or Vehicle Seat Belt)52	□ LATCH And Tethers In Your Vehicle70
□ Seat Belt Systems In Your Vehicle53	□ Center Seat LATCH71
■ DODGE CALIBER, 2007–2012.54	□ Connecting The Top Tether Strap (With Either Lower Anchors Or Vehicle Seat Belt)71
□ LATCH And Tethers In Your Vehicle54	□ Seat Belt Systems In Your Vehicle71
□ Center Seat LATCH55	■ DODGE NEON, 2000–2005.73
□ Connecting The Top Tether Strap (With Either Lower Anchors Or Vehicle Seat Belt)55	□ LATCH And Tethers In Your Vehicle73
□ Seat Belt Systems In Your Vehicle56	□ Center Seat LATCH74
■ DODGE CHALLENGER, 2008–201357	□ Connecting The Top Tether Strap (With Either Lower Anchors Or Vehicle Seat Belt)74
□ LATCH And Tethers In Your Vehicle57	□ Seat Belt Systems In Your Vehicle75
□ Center Seat LATCH58	■ DODGE STRATUS COUPE, 2000–200576
□ Connecting The Top Tether Strap (With Either Lower Anchors Or Vehicle Seat Belt)58	□ LATCH And Tethers In Your Vehicle76
□ Seat Belt Systems In Your Vehicle59	□ Center Seat LATCH77
■ DODGE CHARGER, 2006–201360	□ Connecting The Top Tether Strap (With Either Lower Anchors Or Vehicle Seat Belt)77
□ LATCH And Tethers In Your Vehicle60	□ Seat Belt Systems In Your Vehicle78
□ Center Seat LATCH61	■ DODGE STRATUS SEDAN, 2001–200679
□ Connecting The Top Tether Strap (With The Vehicle Seat Belt)61	□ LATCH And Tethers In Your Vehicle79
□ Seat Belt Systems In Your Vehicle62	□ Center Seat LATCH80
■ DODGE DART, 201363	□ Connecting The Top Tether Strap (With Either Lower Anchors Or Vehicle Seat Belt)81
□ LATCH And Tethers In Your Vehicle63	□ Seat Belt Systems In Your Vehicle81
□ Center Seat LATCH64	■ DODGE VIPER, 2000–2006, 2008–2010.83
□ Connecting The Top Tether Strap (With Either Lower Anchors Or Vehicle Seat Belt)64	□ LATCH And Tethers In Your Vehicle83
□ Seat Belt Systems In Your Vehicle65	□ Connecting The Top Tether Strap (With Either Lower Anchors Or Vehicle Seat Belt)84
■ DODGE INTREPID, 2000–2003.66	□ Seat Belt Systems In Your Vehicle85
□ LATCH And Tethers In Your Vehicle66		
□ Center Seat LATCH67		

DODGE AVENGER, 2008–2013

LATCH And Tethers In Your Vehicle

LATCH Positions For Installing Child Restraints In This Vehicle

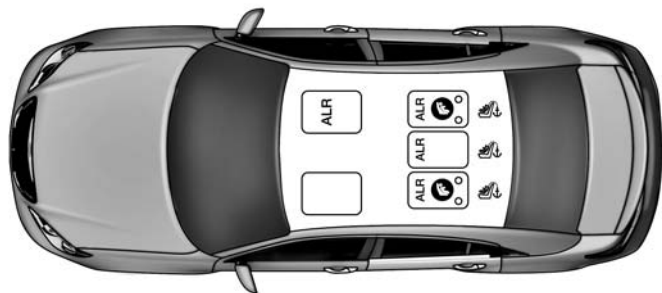


0226076774

2008–2013 Model Years

- ALR — Switchable Automatic Locking Retractor
- Lower Anchorage Symbol (2 Anchorages Per Seating Position)
- Top Tether Anchorage Symbol

Locating The LATCH Lower Anchorages In This Vehicle

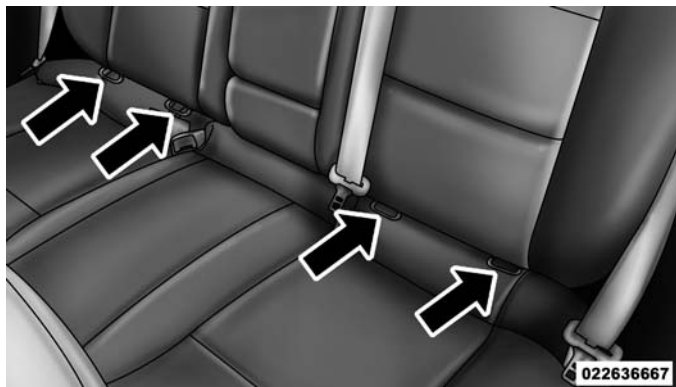


022636667

Rear Seat LATCH Lower Anchorages (2011–2013 Model Years)

Locating The Tether Anchorages In This Vehicle




There are tether strap anchorages behind each rear seating position located in the panel between the rear seatback and the rear window. They are found under a plastic cover with the tether anchorage symbol on it.

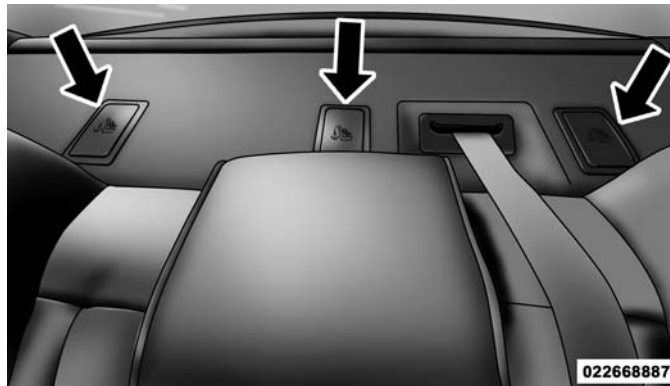

022668887

Tether Strap Anchorages

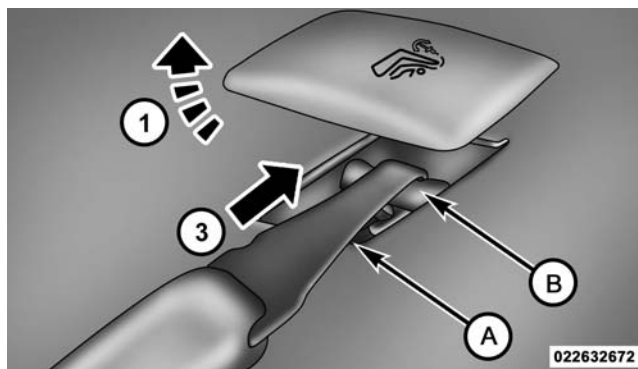

022632672

Tether Anchorages

- 1 — Cover
- 3 — Attaching Strap
- A — Tether Strap Hook
- B — Tether Anchor

Frequently Asked Questions About LATCH

What is the weight limit (child’s weight + weight of the child restraint) for using the LATCH anchorage system to attach the child restraint?	65 lbs (29.5 kg)	Use the LATCH anchorage system until the combined weight of the child and the child restraint is 65 lbs (29.5 kg). Use the seat belt and tether anchor instead of the LATCH system once the combined weight is more than 65 lbs (29.5 kg).
Can a child seat be installed in the center position using the inner LATCH lower anchorages?	Yes	You can install child restraints with flexible lower anchors in the center position. The inner anchorages are 15.4 inches (392 mm) apart. Do not install child restraints with rigid lower anchors in the center position.
Can the LATCH anchorages and the seat belt be used together to attach a rear-facing or forward-facing child restraint?	No	Do not use the seat belt when you use the LATCH anchorage system to attach a rear-facing or forward-facing child restraint.

Frequently Asked Questions About LATCH

Can two child restraints be attached using a common lower LATCH anchorage?	No	Never “share” a LATCH anchorage with two or more child restraints.
Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	The child seat may touch the back of the front passenger seat if the child restraint manufacturer also allows contact. See your child restraint Owner’s Manual for more information.
Can the head restraints be removed?	No	

Center Seat LATCH

Do not install child restraints with rigid lower attachments in the center seating position. Only install this type of child restraint in the outboard seating positions. Child restraints with flexible, webbing mounted lower attachments can be installed in any rear seating position.


WARNING!

Never use the same lower anchorage to attach more than one child restraint. If you are installing LATCH-compatible child restraints next to each other, you must use the seat belt for the center position. You can then use either the LATCH anchors or the vehicle’s seat belt for installing child seats in the outboard positions. Please refer to “Installing The LATCH-Compatible Child Restraint System” for typical installation instructions.

Connecting The Top Tether Strap (With Either Lower Anchors Or Vehicle Seat Belt)

When installing a forward-facing child restraint, always secure the top tether strap, up to the tether anchor weight limit, whether the child restraint is installed with the lower anchors or the vehicle seat belt.

1. Look behind the seating position where you plan to install the child restraint to find the tether anchorage. You may need to move the seat forward to provide better access to the tether anchorage. If there is no top tether anchorage for that seating position, move the child restraint to another position in the vehicle if one is available.
2. Rotate or lift the cover to access the anchor directly behind the seat where you are placing the child restraint.
3. Route the tether strap to provide the most direct path for the strap between the anchor and the child seat. If your vehicle is equipped with adjustable rear head restraints, raise the head restraint, and where possible, route the tether strap under the head restraint and between the two posts. If not possible, lower the head restraint and pass the tether strap around the outboard side of the head restraint.

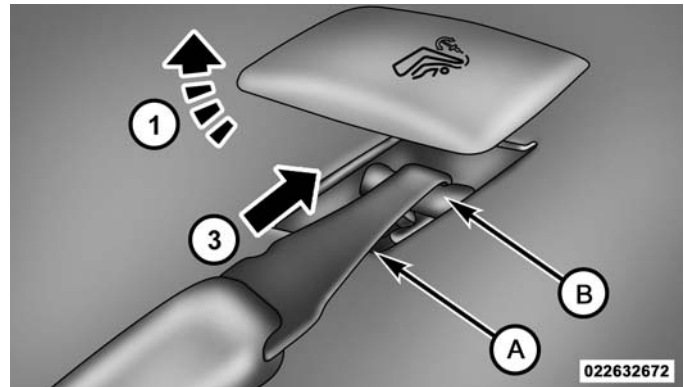

Tether Anchorages

- 1 — Cover
 3 — Attaching Strap
 A — Tether Strap Hook
 B — Tether Anchor


4. Attach the tether strap hook of the child restraint to the top tether anchorage as shown in the diagram.
5. Remove slack in the tether strap according to the child restraint manufacturer’s instructions.

WARNING!

- An incorrectly anchored tether strap could lead to increased head motion and possible injury to the child. Use only the anchorage position directly behind the child seat to secure a child restraint top tether strap.
- If your vehicle is equipped with a split rear seat, make sure the tether strap does not slip into the opening between the seatbacks as you remove slack in the strap.



Seat Belt Systems In Your Vehicle

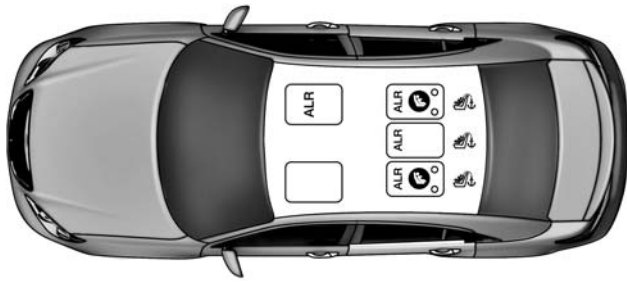Lap/Shoulder Belt Systems For Installing Child Restraints In This Vehicle



0226076774

2008–2013 Model Years

- ALR — Switchable Automatic Locking Retractor
-  Lower Anchorage Symbol (2 Anchorages Per Seating Position)
-  Top Tether Anchorage Symbol


Frequently Asked Questions About Seat Belts And Car Seats

What is the weight limit (child’s weight + weight of the child restraint) for using the Tether Anchor with the seat belt to attach a forward facing child restraint?	Weight limit of the Child Restraint	Always use the tether anchor when using the seat belt to install a forward facing child restraint, up to the recommended weight limit of the child restraint.
Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	Contact between the front passenger seat and the child restraint is allowed, if the child restraint manufacturer also allows contact.
Can the head restraints be removed?	No	
Can the buckle stalk be twisted to tighten the seat belt against the belt path of the child restraint?	No	Do not twist the buckle stalk in a seating position with an ALR retractor.

DODGE CALIBER, 2007–2012

LATCH And Tethers In Your Vehicle

LATCH Positions For Installing Child Restraints In This Vehicle

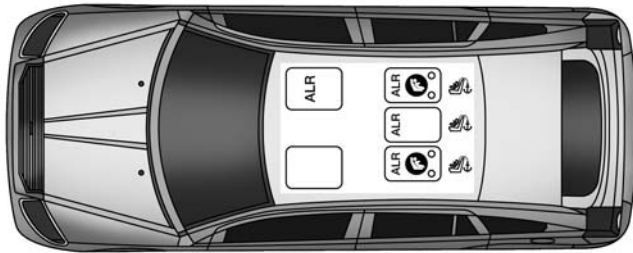


0226078366

2007–2012 Model Years

- ALR — Switchable Automatic Locking Retractor
- Lower Anchorage Symbol (2 Anchorages Per Seating Position)
- Top Tether Anchorage Symbol

Locating The LATCH Lower Anchorages In This Vehicle

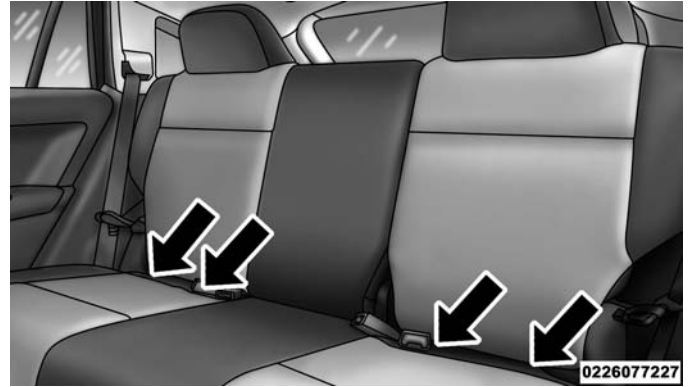


Rear Seat LATCH Lower Anchorages (2007–2012 Model Years)

Locating The Tether Anchorages In This Vehicle



There are tether strap anchorages behind each rear seating position located on the back of the seat.

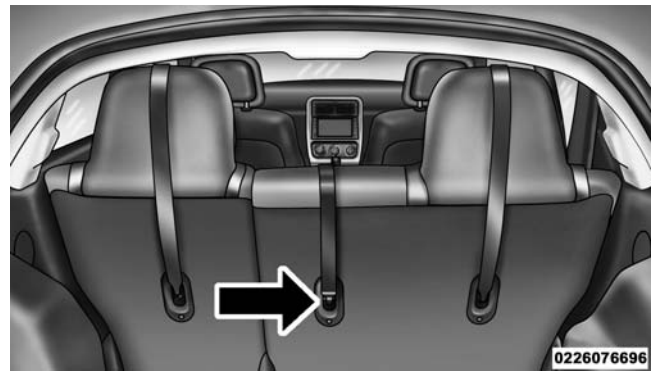

Tether Strap Anchorages (2007–2012 Model Years)

Frequently Asked Questions About LATCH

What is the weight limit (child’s weight + weight of the child restraint) for using the LATCH anchorage system to attach the child restraint?	65 lbs (29.5 kg)	Use the LATCH anchorage system until the combined weight of the child and the child restraint is 65 lbs (29.5 kg). Use the seat belt and tether anchor instead of the LATCH system once the combined weight is more than 65 lbs (29.5 kg).
Can a child seat be installed in the center position using the inner LATCH lower anchorages?	Yes	You can install child restraints with flexible lower anchors in the center position. The inner anchorages are 15.3 inches (390 mm) apart. Do not install child restraints with rigid lower anchors in the center position.
Can the LATCH anchorages and the seat belt be used together to attach a rear-facing or forward-facing child restraint?	No	Do not use the seat belt when you use the LATCH anchorage system to attach a rear-facing or forward-facing child restraint.
Can two child restraints be attached using a common lower LATCH anchorage?	No	Never “share” a LATCH anchorage with two or more child restraints. If the center position does not have dedicated LATCH lower anchorages, use the seat belt to install a child seat in the center position next to a child seat using the LATCH anchorages in an outboard position.

Frequently Asked Questions About LATCH		
2007 Model Year		
Can the rear-facing child restraint touch the back of the front passenger seat?	No	Contact between the front passenger seat and a child restraint can affect the passenger airbag suppression system. See your Owner's Manual for more information.
Can the head restraints be removed?	No	
2008–2012 Model Years		
Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	The child seat may touch the back of the front passenger seat if the child restraint manufacturer also allows contact. See your child restraint Owner's Manual for more information.
Can the head restraints be removed?	No	

Center Seat LATCH

Do not install child restraints with rigid lower attachments in the center seating position. Only install this type of child restraint in the outboard seating positions. Child restraints with flexible, webbing mounted lower attachments can be installed in any rear seating position.


WARNING!
<p>Never use the same lower anchorage to attach more than one child restraint. If you are installing LATCH-compatible child restraints next to each other, you must use the seat belt for the center position. You can then use either the LATCH anchors or the vehicle's seat belt for installing child seats in the outboard positions. Please refer to "Installing The LATCH-Compatible Child Restraint System" for typical installation instructions.</p>

Connecting The Top Tether Strap (With Either Lower Anchors Or Vehicle Seat Belt)

When installing a forward-facing child restraint, always secure the top tether strap, up to the tether anchor weight limit, whether the child restraint is installed with the lower anchors or the vehicle seat belt.

1. Look behind the seating position where you plan to install the child restraint to find the tether anchorage. You may need to move the seat forward to provide better access to the tether anchorage. If there is no top tether anchorage for that seating position, move the child restraint to another position in the vehicle if one is available.
2. Route the tether strap to provide the most direct path for the strap between the anchor and the child seat, routing it over the center of the head restraint.

3. Attach the tether strap hook of the child restraint to the top tether anchorage as shown in the diagram.

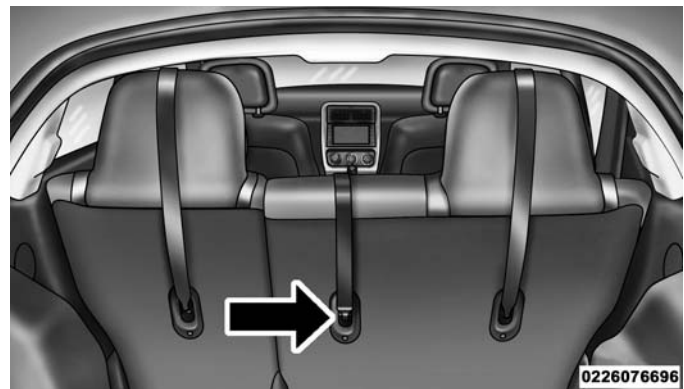


Tether Strap Anchorages (2007–2012 Model Years)

4. Remove slack in the tether strap according to the child restraint manufacturer's instructions.

WARNING!
<ul style="list-style-type: none"> • An incorrectly anchored tether strap could lead to increased head motion and possible injury to the child. Use only the anchorage position directly behind the child seat to secure a child restraint top tether strap. • If your vehicle is equipped with a split rear seat, make sure the tether strap does not slip into the opening between the seatbacks as you remove slack in the strap.

Seat Belt Systems In Your Vehicle

Lap/Shoulder Belt Systems For Installing Child Restraints In This Vehicle

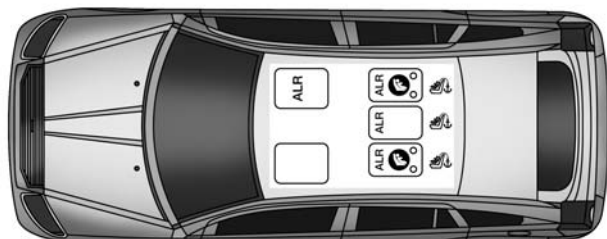

0226078366

2007–2012 Model Years

- ALR — Switchable Automatic Locking Retractor
- Lower Anchorage Symbol (2 Anchorages Per Seating Position)
- Top Tether Anchorage Symbol

Frequently Asked Questions About Seat Belts And Car Seats

2007 Model Year

What is the weight limit (child’s weight + weight of the child restraint) for using the Tether Anchor with the seat belt to attach a forward facing child restraint?	Weight limit of the Child Restraint	Always use the tether anchor when using the seat belt to install a forward facing child restraint, up to the recommended weight limit of the child restraint.
Can the rear-facing child restraint touch the back of the front passenger seat?	No	Contact between the front passenger seat and a child restraint can affect the passenger airbag suppression system. See your Owner’s Manual for more information.
Can the head restraints be removed?	No	
Can the buckle stalk be twisted to tighten the seat belt against the belt path of the child restraint?	No	Do not twist the buckle stalk in a seating position with an ALR retractor.


2008–2012 Model Years

What is the weight limit (child’s weight + weight of the child restraint) for using the Tether Anchor with the seat belt to attach a forward facing child restraint?	Weight limit of the Child Restraint	Always use the tether anchor when using the seat belt to install a forward facing child restraint, up to the recommended weight limit of the child restraint.
Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	Contact between the front passenger seat and the child restraint is allowed, if the child restraint manufacturer also allows contact.
Can the head restraints be removed?	No	
Can the buckle stalk be twisted to tighten the seat belt against the belt path of the child restraint?	No	Do not twist the buckle stalk in a seating position with an ALR retractor.

DODGE CHALLENGER, 2008–2013


LATCH And Tethers In Your Vehicle

LATCH Positions For Installing Child Restraints In This Vehicle

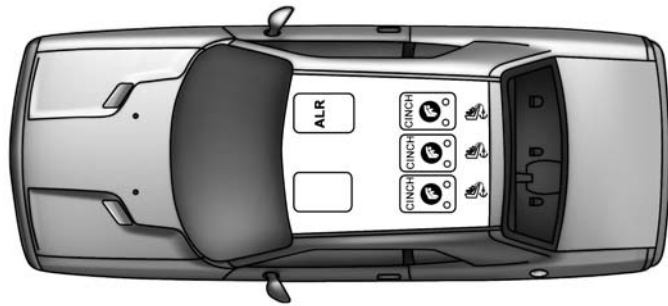



0226076776

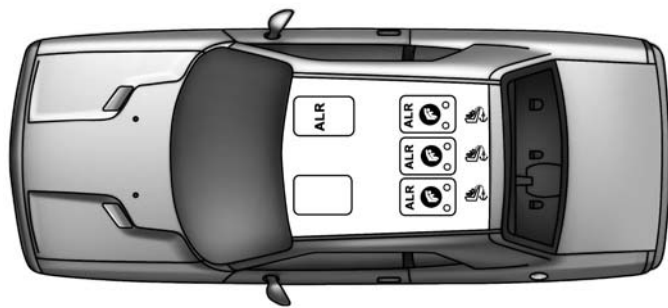2008–2010 Model Years




0226076777

2011–2013 Model Years

- ALR — Switchable Automatic Locking Retractor
- CINCH — Cinching Latch Plate
-  Lower Anchorage Symbol (2 Anchorages Per Seating Position)
-  Top Tether Anchorage Symbol

Locating The LATCH Lower Anchorages In This Vehicle

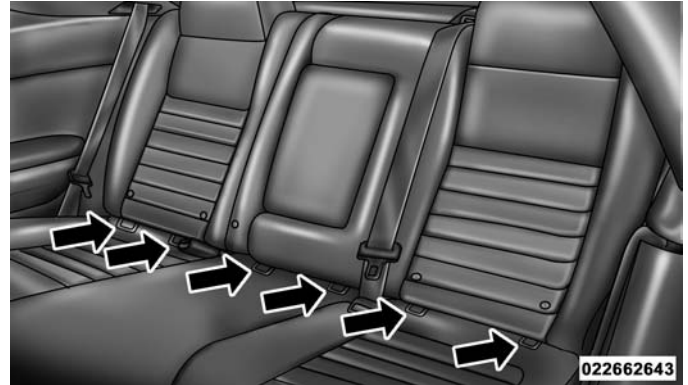


Rear Seat LATCH Lower Anchorages (2008–2013 Model Years)


Locating The Tether Anchorages In This Vehicle



There are tether strap anchorages behind each rear seating position located in the panel between the rear seatback and the rear window. They are found under a plastic cover with the tether anchorage symbol on it.

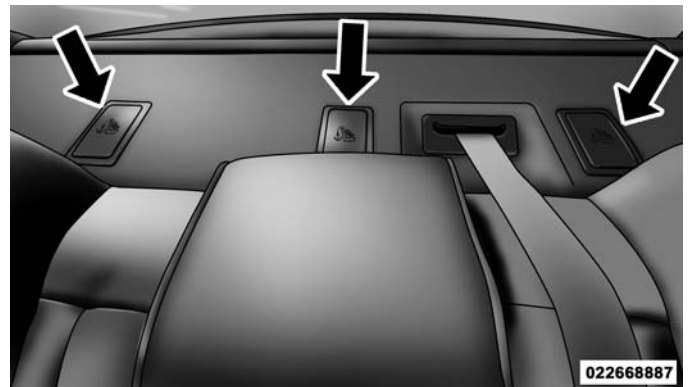

Tether Strap Anchorages

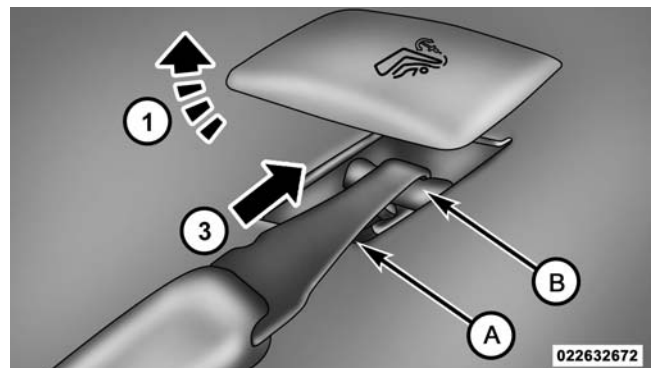

Tether Anchorages

- | | |
|---------------------|-----------------------|
| 1 — Cover | A — Tether Strap Hook |
| 3 — Attaching Strap | B — Tether Anchor |

Frequently Asked Questions About LATCH

What is the weight limit (child's weight + weight of the child restraint) for using the LATCH anchorage system to attach the child restraint?	65 lbs (29.5 kg)	Use the LATCH anchorage system until the combined weight of the child and the child restraint is 65 lbs (29.5 kg). Use the seat belt and tether anchor instead of the LATCH system once the combined weight is more than 65 lbs (29.5 kg).
Can the LATCH anchorages and the seat belt be used together to attach a rear-facing or forward-facing child restraint?	No	Do not use the seat belt when you use the LATCH anchorage system to attach a rear-facing or forward-facing child restraint.
Can two child restraints be attached using a common lower LATCH anchorage?	No	Never "share" a LATCH anchorage with two or more child restraints. If the center position does not have dedicated LATCH lower anchorages, use the seat belt to install a child seat in the center position next to a child seat using the LATCH anchorages in an outboard position.
Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	The child seat may touch the back of the front passenger seat if the child restraint manufacturer also allows contact. See your child restraint Owner's Manual for more information.
Can the head restraints be removed?	No	

Center Seat LATCH

If a child restraint installed in the center position blocks the seat belt webbing or buckle for the outboard position, do not use that outboard position. If a child seat in the center position blocks the outboard LATCH anchors or seat belt, do not install a child seat in that outboard position.

WARNING!


Never use the same lower anchorage to attach more than one child restraint. Please refer to "Installing The LATCH-Compatible Child Restraint System" for typical installation instructions.

Connecting The Top Tether Strap (With Either Lower Anchors Or Vehicle Seat Belt)

When installing a forward-facing child restraint, always secure the top tether strap, up to the tether anchor weight limit, whether the child restraint is installed with the lower anchors or the vehicle seat belt.

1. Look behind the seating position where you plan to install the child restraint to find the tether anchorage. You may need to move the seat forward to provide better access to the tether anchorage. If there is no top tether anchorage for that seating position, move the child restraint to another position in the vehicle if one is available.
2. Rotate or lift the cover to access the anchor directly behind the seat where you are placing the child restraint.

3. Route the tether strap to provide the most direct path for the strap between the anchor and the child seat. If your vehicle is equipped with adjustable rear head restraints, raise the head restraint, and where possible, route the tether strap under the head restraint and between the two posts. If not possible, lower the head restraint and pass the tether strap around the outboard side of the head restraint.

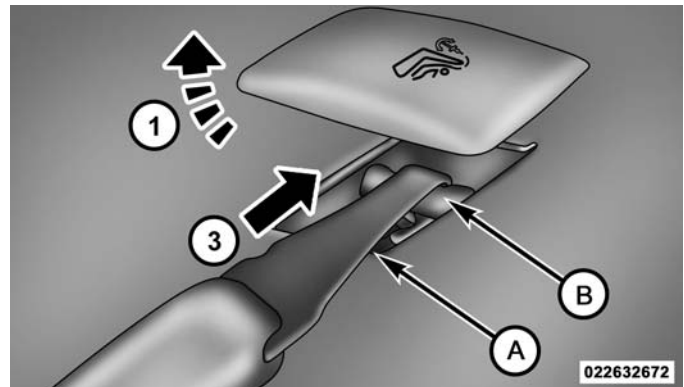


Tether Anchorages

- | | |
|---------------------|-----------------------|
| 1 — Cover | A — Tether Strap Hook |
| 3 — Attaching Strap | B — Tether Anchor |

4. Attach the tether strap hook of the child restraint to the top tether anchorage as shown in the diagram.
5. Remove slack in the tether strap according to the child restraint manufacturer's instructions.

WARNING!

- An incorrectly anchored tether strap could lead to increased head motion and possible injury to the child. Use only the anchorage position directly behind the child seat to secure a child restraint top tether strap.
- If your vehicle is equipped with a split rear seat, make sure the tether strap does not slip into the opening between the seatbacks as you remove slack in the strap.

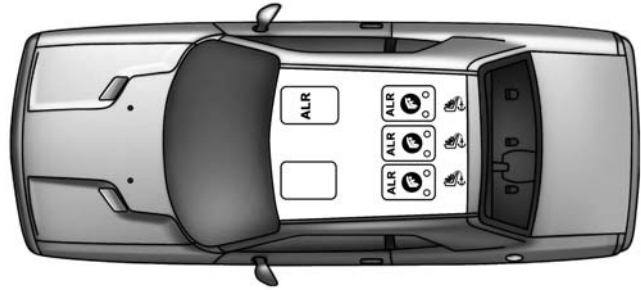


0226076777

2011–2013 Model Years

- ALR — Switchable Automatic Locking Retractor
- CINCH — Cinching Latch Plate
- Lower Anchorage Symbol (2 Anchorages Per Seating Position)
- Top Tether Anchorage Symbol

Seat Belt Systems In Your Vehicle

Lap/Shoulder Belt Systems For Installing Child Restraints In This Vehicle

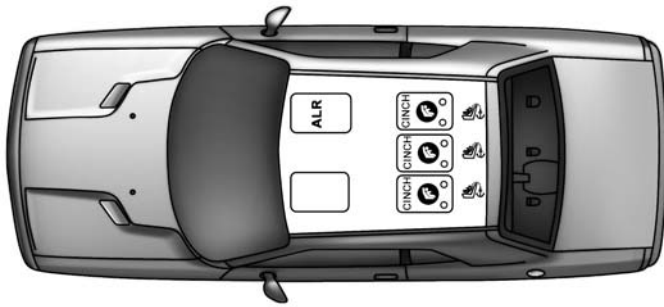

0226076776

2008–2010 Model Years


Frequently Asked Questions About Seat Belts And Car Seats

What is the weight limit (child’s weight + weight of the child restraint) for using the Tether Anchor with the seat belt to attach a forward facing child restraint?	Weight limit of the Child Restraint	Always use the tether anchor when using the seat belt to install a forward facing child restraint, up to the recommended weight limit of the child restraint.
Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	Contact between the front passenger seat and the child restraint is allowed, if the child restraint manufacturer also allows contact.
Can the head restraints be removed?	No	
2008–2010 Model Years		
Can the buckle stalk be twisted to tighten the seat belt against the belt path of the child restraint?	Yes	In positions with cinching latch plates (CINCH), the buckle stalk may be twisted up to 3 full turns. Do not twist the buckle stalk in a seating position with an ALR retractor.
2011–2013 Model Years		
Can the buckle stalk be twisted to tighten the seat belt against the belt path of the child restraint?	No	Do not twist the buckle stalk in a seating position with an ALR retractor.

DODGE CHARGER, 2006–2013


LATCH And Tethers In Your Vehicle

LATCH Positions For Installing Child Restraints In This Vehicle

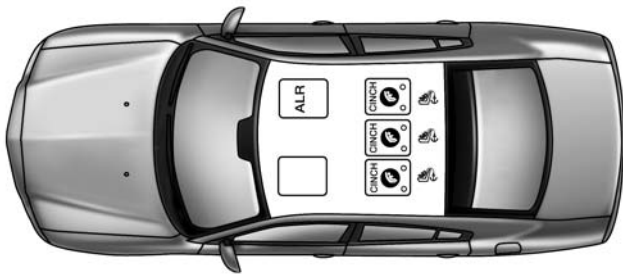

0226077513

2006–2010 Model Years

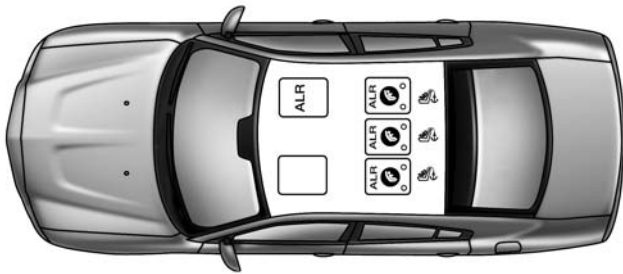


0226077507

2011–2013 Model Years

- ALR — Switchable Automatic Locking Retractor
- CINCH — Cinching Latch Plate
- Lower Anchorage Symbol (2 Anchorages Per Seating Position)
- Top Tether Anchorage Symbol

Locating The LATCH Lower Anchorages In This Vehicle

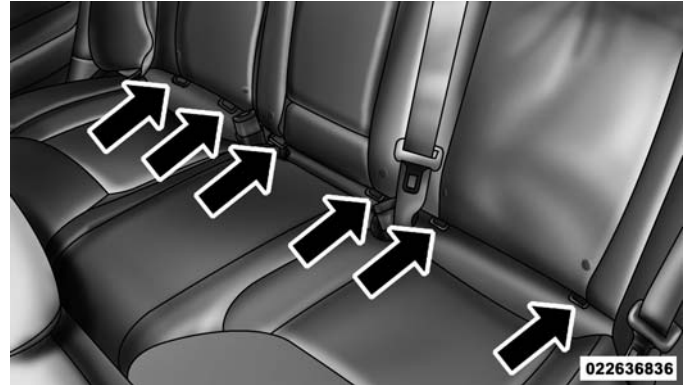


Rear Seat LATCH Lower Anchorages (2006–2013 Model Years)

Locating The Tether Anchorages In This Vehicle



There are tether strap anchorages behind each rear seating position located in the panel between the rear seatback and the rear window. They are found under a plastic cover with the tether anchorage symbol on it.

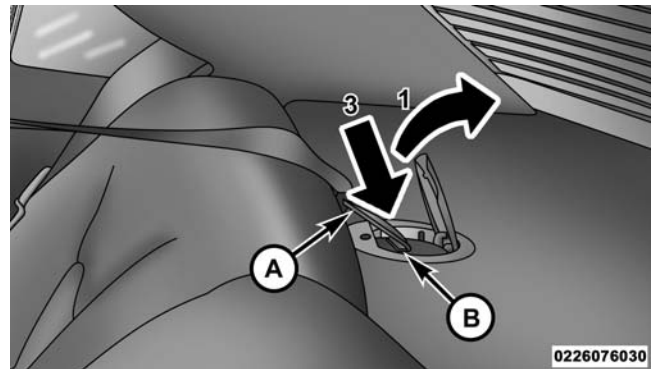

Tether Strap Anchorages (2006–2013 Model Years)

- 1 — Cover
- 3 — Attaching Strap
- A — Tether Strap Hook
- B — Tether Anchor

Frequently Asked Questions About LATCH

What is the weight limit (child’s weight + weight of the child restraint) for using the LATCH anchorage system to attach the child restraint?	65 lbs (29.5 kg)	Use the LATCH anchorage system until the combined weight of the child and the child restraint is 65 lbs (29.5 kg). Use the seat belt and tether anchor instead of the LATCH system once the combined weight is more than 65 lbs (29.5 kg).
Can the LATCH anchorages and the seat belt be used together to attach a rear-facing or forward-facing child restraint?	No	Do not use the seat belt when you use the LATCH anchorage system to attach a rear-facing or forward-facing child restraint.
Can two child restraints be attached using a common lower LATCH anchorage?	No	Never “share” a LATCH anchorage with two or more child restraints.

Frequently Asked Questions About LATCH		
2006 Model Year		
Can the rear-facing child restraint touch the back of the front passenger seat?	No	Contact between the front passenger seat and a child restraint can affect the passenger airbag suppression system. See your Owner's Manual for more information.
Can the head restraints be removed?	No	
2007–2010 Model Years		
Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	The child seat may touch the back of the front passenger seat if the child restraint manufacturer also allows contact. See your child restraint Owner's Manual for more information.
Can the head restraints be removed?	No	
2011–2013 Model Years		
Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	The child seat may touch the back of the front passenger seat if the child restraint manufacturer also allows contact. See your child restraint Owner's Manual for more information.
Can the head restraints be removed?	Yes	Center Only.

Center Seat LATCH


If a child restraint installed in the center position blocks the seat belt webbing or buckle for the outboard position, do not use that outboard position. If a child seat in the center position blocks the outboard LATCH anchors or seat belt, do not install a child seat in that outboard position.

WARNING!
Never use the same lower anchorage to attach more than one child restraint. Please refer to "Installing The LATCH-Compatible Child Restraint System" for typical installation instructions.

Connecting The Top Tether Strap (With The Vehicle Seat Belt)

When installing a forward-facing child restraint, always secure the top tether strap, up to the tether anchor weight limit.

1. Look behind the seating position where you plan to install the child restraint to find the tether anchorage. You may need to move the seat forward to provide better access to the tether anchorage. If there is no top tether anchorage for that seating position, move the child restraint to another position in the vehicle if one is available.
2. Rotate or lift the cover to access the anchor directly behind the seat where you are placing the child restraint.
3. Route the tether strap to provide the most direct path for the strap between the anchor and the child seat. If your vehicle is equipped with adjustable rear head restraints, raise the head restraint, and where possible, route the tether strap under the head restraint and between the two posts. If not possible, lower the head restraint and pass the tether strap around the outboard side of the head restraint.

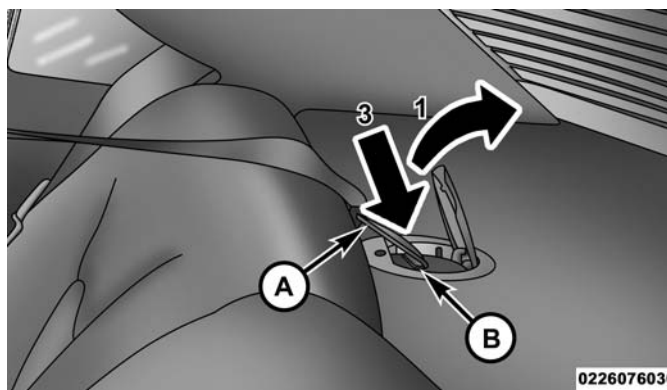

Tether Strap Anchorages

- | | |
|---------------------|-----------------------|
| 1 — Cover | A — Tether Strap Hook |
| 3 — Attaching Strap | B — Tether Anchor |

4. Attach the tether strap hook of the child restraint to the top tether anchorage as shown in the diagram.
5. Remove slack in the tether strap according to the child restraint manufacturer's instructions.

WARNING!
<ul style="list-style-type: none"> • An incorrectly anchored tether strap could lead to increased head motion and possible injury to the child. Use only the anchorage position directly behind the child seat to secure a child restraint top tether strap. • If your vehicle is equipped with a split rear seat, make sure the tether strap does not slip into the opening between the seatbacks as you remove slack in the strap.


Center Tether Attachment (2011-2013 Model Year):

1. Lower the adjustable center head restraint to the full down position.
2. Route the tether strap over the seatback and head restraint.

3. Attach the tether strap hook of the child restraint to the center tether anchorage located in the panel between the rear seatback and the rear window.
4. Remove slack in the tether strap according to the child restraint manufacturer’s instructions.

Seat Belt Systems In Your Vehicle


Lap/Shoulder Belt Systems For Installing Child Restraints In This Vehicle

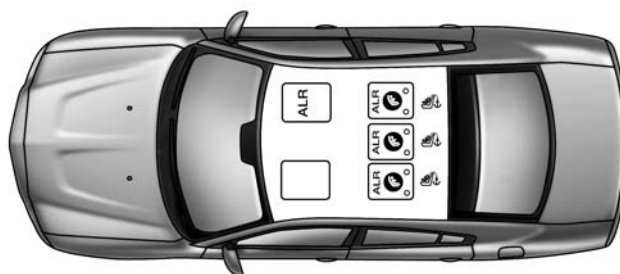

0226077507

2011–2013 Model Years

- ALR — Switchable Automatic Locking Retractor
- CINCH — Cinching Latch Plate
- Lower Anchorage Symbol (2 Anchorages Per Seating Position)
- Top Tether Anchorage Symbol

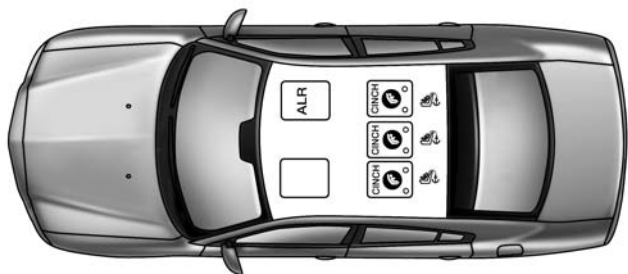

0226077513

2006–2010 Model Years


Frequently Asked Questions About Seat Belts And Car Seats

What is the weight limit (child’s weight + weight of the child restraint) for using the Tether Anchor with the seat belt to attach a forward facing child restraint?	Weight limit of the Child Restraint	Always use the tether anchor when using the seat belt to install a forward facing child restraint, up to the recommended weight limit of the child restraint.
2006 Model Year		
Can the rear-facing child restraint touch the back of the front passenger seat?	No	Contact between the front passenger seat and a child restraint can affect the passenger airbag suppression system. See your Owner’s Manual for more information.
Can the head restraints be removed?	No	
Can the buckle stalk be twisted to tighten the seat belt against the belt path of the child restraint?	Yes	In positions with cinching latch plates (CINCH), the buckle stalk may be twisted up to 3 full turns. Do not twist the buckle stalk in a seating position with an ALR retractor.
2007–2010 Model Years		
Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	Contact between the front passenger seat and the child restraint is allowed, if the child restraint manufacturer also allows contact.
Can the head restraints be removed?	No	
Can the buckle stalk be twisted to tighten the seat belt against the belt path of the child restraint?	Yes	In positions with cinching latch plates (CINCH), the buckle stalk may be twisted up to 3 full turns. Do not twist the buckle stalk in a seating position with an ALR retractor.
2011–2013 Model Years		
Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	Contact between the front passenger seat and the child restraint is allowed, if the child restraint manufacturer also allows contact.
Can the head restraints be removed?	Yes	Center only.
Can the buckle stalk be twisted to tighten the seat belt against the belt path of the child restraint?	No	Do not twist the buckle stalk in a seating position with an ALR retractor.

DODGE DART, 2013

LATCH And Tethers In Your Vehicle

LATCH Positions For Installing Child Restraints In This Vehicle

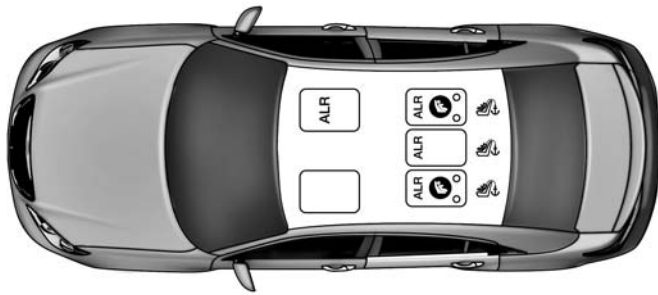


0226076774

2013 Model Year

- ALR — Switchable Automatic Locking Retractor
- Lower Anchorage Symbol (2 Anchorages Per Seating Position)
- Top Tether Anchorage Symbol

Locating The LATCH Lower Anchorages In This Vehicle

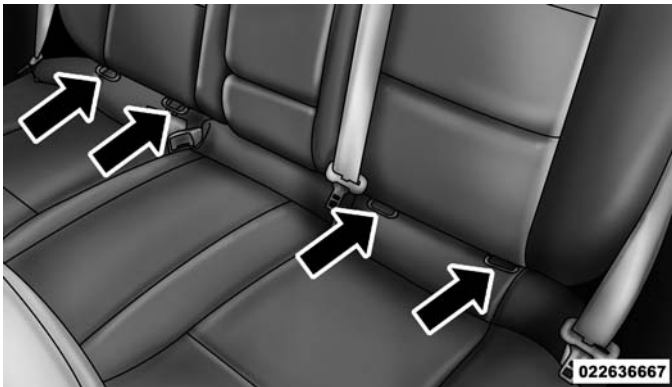


022636667

Rear Seat LATCH Lower Anchorages (2013 Model Year)

Locating The Tether Anchorages In This Vehicle




There are tether strap anchorages behind each rear seating position located in the panel between the rear seatback and the rear window. They are found under a plastic cover with the tether anchorage symbol on it.

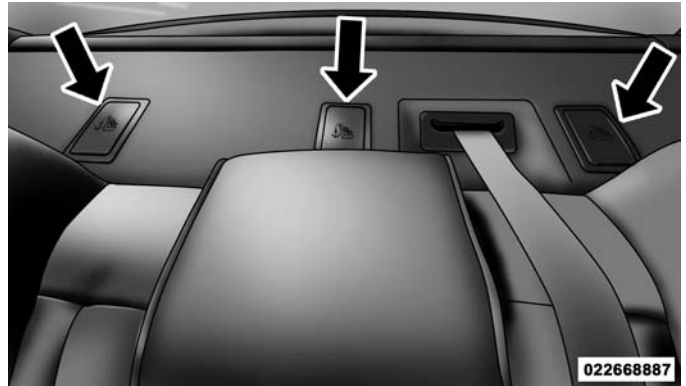

022668887

Tether Strap Anchorages

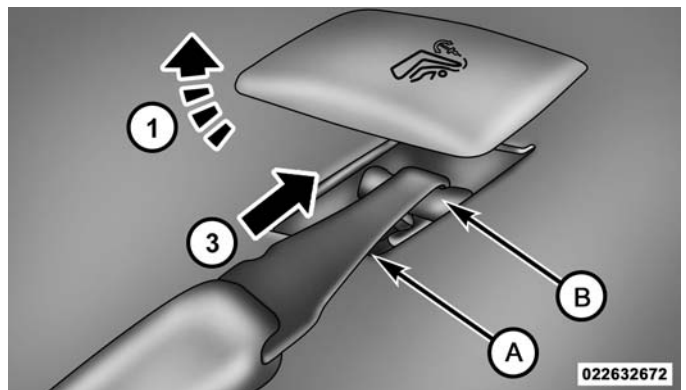

022632672

Tether Strap Mounting

- 1 — Cover
- 3 — Attaching Strap
- A — Tether Strap Hook
- B — Tether Anchor

Frequently Asked Questions About LATCH

What is the weight limit (child's weight + weight of the child restraint) for using the LATCH anchorage system to attach the child restraint?	65 lbs (29.5 kg)	Use the LATCH anchorage system until the combined weight of the child and the child restraint is 65 lbs (29.5 kg). Use the seat belt and tether anchor instead of the LATCH system once the combined weight is more than 65 lbs (29.5 kg).
Can a child seat be installed in the center position using the inner LATCH lower anchorages?	Yes	You can install child restraints with flexible lower anchors in the center position. The inner anchorages are 17.3 inches (440 mm) apart. Do not install child restraints with rigid lower anchors in the center position.
Can the LATCH anchorages and the seat belt be used together to attach a rear-facing or forward-facing child restraint?	No	Do not use the seat belt when you use the LATCH anchorage system to attach a rear-facing or forward-facing child restraint.

Frequently Asked Questions About LATCH

Can two child restraints be attached using a common lower LATCH anchorage?	No	Never “share” a LATCH anchorage with two or more child restraints. If the center position does not have dedicated LATCH lower anchorages, use the seat belt to install a child seat in the center position next to a child seat using the LATCH anchorages in an outboard position.
Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	The child seat may touch the back of the front passenger seat if the child restraint manufacturer also allows contact. See your child restraint Owner’s Manual for more information.
Can the head restraints be removed?	Yes	Yes, all may be removed.

Center Seat LATCH

Do not install child restraints with rigid lower attachments in the center seating position. Only install this type of child restraint in the outboard seating positions. Child restraints with flexible, webbing mounted lower attachments can be installed in any rear seating position.


WARNING!

Never use the same lower anchorage to attach more than one child restraint. If you are installing LATCH-compatible child restraints next to each other, you must use the seat belt for the center position. You can then use either the LATCH anchors or the vehicle’s seat belt for installing child seats in the outboard positions. Please refer to “Installing The LATCH-Compatible Child Restraint System” for typical installation instructions.

Connecting The Top Tether Strap (With Either Lower Anchors Or Vehicle Seat Belt)

When installing a forward-facing child restraint, always secure the top tether strap, up to the tether anchor weight limit, whether the child restraint is installed with the lower anchors or the vehicle seat belt.

1. Look behind the seating position where you plan to install the child restraint to find the tether anchorage. You may need to move the seat forward to provide better access to the tether anchorage. If there is no top tether anchorage for that seating position, move the child restraint to another position in the vehicle if one is available.
2. Rotate or lift the cover to access the anchor directly behind the seat where you are placing the child restraint.
3. Route the tether strap to provide the most direct path for the strap between the anchor and the child seat. If your vehicle is equipped with adjustable rear head restraints, raise the head restraint, and where possible, route the tether strap under the head restraint and between the two posts. If not possible, lower the head restraint and pass the tether strap around the outboard side of the head restraint.

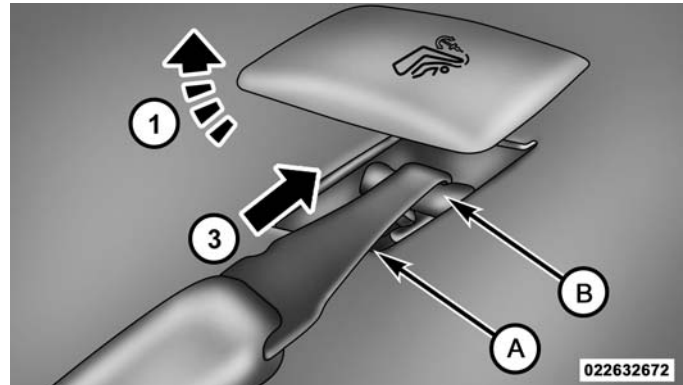

Tether Anchorages

- 1 — Cover
 3 — Attaching Strap
 A — Tether Strap Hook
 B — Tether Anchor


4. Attach the tether strap hook of the child restraint to the top tether anchorage as shown in the diagram.
5. Remove slack in the tether strap according to the child restraint manufacturer’s instructions.

WARNING!

- An incorrectly anchored tether strap could lead to increased head motion and possible injury to the child. Use only the anchorage position directly behind the child seat to secure a child restraint top tether strap.
- If your vehicle is equipped with a split rear seat, make sure the tether strap does not slip into the opening between the seatbacks as you remove slack in the strap.



Seat Belt Systems In Your Vehicle

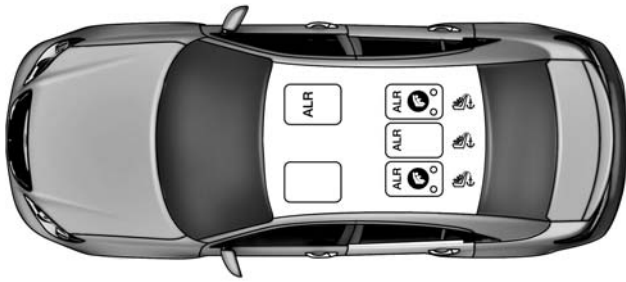Lap/Shoulder Belt Systems For Installing Child Restraints In This Vehicle



0226076774

2013 Model Year

- ALR — Switchable Automatic Locking Retractor
-  Lower Anchorage Symbol (2 Anchorages Per Seating Position)
-  Top Tether Anchorage Symbol


Frequently Asked Questions About Seat Belts And Car Seats

What is the weight limit (child's weight + weight of the child restraint) for using the Tether Anchor with the seat belt to attach a forward facing child restraint?	Weight limit of the Child Restraint	Always use the tether anchor when using the seat belt to install a forward facing child restraint, up to the recommended weight limit of the child restraint.
Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	Contact between the front passenger seat and the child restraint is allowed, if the child restraint manufacturer also allows contact.
Can the head restraints be removed?	Yes	All head restraints may be removed.
Can the buckle stalk be twisted to tighten the seat belt against the belt path of the child restraint?	No	Do not twist the buckle stalk in a seating position with an ALR retractor.

DODGE INTREPID, 2000–2003


LATCH And Tethers In Your Vehicle

LATCH Positions For Installing Child Restraints In This Vehicle

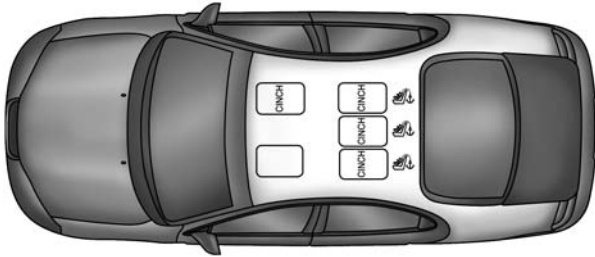


0226077505

2000–2001 Model Years (Front Bucket Seats)

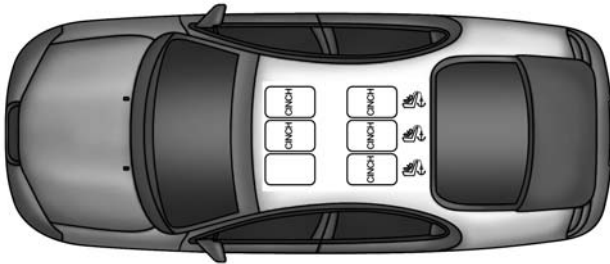


0226079258

2000–2001 Model Years (Front Bench Seat)

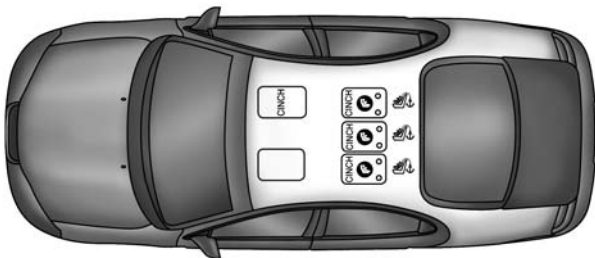

0226077506

2002–2003 Model Years (Front Bucket Seats)

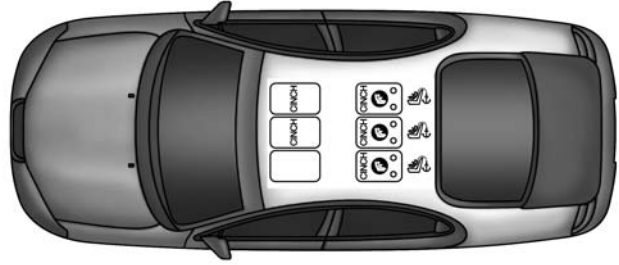

0226079259

2002–2003 Model Years (Front Bench Seat)


- CINCH — Cinching Latch Plate
- Lower Anchorage Symbol (2 Anchorages Per Seating Position)
- Top Tether Anchorage Symbol

Locating The LATCH Lower Anchorages In This Vehicle



0226078115

Rear Seat Has No LATCH Lower Anchorages (2000–2001 Model Years)

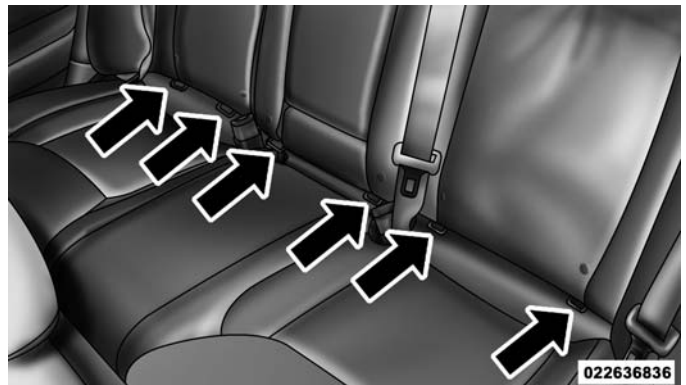


022636836

Rear Seat LATCH Lower Anchorages (2002–2003 Model Years)

Locating The Tether Anchorages In This Vehicle



There are tether strap anchorages behind each rear seating position located in the panel between the rear seatback and the rear window. They are found under a plastic cover with the tether anchorage symbol on it.

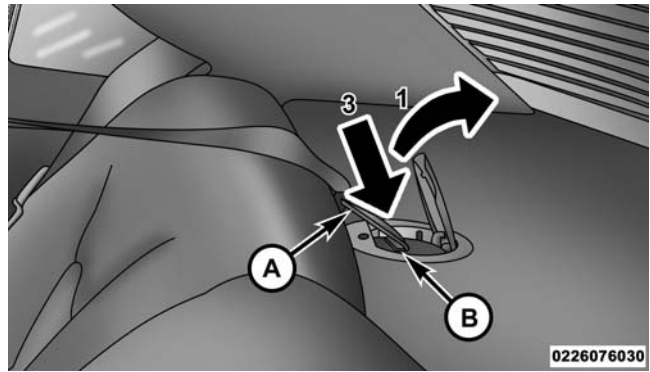

Tether Strap Anchorages (2000–2003 Model Years)

- 1 — Cover
- 3 — Attaching Strap
- A — Tether Strap Hook
- B — Tether Anchor

Frequently Asked Questions About LATCH		
2000–2001 Model Years (No Lower Anchorages)		
2002–2003 Model Years		
What is the weight limit (child’s weight + weight of the child restraint) for using the LATCH anchorage system to attach the child restraint?	65 lbs (29.5 kg)	Use the LATCH anchorage system until the combined weight of the child and the child restraint is 65 lbs (29.5 kg). Use the seat belt alone instead of the LATCH anchorage system once the combined weight is more than 65 lbs (29.5 kg).
Can the LATCH anchorages and the seat belt be used together to attach a rear-facing or forward-facing child restraint?	No	Do not use the seat belt when you use the LATCH anchorage system to attach a rear-facing or forward-facing child restraint.
Can two child restraints be attached using a common lower LATCH anchorage?	No	Never “share” a LATCH anchorage with two or more child restraints.
Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	The child seat may touch the back of the front passenger seat if the child restraint manufacturer also allows contact. See your child restraint Owner’s Manual for more information.
Can the head restraints be removed?	No	

Center Seat LATCH

2002–2003 Model Years

If a child restraint installed in the center position blocks the seat belt webbing or buckle for the outboard position, do not use that outboard position. If a child seat in the center position blocks the outboard LATCH anchors or seat belt, do not install a child seat in that outboard position.

WARNING!


Never use the same lower anchorage to attach more than one child restraint. Please refer to “Installing The LATCH-Compatible Child Restraint System” for typical installation instructions.

Connecting The Top Tether Strap (With The Vehicle Seat Belt)

When installing a forward-facing child restraint, always secure the top tether strap, up to the tether anchor weight limit.

1. Look behind the seating position where you plan to install the child restraint to find the tether anchorage. You may need to move the seat forward to provide better access to the tether anchorage. If there is no top tether anchorage for that seating position, move the child restraint to another position in the vehicle if one is available.
2. Rotate or lift the cover to access the anchor directly behind the seat where you are placing the child restraint.

3. Route the tether strap to provide the most direct path for the strap between the anchor and the child seat. If your vehicle is equipped with adjustable rear head restraints, raise the head restraint, and where possible, route the tether strap under the head restraint and between the two posts. If not possible, lower the head restraint and pass the tether strap around the outboard side of the head restraint.

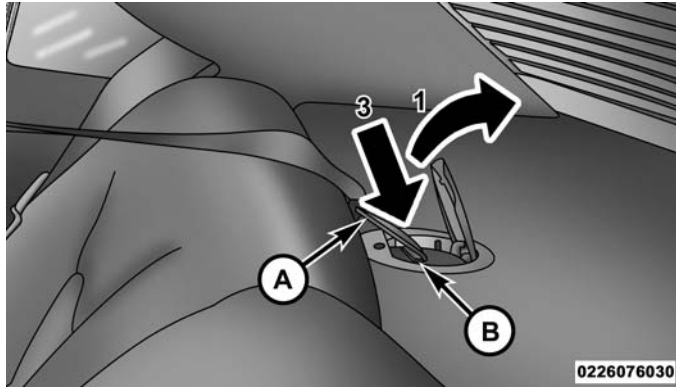

Tether Strap Anchorages

- | | |
|---------------------|-----------------------|
| 1 — Cover | A — Tether Strap Hook |
| 3 — Attaching Strap | B — Tether Anchor |


- Attach the tether strap hook of the child restraint to the top tether anchorage as shown in the diagram.
- Remove slack in the tether strap according to the child restraint manufacturer's instructions.

WARNING!

- An incorrectly anchored tether strap could lead to increased head motion and possible injury to the child. Use only the anchorage position directly behind the child seat to secure a child restraint top tether strap.
- If your vehicle is equipped with a split rear seat, make sure the tether strap does not slip into the opening between the seatbacks as you remove slack in the strap.


Seat Belt Systems In Your Vehicle

Lap/Shoulder Belt Systems For Installing Child Restraints In This Vehicle

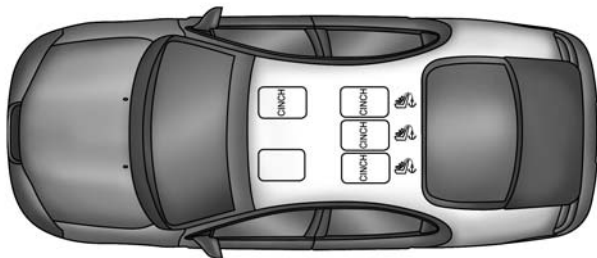


0226077505

2000–2001 Model Years (Front Bucket Seats)

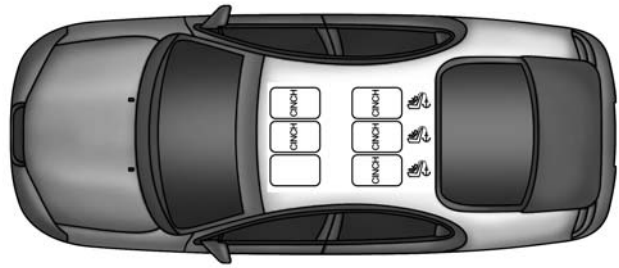


0226079258

2000–2001 Model Years (Front Bench Seat)

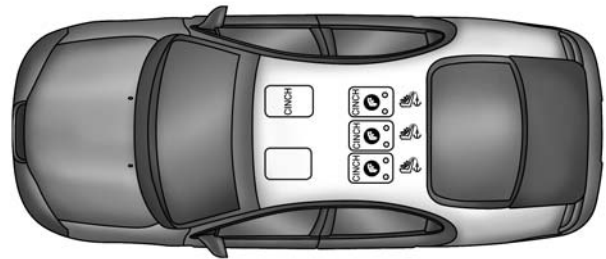

0226077506

2002–2003 Model Years (Front Bucket Seats)

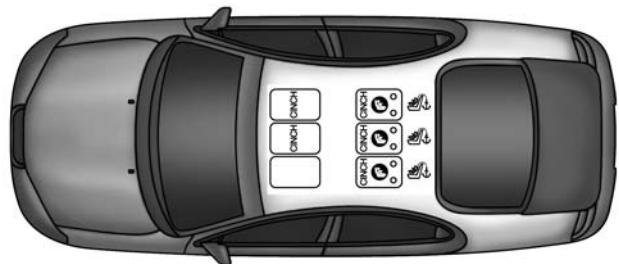

0226079259

2002–2003 Model Years (Front Bench Seat)

- CINCH — Cinching Latch Plate
- Lower Anchorage Symbol (2 Anchorages Per Seating Position)
- Top Tether Anchorage Symbol


Frequently Asked Questions About Seat Belts And Car Seats

<p>What is the weight limit (child’s weight + weight of the child restraint) for using the Tether Anchor with the seat belt to attach a forward facing child restraint?</p>	<p>65 lbs (29.5 kg)</p>	<p>The Tether Anchor can be used with the seat belt until the combined weight of the child and the child restraint is 65 lbs (29.5 kg). Use the seat belt without the Tether Anchor once the combined weight is more than 65 lbs (29.5 kg).</p>
<p>Can the rear-facing child restraint touch the back of the front passenger seat?</p>	<p>Yes</p>	<p>Contact between the front passenger seat and the child restraint is allowed, if the child restraint manufacturer also allows contact.</p>
<p>Can the head restraints be removed?</p>	<p>No</p>	
<p>Can the buckle stalk be twisted to tighten the seat belt against the belt path of the child restraint?</p>	<p>Yes</p>	<p>In positions with cinching latch plates (CINCH), the buckle stalk may be twisted up to 3 full turns.</p>

DODGE MAGNUM, 2005–2008



LATCH And Tethers In Your Vehicle

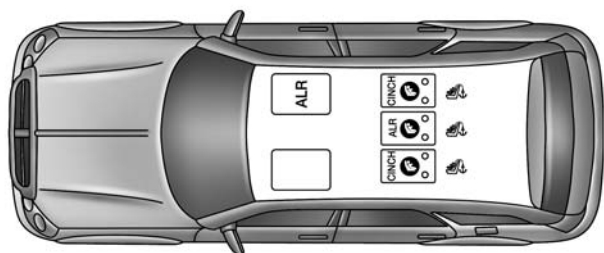LATCH Positions For Installing Child Restraints In This Vehicle




0226077518

2005–2008 Model Years

- ALR — Switchable Automatic Locking Retractor
- CINCH — Cinching Latch Plate
-  Lower Anchorage Symbol (2 Anchorages Per Seating Position)
-  Top Tether Anchorage Symbol

Locating The LATCH Lower Anchorages In This Vehicle

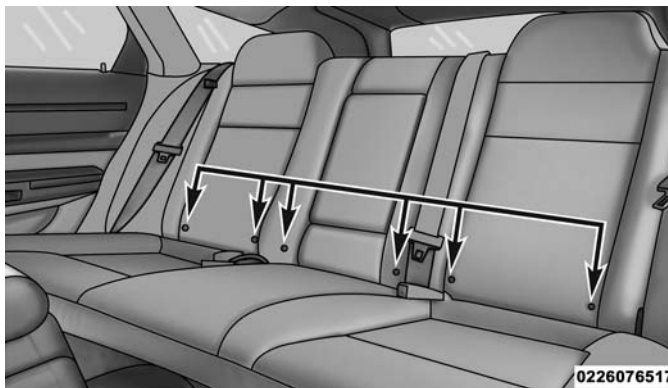


Rear Seat LATCH Lower Anchorages
(2005–2008 Model Years)

Locating The Tether Anchorages In This Vehicle



There are tether strap anchorages behind each rear seating position located on the back of the seat.

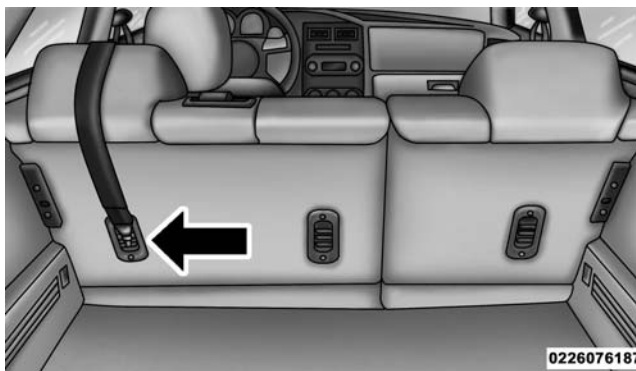

Rear Seat Tether Strap Anchorages
(2005–2008 Model Years)

Frequently Asked Questions About LATCH

What is the weight limit (child’s weight + weight of the child restraint) for using the LATCH anchorage system to attach the child restraint?	65 lbs (29.5 kg)	Use the LATCH anchorage system until the combined weight of the child and the child restraint is 65 lbs (29.5 kg). Use the seat belt alone instead of the LATCH anchorage system once the combined weight is more than 65 lbs (29.5 kg).
Can the LATCH anchorages and the seat belt be used together to attach a rear-facing or forward-facing child restraint?	No	Do not use the seat belt when you use the LATCH anchorage system to attach a rear-facing or forward-facing child restraint.
Can two child restraints be attached using a common lower LATCH anchorage?	No	Never “share” a LATCH anchorage with two or more child restraints.
2005–2006 Model Years		
Can the rear-facing child restraint touch the back of the front passenger seat?	No	Contact between the front passenger seat and a child restraint can affect the passenger airbag suppression system. See your Owner’s Manual for more information.
Can the head restraints be removed?	No	

Frequently Asked Questions About LATCH

2007–2008 Model Years

Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	The child seat may touch the back of the front passenger seat if the child restraint manufacturer also allows contact. See your child restraint Owner’s Manual for more information.
Can the head restraints be removed?	No	

Center Seat LATCH

If a child restraint installed in the center position blocks the seat belt webbing or buckle for the outboard position, do not use that outboard position. If a child seat in the center position blocks the outboard LATCH anchors or seat belt, do not install a child seat in that outboard position.


WARNING!

Never use the same lower anchorage to attach more than one child restraint. Please refer to “Installing The LATCH-Compatible Child Restraint System” for typical installation instructions.

Connecting The Top Tether Strap (With Either Lower Anchors Or Vehicle Seat Belt)

When installing a forward-facing child restraint, always secure the top tether strap, up to the tether anchor weight limit, whether the child restraint is installed with the lower anchors or the vehicle seat belt.

1. Look behind the seating position where you plan to install the child restraint to find the tether anchorage. You may need to move the seat forward to provide better access to the tether anchorage. If there is no top tether anchorage for that seating position, move the child restraint to another position in the vehicle if one is available.
2. Route the tether strap to provide the most direct path for the strap between the anchor and the child seat, routing it over the center of the head restraint.
3. Attach the tether strap hook of the child restraint to the top tether anchorage as shown in the diagram.

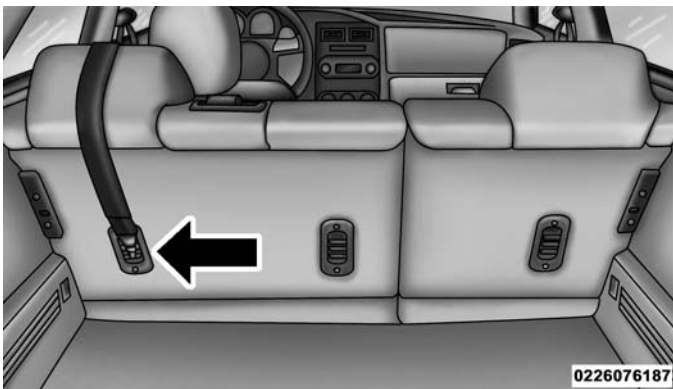

Rear Seat Tether Strap Mounting (2005–2008 Model Years)


4. Remove slack in the tether strap according to the child restraint manufacturer’s instructions.

WARNING!

- An incorrectly anchored tether strap could lead to increased head motion and possible injury to the child. Use only the anchorage position directly behind the child seat to secure a child restraint top tether strap.
- If your vehicle is equipped with a split rear seat, make sure the tether strap does not slip into the opening between the seatbacks as you remove slack in the strap.

Seat Belt Systems In Your Vehicle

Lap/Shoulder Belt Systems For Installing Child Restraints In This Vehicle

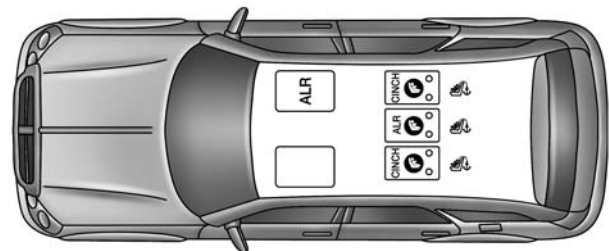

0226077518

- ALR — Switchable Automatic Locking Retractor
- CINCH — Cinching Latch Plate
- Lower Anchorage Symbol (2 Anchorages Per Seating Position)
- Top Tether Anchorage Symbol

Frequently Asked Questions About Seat Belts And Car Seats


2005–2006 Model Years

What is the weight limit (child's weight + weight of the child restraint) for using the Tether Anchor with the seat belt to attach a forward facing child restraint?	65 lbs (29.5 kg)	The Tether Anchor can be used with the seat belt until the combined weight of the child and the child restraint is 65 lbs (29.5 kg). Use the seat belt without the Tether Anchor once the combined weight is more than 65 lbs (29.5 kg).
Can the rear-facing child restraint touch the back of the front passenger seat?	No	Contact between the front passenger seat and a child restraint can affect the passenger airbag suppression system. See your Owner's Manual for more information.
Can the head restraints be removed?	No	
Can the buckle stalk be twisted to tighten the seat belt against the belt path of the child restraint?	Yes	In positions with cinching latch plates (CINCH), the buckle stalk may be twisted up to 3 full turns. Do not twist the buckle stalk in a seating position with an ALR retractor.
2007–2008 Model Years		
What is the weight limit (child's weight + weight of the child restraint) for using the Tether Anchor with the seat belt to attach a forward facing child restraint?	65 lbs (29.5 kg)	The Tether Anchor can be used with the seat belt until the combined weight of the child and the child restraint is 65 lbs (29.5 kg). Use the seat belt without the Tether Anchor once the combined weight is more than 65 lbs (29.5 kg).
Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	Contact between the front passenger seat and the child restraint is allowed, if the child restraint manufacturer also allows contact.
Can the head restraints be removed?	No	
Can the buckle stalk be twisted to tighten the seat belt against the belt path of the child restraint?	Yes	In positions with cinching latch plates (CINCH), the buckle stalk may be twisted up to 3 full turns. Do not twist the buckle stalk in a seating position with an ALR retractor.

DODGE NEON, 2000–2005


LATCH And Tethers In Your Vehicle

LATCH Positions For Installing Child Restraints In This Vehicle

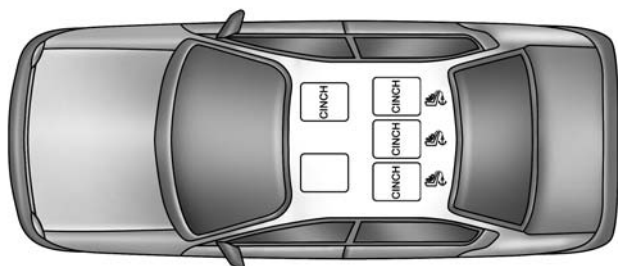

0226077520

2000–2001 Model Years

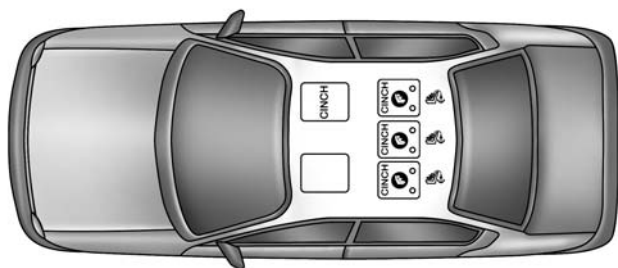

0226077523

2002–2005 Model Years

- CINCH — Cinching Latch Plate
- Lower Anchorage Symbol (2 Anchorages Per Seating Position)
- Top Tether Anchorage Symbol

Locating The LATCH Lower Anchorages In This Vehicle



0226078116

Rear Seat Has No LATCH Lower Anchorages (2000–2001 Model Years)




0226077038

Rear Seat LATCH Lower Anchorages (2002–2005 Model Years)

Locating The Tether Anchorages In This Vehicle



There are tether strap anchorages behind each rear seating position located in the panel between the rear seatback and the rear window. They are found under a plastic cover with the tether anchorage symbol on it.

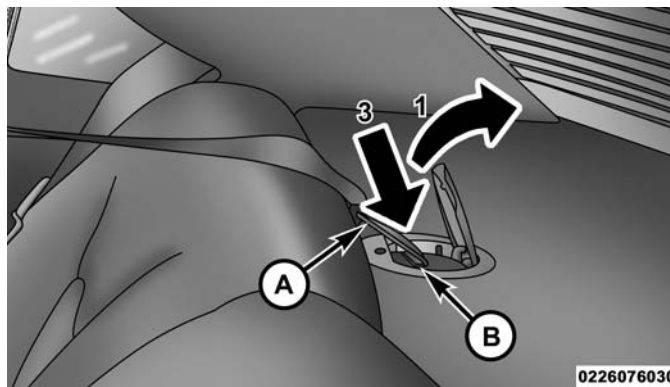

0226076030

Tether Strap Anchorages (2000–2005 Model Years)

- | | |
|---------------------|-----------------------|
| 1 — Cover | A — Tether Strap Hook |
| 3 — Attaching Strap | B — Tether Anchor |

Frequently Asked Questions About LATCH		
2000–2001 Model Years (No Lower Anchorages)		
2002–2005 Model Years		
What is the weight limit (child's weight + weight of the child restraint) for using the LATCH anchorage system to attach the child restraint?	65 lbs (29.5 kg)	Use the LATCH anchorage system until the combined weight of the child and the child restraint is 65 lbs (29.5 kg). Use the seat belt alone instead of the LATCH anchorage system once the combined weight is more than 65 lbs (29.5 kg).
Can the LATCH anchorages and the seat belt be used together to attach a rear-facing or forward-facing child restraint?	No	Do not use the seat belt when you use the LATCH anchorage system to attach a rear-facing or forward-facing child restraint.
Can two child restraints be attached using a common lower LATCH anchorage?	No	Never "share" a LATCH anchorage with two or more child restraints. If the center position does not have dedicated LATCH lower anchorages, use the seat belt to install a child seat in the center position next to a child seat using the LATCH anchorages in an outboard position.
Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	The child seat may touch the back of the front passenger seat if the child restraint manufacturer also allows contact. See your child restraint Owner's Manual for more information.
Can the head restraints be removed?	No	

Center Seat LATCH

2002–2005 Model Years

If a child restraint installed in the center position blocks the seat belt webbing or buckle for the outboard position, do not use that outboard position. If a child seat in the center position blocks the outboard LATCH anchors or seat belt, do not install a child seat in that outboard position.

This vehicle is not designed to have three child restraints installed with LATCH at the same time. You may use LATCH to install one child restraint in the center position, or two child restraints in the outboard positions. **DO NOT** install more than two child restraints using LATCH at the same time.

WARNING!

Never use the same lower anchorage to attach more than one child restraint. If you are installing LATCH-compatible child restraints next to each other, you must use the seat belt for the center position. You can then use either the LATCH anchors or the vehicle's seat belt for installing child seats in the outboard positions. Please refer to "Installing The LATCH-Compatible Child Restraint System" for typical installation instructions.


Connecting The Top Tether Strap (With Either Lower Anchors Or Vehicle Seat Belt)

When installing a forward-facing child restraint, always secure the top tether strap, up to the tether anchor weight limit, whether the child restraint is installed with the lower anchors or the vehicle seat belt.

1. Look behind the seating position where you plan to install the child restraint to find the tether anchorage. You may need to move the seat forward to provide better access to the tether anchorage. If there is no top tether anchorage for that seating position, move the child restraint to another position in the vehicle if one is available.
2. Rotate or lift the cover to access the anchor directly behind the seat where you are placing the child restraint.
3. Route the tether strap to provide the most direct path for the strap between the anchor and the child seat. If your vehicle is equipped with adjustable rear head restraints, raise the head restraint, and where possible, route the tether strap under the head restraint and between the two posts. If not possible, lower the head restraint and pass the tether strap around the outboard side of the head restraint.


Seat Belt Systems In Your Vehicle

Lap/Shoulder Belt Systems For Installing Child Restraints In This Vehicle

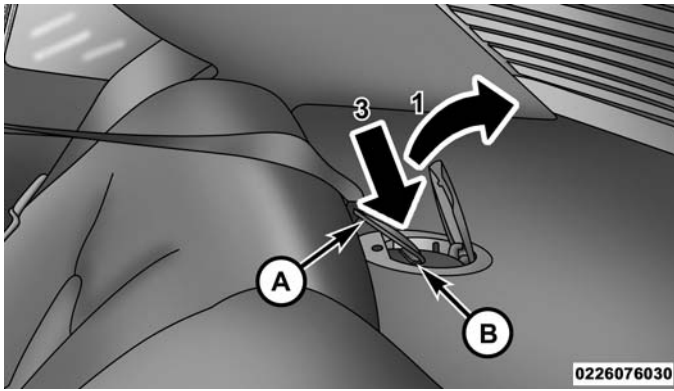

Tether Strap Anchorages

- 1 — Cover
- 3 — Attaching Strap
- A — Tether Strap Hook
- B — Tether Anchor

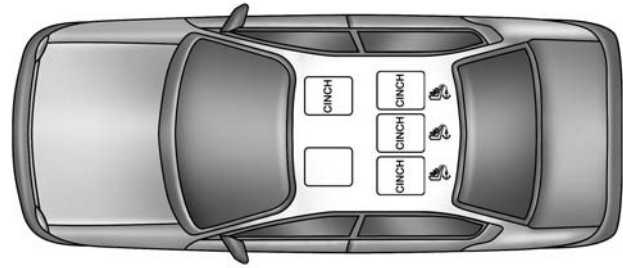


0226077520

2000–2001 Model Years

4. Attach the tether strap hook of the child restraint to the top tether anchorage as shown in the diagram.
5. Remove slack in the tether strap according to the child restraint manufacturer’s instructions.

WARNING!

- An incorrectly anchored tether strap could lead to increased head motion and possible injury to the child. Use only the anchorage position directly behind the child seat to secure a child restraint top tether strap.
- If your vehicle is equipped with a split rear seat, make sure the tether strap does not slip into the opening between the seatbacks as you remove slack in the strap.

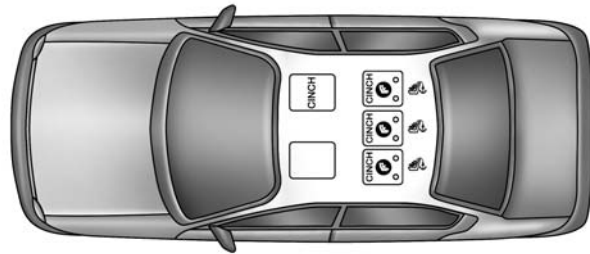

0226077523

2002–2005 Model Years

- CINCH — Cinching Latch Plate
- Lower Anchorage Symbol (2 Anchorages Per Seating Position)
- Top Tether Anchorage Symbol


Frequently Asked Questions About Seat Belts And Car Seats

What is the weight limit (child’s weight + weight of the child restraint) for using the Tether Anchor with the seat belt to attach a forward facing child restraint?	65 lbs (29.5 kg)	The Tether Anchor can be used with the seat belt until the combined weight of the child and the child restraint is 65 lbs (29.5 kg). Use the seat belt without the Tether Anchor once the combined weight is more than 65 lbs (29.5 kg).
Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	Contact between the front passenger seat and the child restraint is allowed, if the child restraint manufacturer also allows contact.
Can the head restraints be removed?	No	
Can the buckle stalk be twisted to tighten the seat belt against the belt path of the child restraint?	Yes	In positions with cinching latch plates (CINCH), the buckle stalk may be twisted up to 3 full turns.

DODGE STRATUS COUPE, 2000–2005


LATCH And Tethers In Your Vehicle

LATCH Positions For Installing Child Restraints In This Vehicle

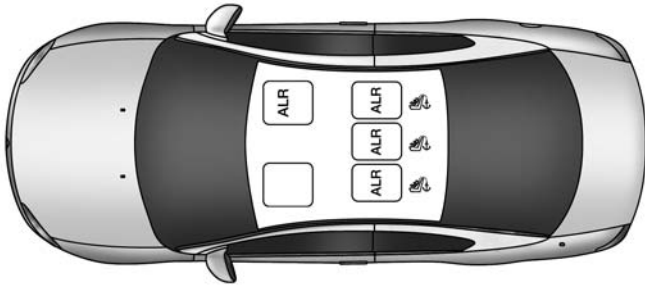

0226077525

2000–2002 Model Years

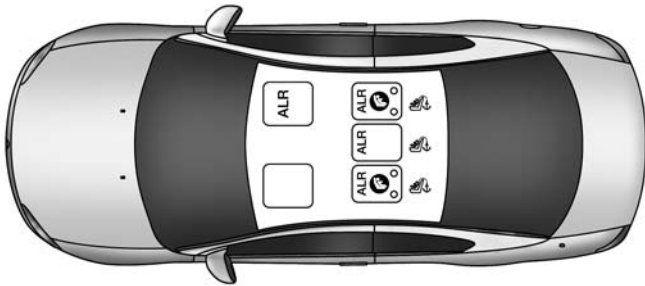

0226077526

2003–2005 Model Years


- ALR — Switchable Automatic Locking Retractor
- Lower Anchorage Symbol (2 Anchorages Per Seating Position)
- Top Tether Anchorage Symbol

Locating The LATCH Lower Anchorages In This Vehicle



0226078114

Rear Seat Has No LATCH Lower Anchorages (2000–2002 Model Years)

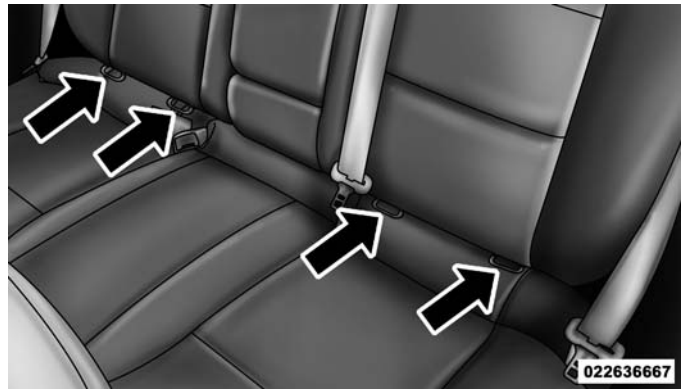


022636667

Rear Seat LATCH Lower Anchorages (2003–2005 Model Years)

Locating The Tether Anchorages In This Vehicle



There are tether strap anchorages behind each rear seating position located in the panel between the rear seatback and the rear window. They are found under a plastic cover with the tether anchorage symbol on it.

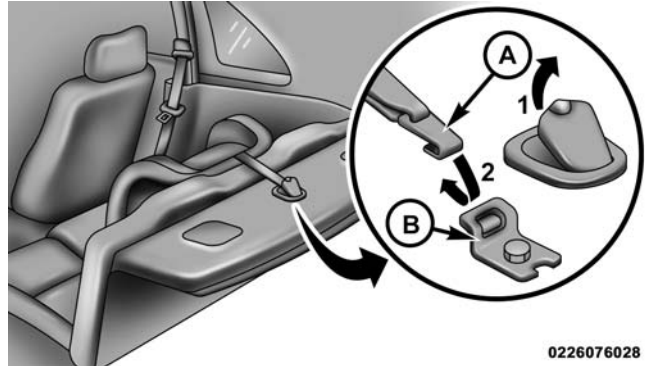

0226076028

Tether Strap Anchorages (2000–2005 Model Years)

- | | |
|-------------------------|-----------------------|
| 1 — Cover | A — Tether Strap Hook |
| 2 — Attaching The Strap | B — Tether Anchor |

Frequently Asked Questions About LATCH		
2000–2002 Model Years (No Lower Anchorages)		
2003–2005 Model Years		
What is the weight limit (child’s weight + weight of the child restraint) for using the LATCH anchorage system to attach the child restraint?	65 lbs (29.5 kg)	Use the LATCH anchorage system until the combined weight of the child and the child restraint is 65 lbs (29.5 kg). Use the seat belt alone instead of the LATCH anchorage system once the combined weight is more than 65 lbs (29.5 kg).
Can a child seat be installed in the center position using the inner LATCH lower anchorages?	No	Use the seat belt and tether anchor to install a child seat in the center seating position.
Can the LATCH anchorages and the seat belt be used together to attach a rear-facing or forward-facing child restraint?	No	Do not use the seat belt when you use the LATCH anchorage system to attach a rear-facing or forward-facing child restraint.
Can two child restraints be attached using a common lower LATCH anchorage?	No	Never “share” a LATCH anchorage with two or more child restraints.
Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	The child seat may touch the back of the front passenger seat if the child restraint manufacturer also allows contact. See your child restraint Owner’s Manual for more information.
Can the head restraints be removed?	No	

Center Seat LATCH

2003–2005 Model Years


WARNING!
<ul style="list-style-type: none"> • Do not install a child restraint in the center position using the LATCH system. This position is not approved for installing child seats using the LATCH attachments. You must use the seat belt and tether anchor to install a child seat in the center seating position. • Never use the same lower anchorage to attach more than one child restraint. Please refer to “Installing The LATCH-Compatible Child Restraint System” for typical installation instructions.

Connecting The Top Tether Strap (With Either Lower Anchors Or Vehicle Seat Belt)

When installing a forward-facing child restraint, always secure the top tether strap, up to the tether anchor weight limit, whether the child restraint is installed with the lower anchors or the vehicle seat belt.

1. Look behind the seating position where you plan to install the child restraint to find the tether anchorage. You may need to move the seat forward to provide better access to the tether anchorage. If there is no top tether anchorage for that seating position, move the child restraint to another position in the vehicle if one is available.
2. Rotate or lift the cover to access the anchor directly behind the seat where you are placing the child restraint.

3. Route the tether strap to provide the most direct path for the strap between the anchor and the child seat. If your vehicle is equipped with adjustable rear head restraints, raise the head restraint, and where possible, route the tether strap under the head restraint and between the two posts. If not possible, lower the head restraint and pass the tether strap around the outboard side of the head restraint.

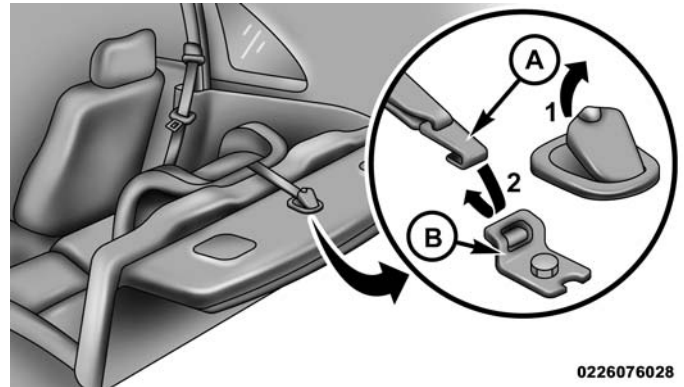

0226076028


Tether Strap Mounting

- | | |
|-------------------------|-----------------------|
| 1 — Cover | A — Tether Strap Hook |
| 2 — Attaching The Strap | B — Tether Anchor |

4. Attach the tether strap hook of the child restraint to the top tether anchorage as shown in the diagram.

5. Remove slack in the tether strap according to the child restraint manufacturer’s instructions.

WARNING!
<ul style="list-style-type: none"> • An incorrectly anchored tether strap could lead to increased head motion and possible injury to the child. Use only the anchorage position directly behind the child seat to secure a child restraint top tether strap. • If your vehicle is equipped with a split rear seat, make sure the tether strap does not slip into the opening between the seatbacks as you remove slack in the strap.

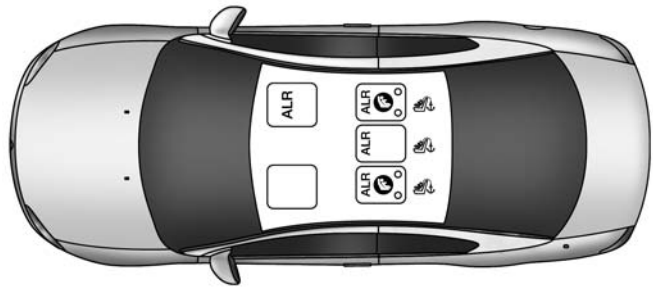


0226077526

2003–2005 Model Years

- ALR — Switchable Automatic Locking Retractor
- Lower Anchorage Symbol (2 Anchorages Per Seating Position)
- Top Tether Anchorage Symbol

Seat Belt Systems In Your Vehicle

Lap/Shoulder Belt Systems For Installing Child Restraints In This Vehicle

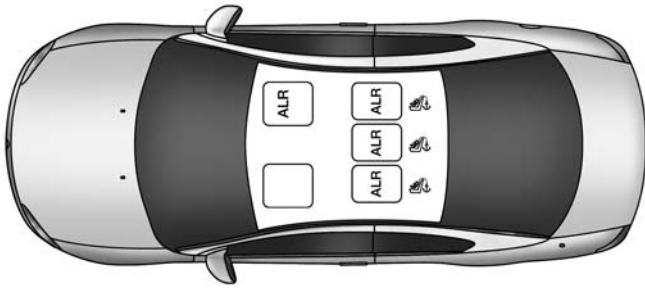

0226077525


2000–2002 Model Years

Frequently Asked Questions About Seat Belts And Car Seats		
What is the weight limit (child’s weight + weight of the child restraint) for using the Tether Anchor with the seat belt to attach a forward facing child restraint?	65 lbs (29.5 kg)	The Tether Anchor can be used with the seat belt until the combined weight of the child and the child restraint is 65 lbs (29.5 kg). Use the seat belt without the Tether Anchor once the combined weight is more than 65 lbs (29.5 kg).
Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	Contact between the front passenger seat and the child restraint is allowed, if the child restraint manufacturer also allows contact.
Can the head restraints be removed?	No	
Can the buckle stalk be twisted to tighten the seat belt against the belt path of the child restraint?	No	Do not twist the buckle stalk in a seating position with an ALR retractor.

DODGE STRATUS SEDAN, 2001–2006


LATCH And Tethers In Your Vehicle

LATCH Positions For Installing Child Restraints In This Vehicle

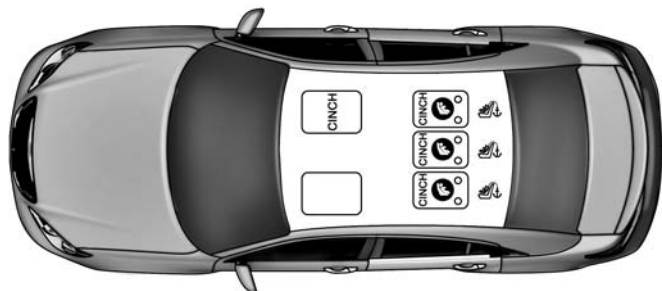

0226076771

2001–2003 Model Years

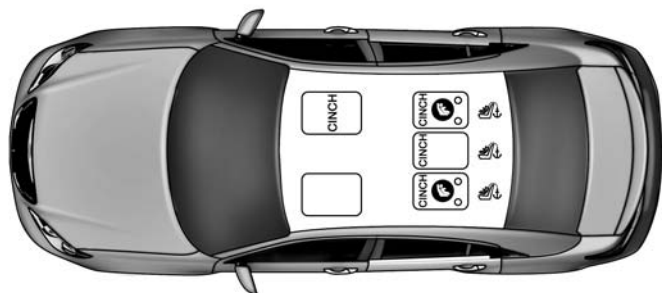


0226076773

2004–2006 Model Years


- ALR — Switchable Automatic Locking Retractor
- Lower Anchorage Symbol (2 Anchorages Per Seating Position)
- Top Tether Anchorage Symbol

Locating The LATCH Lower Anchorages In This Vehicle

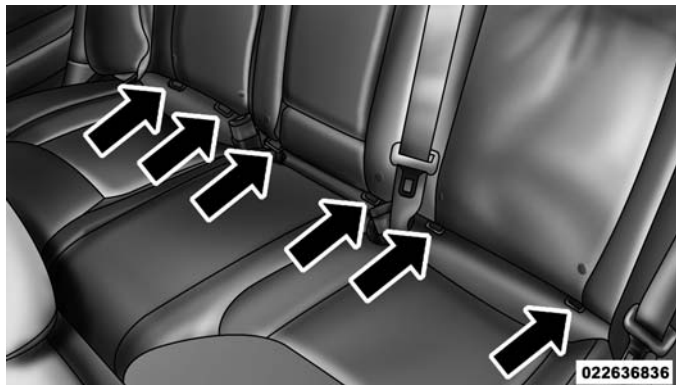

022636836

Rear Seat LATCH Lower Anchorages (2001–2003 Model Years)

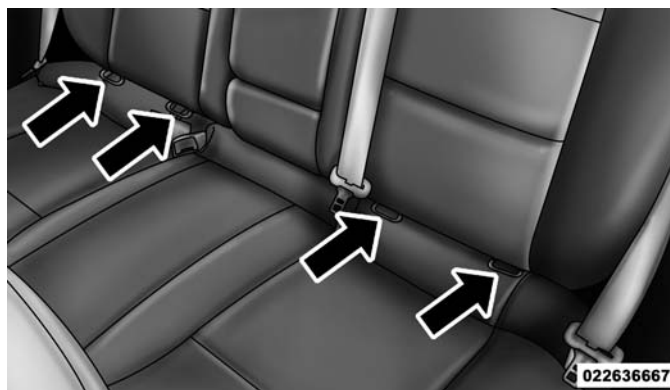


022636667

Rear Seat LATCH Lower Anchorages (2004–2006 Model Years)

Locating The Tether Anchorages In This Vehicle




There are tether strap anchorages behind each rear seating position located in the panel between the rear seatback and the rear window. They are found under a plastic cover with the tether anchorage symbol on it.

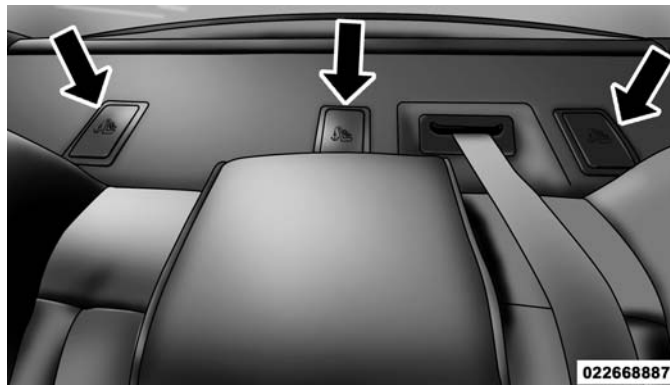

022668887

Tether Strap Anchorages

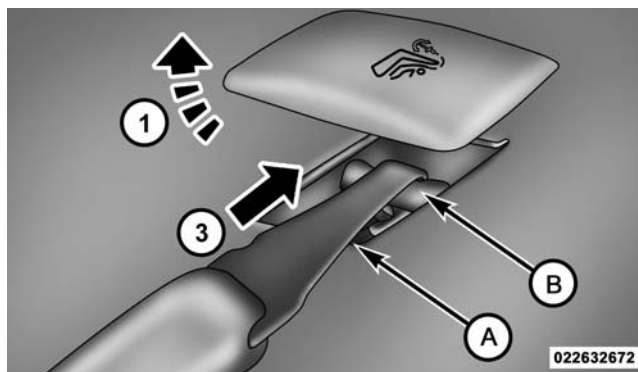

022632672

Tether Anchorages

- 1 — Cover
- 3 — Attaching Strap
- A — Tether Strap Hook
- B — Tether Anchor

Frequently Asked Questions About LATCH

2001–2003 Model Years

What is the weight limit (child's weight + weight of the child restraint) for using the LATCH anchorage system to attach the child restraint?	65 lbs (29.5 kg)	Use the LATCH anchorage system until the combined weight of the child and the child restraint is 65 lbs (29.5 kg). Use the seat belt alone instead of the LATCH anchorage system once the combined weight is more than 65 lbs (29.5 kg).
Can the LATCH anchorages and the seat belt be used together to attach a rear-facing or forward-facing child restraint?	No	Do not use the seat belt when you use the LATCH anchorage system to attach a rear-facing or forward-facing child restraint.
Can two child restraints be attached using a common lower LATCH anchorage?	No	Never "share" a LATCH anchorage with two or more child restraints.
Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	The child seat may touch the back of the front passenger seat if the child restraint manufacturer also allows contact. See your child restraint Owner's Manual for more information.
Can the head restraints be removed?	No	

2004–2006 Model Years

What is the weight limit (child's weight + weight of the child restraint) for using the LATCH anchorage system to attach the child restraint?	65 lbs (29.5 kg)	Use the LATCH anchorage system until the combined weight of the child and the child restraint is 65 lbs (29.5 kg). Use the seat belt alone instead of the LATCH anchorage system once the combined weight is more than 65 lbs (29.5 kg).
Can a child seat be installed in the center position using the inner LATCH lower anchorages?	Yes	You can install child restraints with flexible lower anchors in the center position. The inner anchorages are 15.4 inches (392 mm) apart. Do not install child restraints with rigid lower anchors in the center position.
Can the LATCH anchorages and the seat belt be used together to attach a rear-facing or forward-facing child restraint?	No	Do not use the seat belt when you use the LATCH anchorage system to attach a rear-facing or forward-facing child restraint.
Can two child restraints be attached using a common lower LATCH anchorage?	No	Never "share" a LATCH anchorage with two or more child restraints.
Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	The child seat may touch the back of the front passenger seat if the child restraint manufacturer also allows contact. See your child restraint Owner's Manual for more information.
Can the head restraints be removed?	No	

Center Seat LATCH

2001–2003 Model Years

If a child restraint installed in the center position blocks the seat belt webbing or buckle for the outboard position, do not use that outboard position. If a child seat in the center position blocks the outboard LATCH anchors or seat belt, do not install a child seat in that outboard position.

WARNING!

Never use the same lower anchorage to attach more than one child restraint. Please refer to "Installing The LATCH-Compatible Child Restraint System" for typical installation instructions.

2004–2006 Model Years

Do not install child restraints with rigid lower attachments in the center seating position. Only install this type of child restraint in the outboard seating positions. Child restraints with flexible, webbing mounted lower attachments can be installed in any rear seating position.


WARNING!

Never use the same lower anchorage to attach more than one child restraint. If you are installing LATCH-compatible child restraints next to each other, you must use the seat belt for the center position. You can then use either the LATCH anchors or the vehicle's seat belt for installing child seats in the outboard positions. Please refer to "Installing The LATCH-Compatible Child Restraint System" for typical installation instructions.

Connecting The Top Tether Strap (With Either Lower Anchors Or Vehicle Seat Belt)

When installing a forward-facing child restraint, always secure the top tether strap, up to the tether anchor weight limit, whether the child restraint is installed with the lower anchors or the vehicle seat belt.

1. Look behind the seating position where you plan to install the child restraint to find the tether anchorage. You may need to move the seat forward to provide better access to the tether anchorage. If there is no top tether anchorage for that seating position, move the child restraint to another position in the vehicle if one is available.
2. Rotate or lift the cover to access the anchor directly behind the seat where you are placing the child restraint.
3. Route the tether strap to provide the most direct path for the strap between the anchor and the child seat. If your vehicle is equipped with adjustable rear head restraints, raise the head restraint, and where possible, route the tether strap under the head restraint and between the two posts. If not possible, lower the head restraint and pass the tether strap around the outboard side of the head restraint.

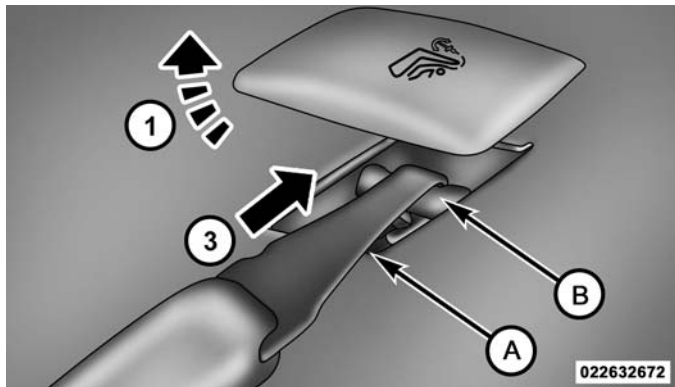

Tether Anchorages

- | | |
|---------------------|-----------------------|
| 1 — Cover | A — Tether Strap Hook |
| 3 — Attaching Strap | B — Tether Anchor |


4. Attach the tether strap hook of the child restraint to the top tether anchorage as shown in the diagram.
5. Remove slack in the tether strap according to the child restraint manufacturer’s instructions.

WARNING!

- An incorrectly anchored tether strap could lead to increased head motion and possible injury to the child. Use only the anchorage position directly behind the child seat to secure a child restraint top tether strap.
- If your vehicle is equipped with a split rear seat, make sure the tether strap does not slip into the opening between the seatbacks as you remove slack in the strap.


Seat Belt Systems In Your Vehicle

Lap/Shoulder Belt Systems For Installing Child Restraints In This Vehicle

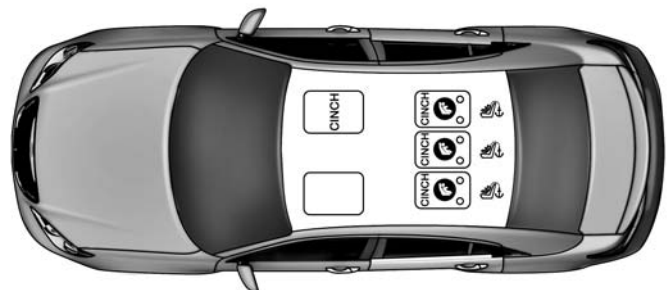

0226076771

2001–2003 Model Years

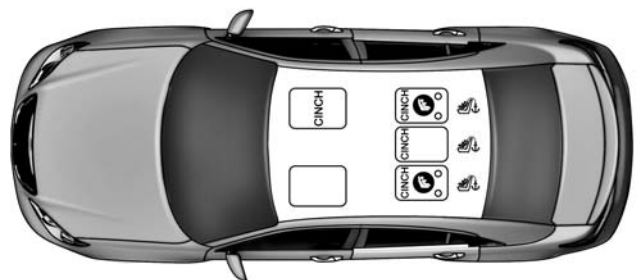

0226076773

2004–2006 Model Years


- ALR — Switchable Automatic Locking Retractor
- CINCH — Cinching Latch Plate
- Lower Anchorage Symbol (2 Anchorages Per Seating Position)
- Top Tether Anchorage Symbol

Frequently Asked Questions About Seat Belts And Car Seats		
What is the weight limit (child's weight + weight of the child restraint) for using the Tether Anchor with the seat belt to attach a forward facing child restraint?	65 lbs (29.5 kg)	The Tether Anchor can be used with the seat belt until the combined weight of the child and the child restraint is 65 lbs (29.5 kg). Use the seat belt without the Tether Anchor once the combined weight is more than 65 lbs (29.5 kg).
Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	Contact between the front passenger seat and the child restraint is allowed, if the child restraint manufacturer also allows contact.
Can the head restraints be removed?	No	
Can the buckle stalk be twisted to tighten the seat belt against the belt path of the child restraint?	Yes	In positions with cinching latch plates (CINCH), the buckle stalk may be twisted up to 3 full turns.

DODGE VIPER, 2000–2006, 2008–2010


LATCH And Tethers In Your Vehicle

LATCH Positions For Installing Child Restraints In This Vehicle

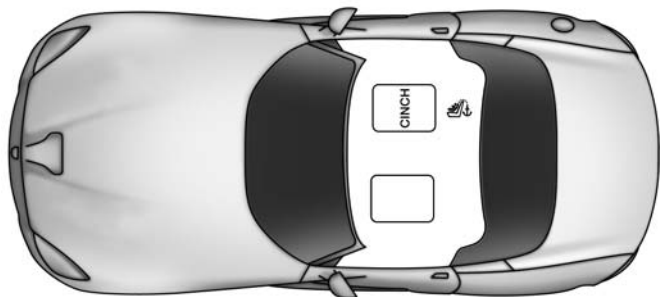


0226076778

2000–2002 Model Years

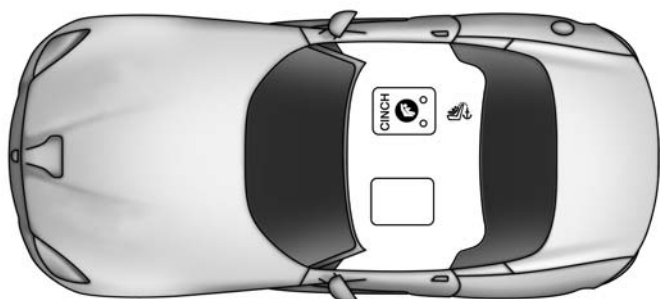


0226076779

2003–2004 Model Years

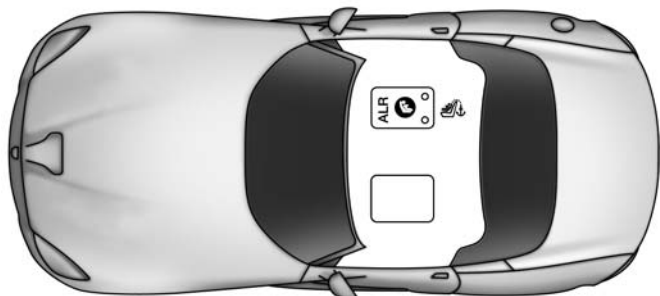

0226076780

2005–2006 Model Years

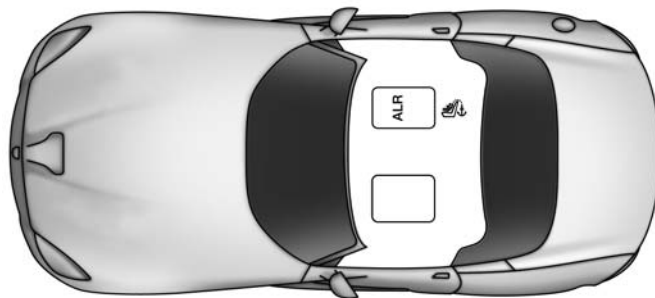


0226076781


2008–2010 Model Years

- ALR — Switchable Automatic Locking Retractor
- CINCH — Cinching Latch Plate
- Lower Anchorage Symbol (2 Anchorages Per Seating Position)
- Top Tether Anchorage Symbol

Locating The LATCH Lower Anchorages In This Vehicle

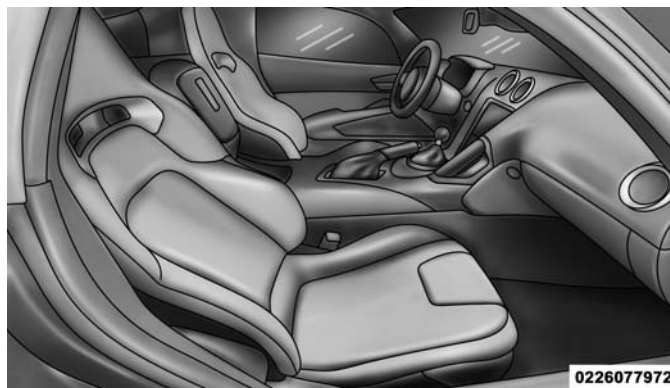

Passenger Seat Has No LATCH Lower Anchorages (2000–2002, 2008–2010 Model Years)

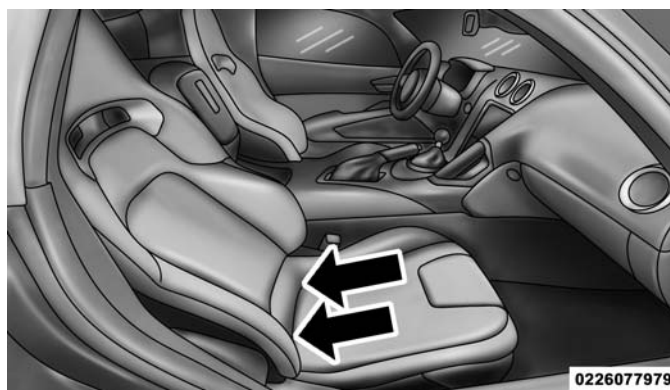


Passenger Seat LATCH Lower Anchorages (2003–2006 Model Years)


Locating The Tether Anchorage In This Vehicle



There is a tether strap anchor located behind the child tether access cover behind the passenger seat.

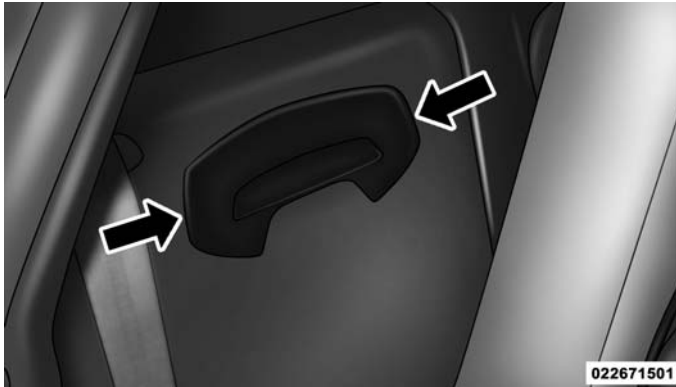

Child Seat Tether Access Cover

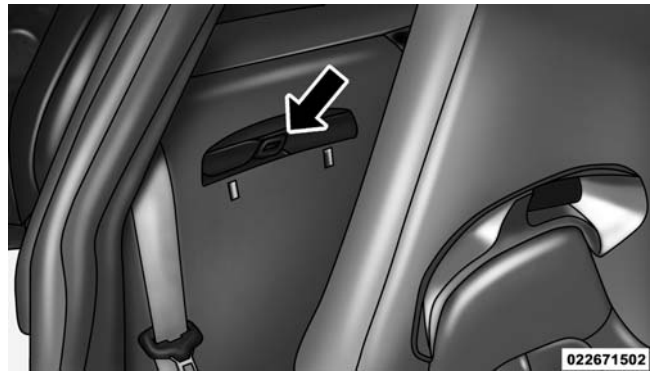

Child Seat Tether Anchor

Frequently Asked Questions About LATCH

2003–2006 Model Years

What is the weight limit (child's weight + weight of the child restraint) for using the LATCH anchorage system to attach the child restraint?	65 lbs (29.5 kg)	Use the LATCH anchorage system until the combined weight of the child and the child restraint is 65 lbs (29.5 kg). Use the seat belt alone instead of the LATCH anchorage system once the combined weight is more than 65 lbs (29.5 kg).
Can the LATCH anchorages and the seat belt be used together to attach a rear-facing or forward-facing child restraint?	No	Do not use the seat belt when you use the LATCH anchorage system to attach a rear-facing or forward-facing child restraint.
Can the head restraints be removed?	No	


Connecting The Top Tether Strap (With Either Lower Anchors Or Vehicle Seat Belt)

When installing a forward-facing child restraint, always secure the top tether strap, up to the tether anchor weight limit, whether the child restraint is installed with the lower anchors or the vehicle seat belt.

1. Move the seat forward.
2. Move the seatback to its full forward position.
3. Remove the child tether access cover by prying either side with a screwdriver or similar tool, as shown.




Child Seat Tether Access Cover

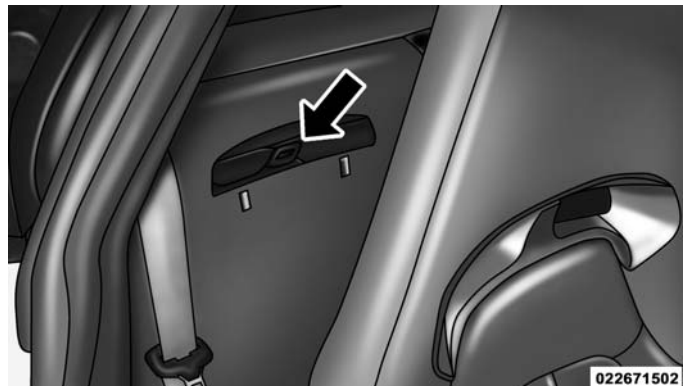


Child Seat Tether Anchor

NOTE: While the child tether is in use, keep the access cover in a safe place so that it can be replaced after use of the child tether.

4. Pass the child restraint tether hook through either opening in the seatback underneath the head restraint.
5. Attach the tether hook to the anchor loop.

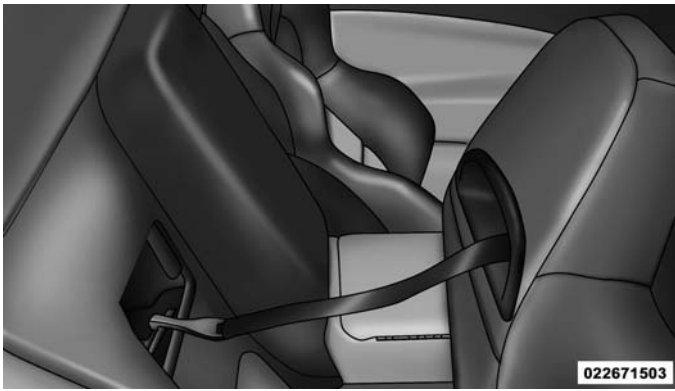

Tether Hook

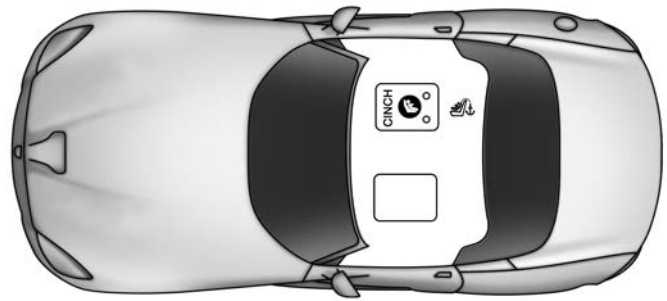


2003–2004 Model Years

0226076779

6. Move the seat to its farthest rearward position. Apply body pressure to the seat to be sure the seat adjusters have latched.
7. Return the seatback to an upright position.
8. Remove slack from the tether strap according to the child restraint manufacturer’s directions.

WARNING!

An incorrectly anchored tether strap could lead to increased head motion and possible injury to the child. Use only the anchorage position directly behind the child seat to secure a child restraint top tether strap.

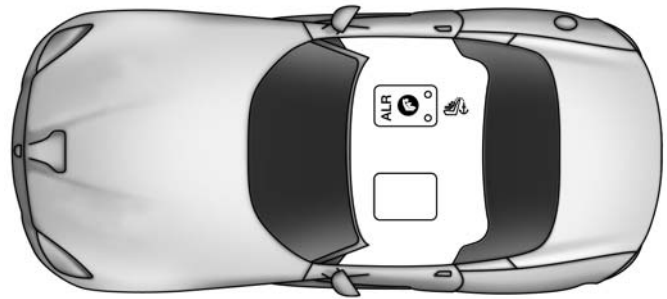


2005–2006 Model Years

0226076780


Seat Belt Systems In Your Vehicle

Lap/Shoulder Belt Systems For Installing Child Restraints In This Vehicle

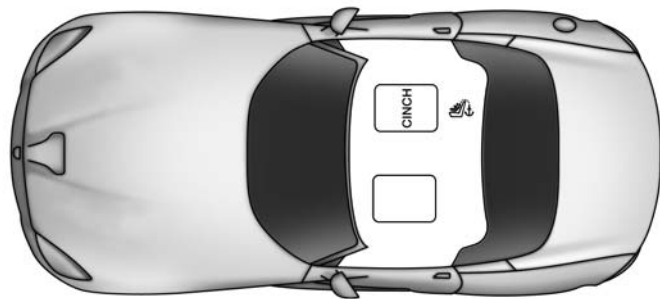

2000–2002 Model Years

0226076778

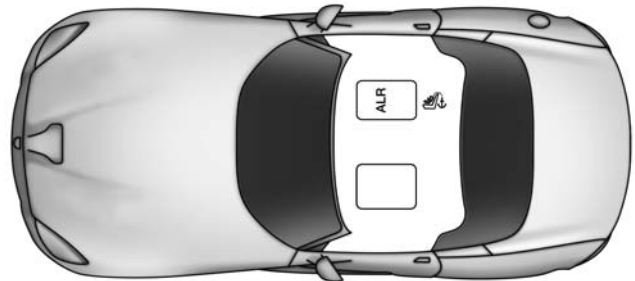

2008–2010 Model Years

0226076781

- ALR — Switchable Automatic Locking Retractor
- CINCH — Cinching Latch Plate
- Lower Anchorage Symbol (2 Anchorages Per Seating Position)
- Top Tether Anchorage Symbol

Frequently Asked Questions About Seat Belts And Car Seats		
What is the weight limit (child’s weight + weight of the child restraint) for using the Tether Anchor with the seat belt to attach a forward facing child restraint?	65 lbs (29.5 kg)	The Tether Anchor can be used with the seat belt until the combined weight of the child and the child restraint is 65 lbs (29.5 kg). Use the seat belt without the Tether Anchor once the combined weight is more than 65 lbs (29.5 kg).
Can the head restraints be removed?	No	

Frequently Asked Questions About Seat Belts And Car Seats**2000–2004 Model Years**

Can the buckle stalk be twisted to tighten the seat belt against the belt path of the child restraint?	Yes	In positions with cinching latch plates (CINCH), the buckle stalk may be twisted up to 3 full turns.
--	-----	--

2005–2006, 2008–2010 Model Years

Can the buckle stalk be twisted to tighten the seat belt against the belt path of the child restraint?	No	Do not twist the buckle stalk in a seating position with an ALR retractor.
--	----	--

INSTALLING CHILD RESTRAINTS IN YOUR VEHICLE — FIAT / PLYMOUTH / SRT


CONTENTS

■ FIAT 500/ABARTH, 2012–201388	■ PLYMOUTH PROWLER, 2000–200292
□ LATCH And Tethers In Your Vehicle88	□ LATCH And Tethers In Your Vehicle92
□ Center Seat LATCH89	□ Connecting The Top Tether Strap (With The Vehicle Seat Belt)92
□ Connecting The Top Tether Strap (With Either Lower Anchors Or Vehicle Seat Belt)89	□ Seat Belt Systems In Your Vehicle92
□ Seat Belt Systems In Your Vehicle89	■ SRT VIPER, 201394
■ PLYMOUTH NEON, 2000–200190	□ LATCH And Tethers In Your Vehicle94
□ LATCH And Tethers In Your Vehicle90	□ Connecting The Top Tether Strap (With The Vehicle Seat Belt)94
□ Connecting The Top Tether Strap (With The Vehicle Seat Belt)90	□ Seat Belt Systems In Your Vehicle95
□ Seat Belt Systems In Your Vehicle91		

FIAT 500/ABARTH, 2012–2013

LATCH And Tethers In Your Vehicle

LATCH Positions For Installing Child Restraints In This Vehicle

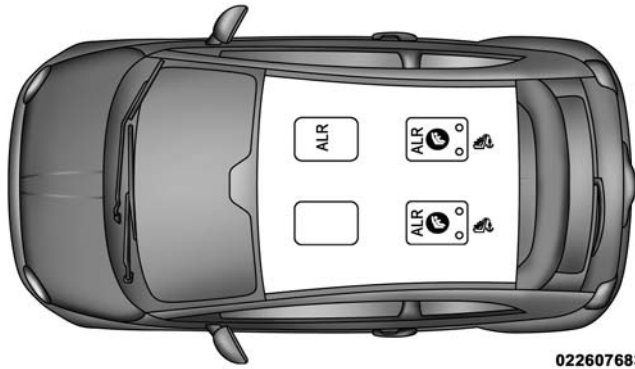


0226076835

2012–2013 Model Years

- ALR — Switchable Automatic Locking Retractor
- Lower Anchorage Symbol (2 Anchorages Per Seating Position)
- Top Tether Anchorage Symbol

Locating The LATCH Lower Anchorages In This Vehicle

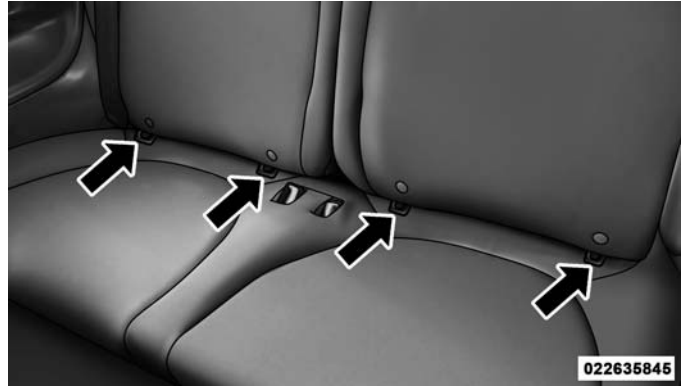


022635845

Rear Seat LATCH Lower Anchorages

Locating The Tether Anchorages In This Vehicle



There are tether strap anchors located behind each rear seatback, near the floor.

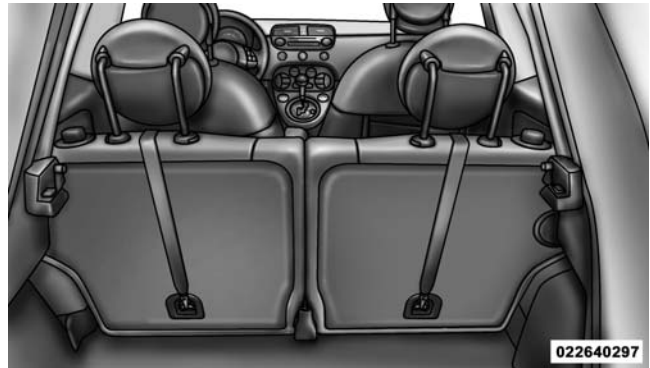

022640297

Rear Seat Tether Anchors

Frequently Asked Questions About LATCH

What is the weight limit (child’s weight + weight of the child restraint) for using the LATCH anchorage system to attach the child restraint?	65 lbs (29.5 kg)	Use the LATCH anchorage system until the combined weight of the child and the child restraint is 65 lbs (29.5 kg). Use the seat belt and tether anchor instead of the LATCH system once the combined weight is more than 65 lbs (29.5 kg).
Can the LATCH anchorages and the seat belt be used together to attach a rear-facing or forward-facing child restraint?	No	Do not use the seat belt when you use the LATCH anchorage system to attach a rear-facing or forward-facing child restraint.
Can two child restraints be attached using a common lower LATCH anchorage?	No	Never “share” a LATCH anchorage with two or more child restraints. If the center position does not have dedicated LATCH lower anchorages, use the seat belt to install a child seat in the center position next to a child seat using the LATCH anchorages in an outboard position.
Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	The child seat may touch the back of the front passenger seat if the child restraint manufacturer also allows contact. See your child restraint Owner’s Manual for more information.
Can the head restraints be removed?	Yes	Yes, all may be removed.

Center Seat LATCH

WARNING!

This vehicle does not have a center seating position. Do not use the center lower LATCH anchorages to install a child seat in the center of the back seat.

Connecting The Top Tether Strap (With Either Lower Anchors Or Vehicle Seat Belt)

When installing a forward-facing child restraint, always secure the top tether strap, up to the tether anchor weight limit, whether the child restraint is installed with the lower anchors or the vehicle seat belt.

1. Look behind the seating position where you plan to install the child restraint to find the tether anchorage. You may need to move the seat forward to provide better access to the tether anchorage. If there is no top tether anchorage for that seating position, move the child restraint to another position in the vehicle if one is available.
2. Route the tether strap to provide the most direct path for the strap between the anchor and the child seat. If your vehicle is equipped with adjustable rear head restraints, raise the head restraint, and where possible, route the tether strap under the head restraint and between the two posts. If not possible, lower the head restraint and pass the tether strap around the outboard side of the head restraint.
3. Attach the tether strap hook of the child restraint to the top tether anchorage as shown in the diagram.



Rear Seat Tether Strap Mounting


4. Remove slack in the tether strap according to the child restraint manufacturer's instructions.

WARNING!

- An incorrectly anchored tether strap could lead to increased head motion and possible injury to the child. Use only the anchorage position directly behind the child seat to secure a child restraint top tether strap.
- If your vehicle is equipped with a split rear seat, make sure the tether strap does not slip into the opening between the seatbacks as you remove slack in the strap.

Seat Belt Systems In Your Vehicle

Lap/Shoulder Belt Systems For Installing Child Restraints In This Vehicle

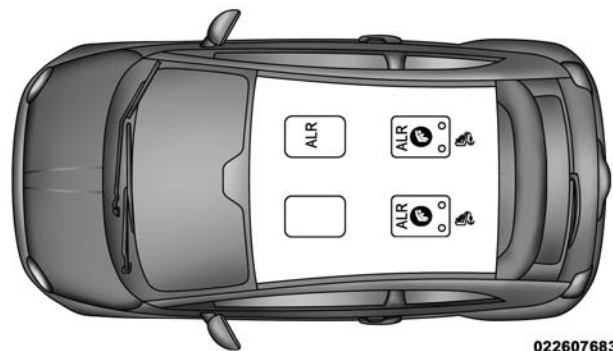

2012–2013 Model Years

- ALR — Switchable Automatic Locking Retractor
- Lower Anchorage Symbol (2 Anchorages Per Seating Position)
- Top Tether Anchorage Symbol


Frequently Asked Questions About Seat Belts And Car Seats

What is the weight limit (child's weight + weight of the child restraint) for using the Tether Anchor with the seat belt to attach a forward facing child restraint?	Weight limit of the Child Restraint	Always use the tether anchor when using the seat belt to install a forward facing child restraint, up to the recommended weight limit of the child restraint.
Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	Contact between the front passenger seat and the child restraint is allowed, if the child restraint manufacturer also allows contact.
Can the head restraints be removed?	Yes	Yes, all may be removed
Can the buckle stalk be twisted to tighten the seat belt against the belt path of the child restraint?	No	Do not twist the buckle stalk in a seating position with an ALR retractor.

PLYMOUTH NEON, 2000–2001


LATCH And Tethers In Your Vehicle

LATCH Positions For Installing Child Restraints In This Vehicle

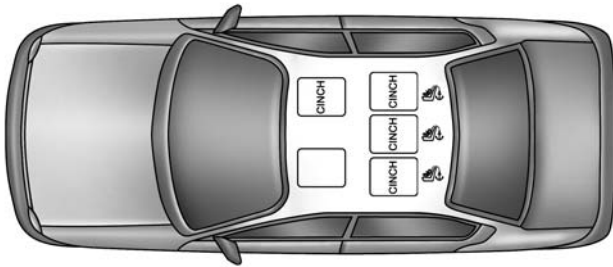

0226077520

2000–2001 Model Years

- CINCH — Cinching Latch Plate
-  Top Tether Anchorage Symbol


Locating The LATCH Lower Anchorages In This Vehicle

0226078116

Rear Seat Has No LATCH Lower Anchorages
(2000–2001 Model Years)

Locating The Tether Anchorages In This Vehicle

There are tether strap anchorages behind each rear seating position located in the panel between the rear seatback and the rear window. They are found under a plastic cover with the tether anchorage symbol on it.

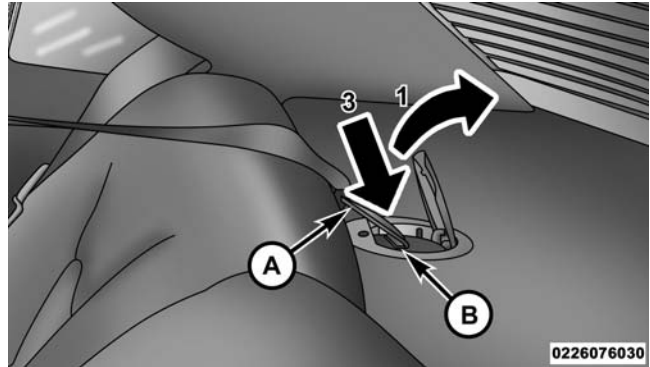

0226076030


Tether Strap Anchorages (2000–2001 Model Years)

- | | |
|---------------------|-----------------------|
| 1 — Cover | A — Tether Strap Hook |
| 3 — Attaching Strap | B — Tether Anchor |

Connecting The Top Tether Strap (With The Vehicle Seat Belt)

When installing a forward-facing child restraint, always secure the top tether strap, up to the tether anchor weight limit.

1. Look behind the seating position where you plan to install the child restraint to find the tether anchorage. You may need to move the seat forward to provide better access to the tether anchorage. If there is no top tether anchorage for that seating position, move the child restraint to another position in the vehicle if one is available.
2. Rotate or lift the cover to access the anchor directly behind the seat where you are placing the child restraint.
3. Route the tether strap to provide the most direct path for the strap between the anchor and the child seat. If your vehicle is equipped with adjustable rear head restraints, raise the head restraint, and where possible, route the tether strap under the head restraint and between the two posts. If not possible, lower the head restraint and pass the tether strap around the outboard side of the head restraint.

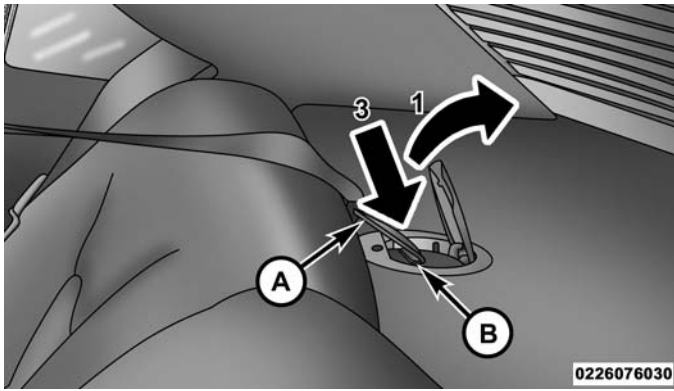


Tether Strap Anchorages

- 1 — Cover
- 3 — Attaching Strap
- A — Tether Strap Hook
- B — Tether Anchor

Seat Belt Systems In Your Vehicle

Lap/Shoulder Belt Systems For Installing Child Restraints In This Vehicle

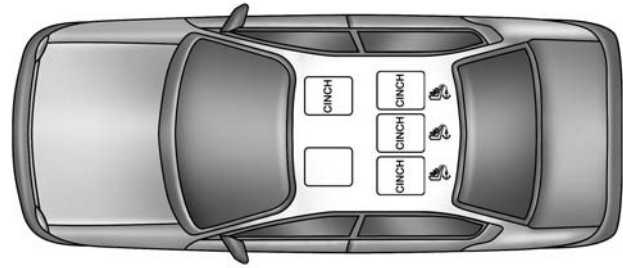

0226077520

2000–2001 Model Years

- CINCH — Cinching Latch Plate
- Top Tether Anchorage Symbol

4. Attach the tether strap hook of the child restraint to the top tether anchorage as shown in the diagram.
5. Remove slack in the tether strap according to the child restraint manufacturer’s instructions.

WARNING!

- An incorrectly anchored tether strap could lead to increased head motion and possible injury to the child. Use only the anchorage position directly behind the child seat to secure a child restraint top tether strap.
- If your vehicle is equipped with a split rear seat, make sure the tether strap does not slip into the opening between the seatbacks as you remove slack in the strap.


Frequently Asked Questions About Seat Belts And Car Seats

What is the weight limit (child’s weight + weight of the child restraint) for using the Tether Anchor with the seat belt to attach a forward facing child restraint?	65 lbs (29.5 kg)	The Tether Anchor can be used with the seat belt until the combined weight of the child and the child restraint is 65 lbs (29.5 kg). Use the seat belt without the Tether Anchor once the combined weight is more than 65 lbs (29.5 kg).
Can the rear-facing child restraint touch the back of the front passenger seat?	Yes	Contact between the front passenger seat and the child restraint is allowed, if the child restraint manufacturer also allows contact.
Can the head restraints be removed?	No	
Can the buckle stalk be twisted to tighten the seat belt against the belt path of the child restraint?	Yes	In positions with cinching latch plates (CINCH), the buckle stalk may be twisted up to 3 full turns.


PLYMOUTH PROWLER, 2000–2002

LATCH And Tethers In Your Vehicle

LATCH Positions For Installing Child Restraints In This Vehicle

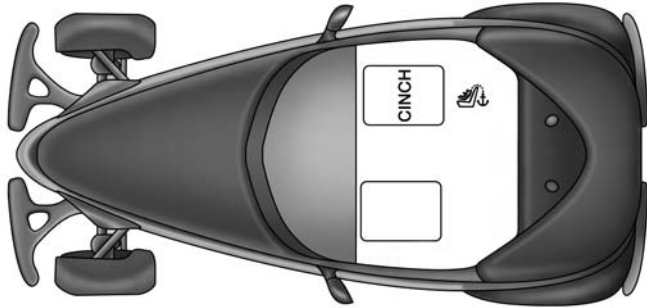

0226076816

- CINCH — Cinching Latch Plate
-  Top Tether Anchorage Symbol

Locating The LATCH Lower Anchorages In This Vehicle




0226078117

Passenger Seat Has No LATCH Lower Anchorages (2000–2002 Model Years)

Locating The Tether Anchorage In This Vehicle



There is a tether strap anchor located behind the passenger seat.

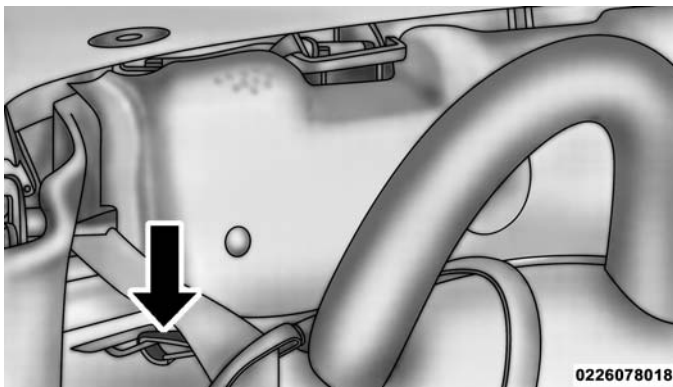


0226078018

Passenger Seat Tether Strap Anchorage

Connecting The Top Tether Strap (With The Vehicle Seat Belt)

When installing a forward-facing child restraint, always secure the top tether strap, up to the tether anchor weight limit.

1. Move the seatback fully forward.
2. Pass the child restraint strap hook through the opening under the head restraint. Attach the hook to the anchor loop, recline the seat back full rearward and move the seat to its most rearward position.

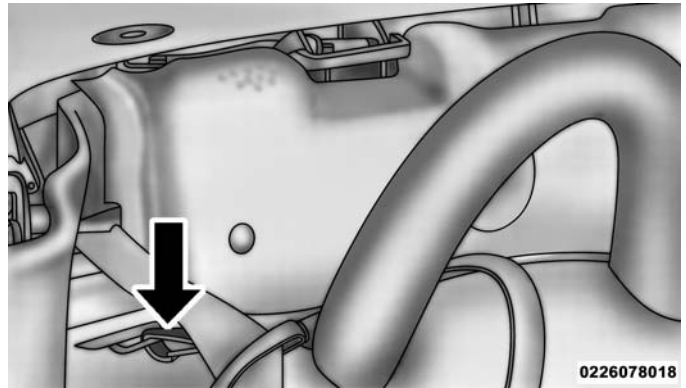

0226078018

Passenger Seat Tether Strap Anchorages


3. Install the child restraint according to the manufacturer's directions.
4. Return the seat back to an upright position.
5. Remove the slack from the tether strap according to the child restraint manufacturer's directions.

WARNING!

An incorrectly anchored tether strap could lead to increased head motion and possible injury to the child. Use only the anchorage position directly behind the child seat to secure a child restraint top tether strap.


Seat Belt Systems In Your Vehicle

Lap/Shoulder Belt Systems For Installing Child Restraints In This Vehicle

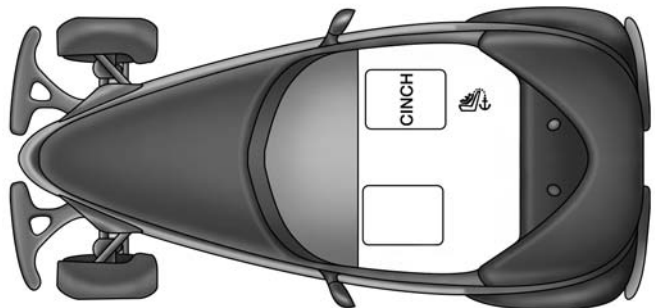

0226076816

2000–2002 Model Years

- CINCH — Cinching Latch Plate
-  Top Tether Anchorage Symbol


Frequently Asked Questions About Seat Belts And Car Seats

<p>What is the weight limit (child's weight + weight of the child restraint) for using the Tether Anchor with the seat belt to attach a forward facing child restraint?</p>	<p>65 lbs (29.5 kg)</p>	<p>The Tether Anchor can be used with the seat belt until the combined weight of the child and the child restraint is 65 lbs (29.5 kg). Use the seat belt without the Tether Anchor once the combined weight is more than 65 lbs (29.5 kg).</p>
<p>Can the head restraints be removed?</p>	<p>No</p>	
<p>Can the buckle stalk be twisted to tighten the seat belt against the belt path of the child restraint?</p>	<p>Yes</p>	<p>In positions with cinching latch plates (CINCH), the buckle stalk may be twisted up to 3 full turns.</p>

SRT VIPER, 2013


LATCH And Tethers In Your Vehicle

LATCH Positions For Installing Child Restraints In This Vehicle

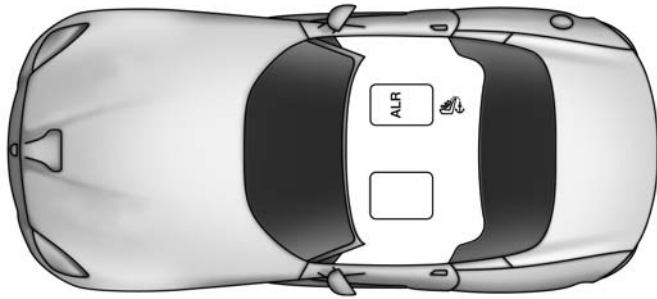


0226076781

2013 Model Year

- ALR — Switchable Automatic Locking Retractor
-  Top Tether Anchorage Symbol

Locating The LATCH Lower Anchorages In This Vehicle

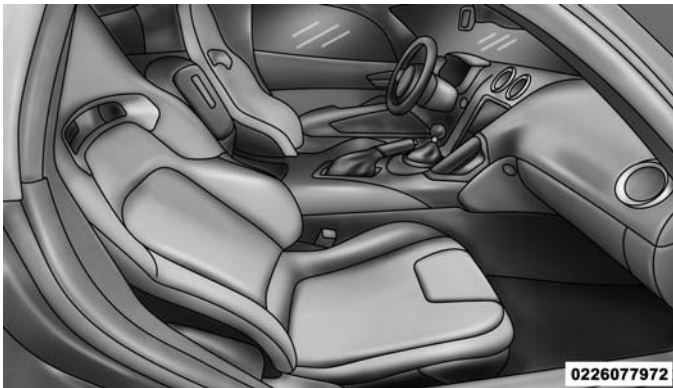


0226077972

Passenger Seat Has No LATCH Lower Anchorages (2013 Model Year)

Locating The Tether Anchorage In This Vehicle




There is a tether strap anchor located behind the child tether access cover behind the passenger seat.

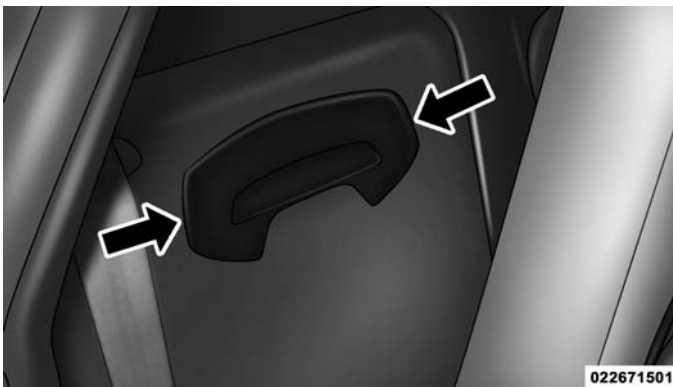

022671501

Child Seat Tether Access Cover

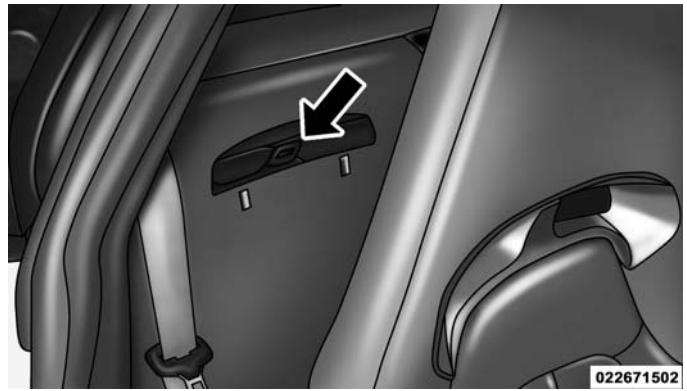


022671502

Child Seat Tether Anchor

Connecting The Top Tether Strap (With The Vehicle Seat Belt)


When installing a forward-facing child restraint, always secure the top tether strap, up to the tether anchor weight limit.

1. Move the seat forward.
2. Move the seatback to its full forward position.
3. Remove the child tether access cover by prying either side with a screwdriver or similar tool, as shown.

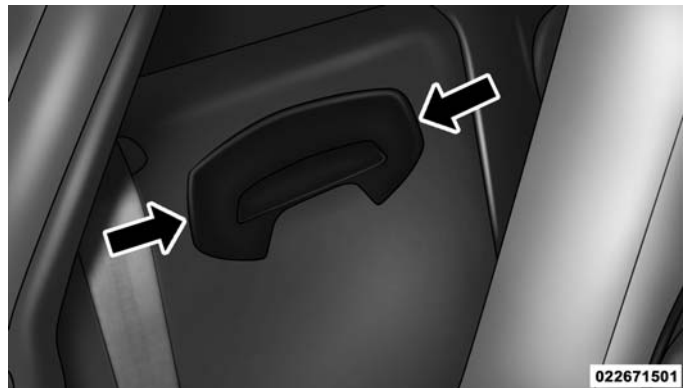

022671501

Child Seat Tether Access Cover

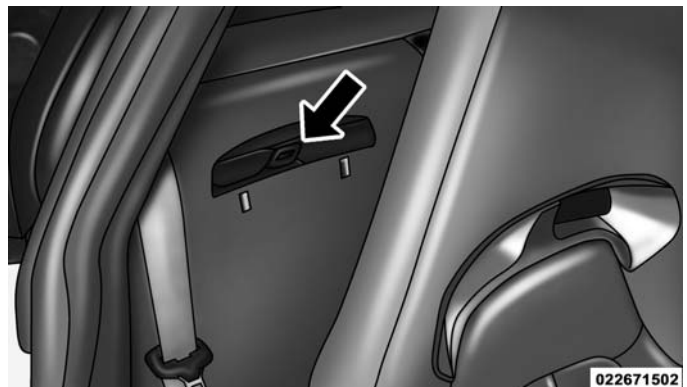


022671502

Child Seat Tether Anchor

NOTE: While the child tether is in use, keep the access cover in a safe place so that it can be replaced after use of the child tether.

4. Pass the child restraint tether hook through either opening in the seatback underneath the head restraint.
5. Attach the tether hook to the anchor loop.

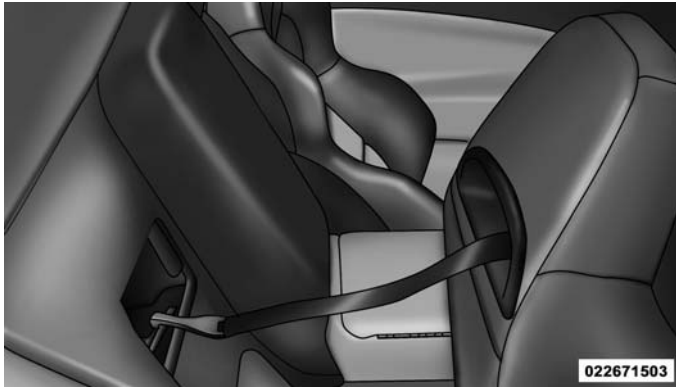

Tether Hook


6. Move the seat to its farthest rearward position. Apply body pressure to the seat to be sure the seat adjusters have latched.
7. Return the seatback to an upright position.
8. Remove slack from the tether strap according to the child restraint manufacturer's directions.

WARNING!

An incorrectly anchored tether strap could lead to increased head motion and possible injury to the child. Use only the anchorage position directly behind the child seat to secure a child restraint top tether strap.


Seat Belt Systems In Your Vehicle

Lap/Shoulder Belt Systems For Installing Child Restraints In This Vehicle

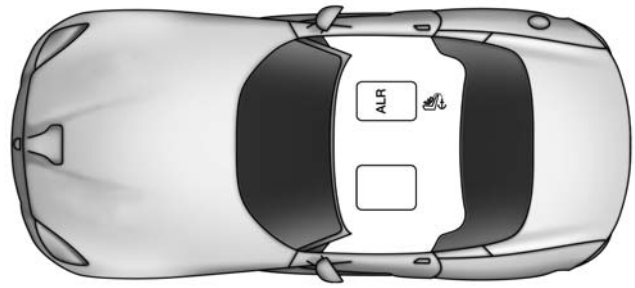

0226076781

2013 Model Year

- ALR — Switchable Automatic Locking Retractor
-  Top Tether Anchorage Symbol

Frequently Asked Questions About Seat Belts And Car Seats

What is the weight limit (child's weight + weight of the child restraint) for using the Tether Anchor with the seat belt to attach a forward facing child restraint?	Weight limit of the Child Restraint	Always use the tether anchor when using the seat belt to install a forward facing child restraint, up to the recommended weight limit of the child restraint.
Can the head restraints be removed?	No	
Can the buckle stalk be twisted to tighten the seat belt against the belt path of the child restraint?	No	Do not twist the buckle stalk in a seating position with an ALR retractor.

INDEX

- Automatic Locking Retractor (ALR) 6
- Center Seat LATCH 7, 10, 13, 16, 19, 23, 31, 35, 40, 43, 47, 52, 55, 58, 61, 64, 67, 71, 74, 77, 80, 89
- Child Restraints 5
- Connecting The Top Tether Strap . . 10, 13, 16, 19, 23, 27, 28, 31, 35, 40, 43, 48, 52, 55, 58, 61, 64, 67, 71, 74, 77, 81, 84, 89, 90, 92, 94
- Frequently Asked Questions About LATCH. 12, 15, 19, 23, 26, 28, 30, 33, 38, 42, 46, 51, 54, 57, 60, 63, 67, 70, 73, 76, 79, 84, 88, 90, 92, 94
- Frequently Asked Questions About Seat Belts And Car Seats 11, 14, 17, 20, 24, 27, 29, 31, 36, 41, 44, 48, 53, 56, 59, 62, 65, 68, 71, 75, 78, 81, 85, 89, 91, 92, 95
- How To Stow An Unused ALR Seat Belt. 6
- Installing A Child Restraint With A Cinching Latch Plate 7
- Installing A Child Restraint With ALR 6
- Installing Child Restraints In Your Vehicle. . . . 1, 9, 51, 88
- Installing Child Restraints Using The LATCH Lower Anchorages 5
- Installing Child Restraints Using The Top Tether Anchorage 7
- Installing Child Restraints Using The Vehicle Seat Belt. . . 6
- LATCH And Tethers In Your Vehicle 9, 12, 15, 18, 22, 26, 28, 30, 33, 38, 42, 45, 51, 54, 57, 60, 63, 66, 70, 73, 76, 79, 83, 88, 90, 92, 94
- LATCH Lower Anchorages 9, 12, 15, 18, 22, 26, 28, 30, 33, 38, 42, 45, 51, 54, 57, 60, 63, 66, 70, 73, 76, 79, 83, 88, 90, 92, 94
- Locating The LATCH And Tether Anchorages. 5, 9, 12, 15, 18, 22, 26, 28, 30, 33, 38, 42, 45, 51, 54, 57, 60, 63, 66, 70, 73, 76, 79, 83, 88, 90, 92, 94
- Lower Anchors And Tether For CHildren (LATCH) 5
- Rear Facing Car Seats And Air Bags. 5
- Seat Belt Systems In Your Vehicle 11, 14, 17, 20, 24, 27, 29, 31, 36, 41, 44, 48, 53, 56, 59, 62, 65, 68, 71, 75, 78, 81, 85, 89, 91, 92, 95
- Top Tether Anchorages 7, 9, 10, 12, 13, 15, 16, 19, 23, 26, 27, 28, 30, 31, 33, 35, 38, 40, 42, 43, 46, 48, 51, 52, 54, 55, 57, 58, 60, 61, 63, 64, 67, 70, 71, 73, 74, 76, 77, 79, 81, 84, 88, 89, 90, 92, 94

